

HammerHead Showers BIDET-CH

HammerHead Showers Solid Metal Handheld Bidet Sprayer

Model: BIDET-CH

Brand: HammerHead Showers

INTRODUCTION

Thank you for choosing the HammerHead Showers Solid Metal Handheld Bidet Sprayer. This manual provides essential information for the safe and efficient installation, operation, and maintenance of your new bidet sprayer. Please read these instructions thoroughly before installation and keep them for future reference.

SAFETY INFORMATION

- Always turn off the toilet's water supply valve before beginning installation or performing any maintenance.
- Ensure all connections are hand-tightened first, then gently tightened with a wrench to prevent cross-threading or overtightening, which can cause leaks.
- Do not leave the T-valve open when the bidet is not in use to prevent unnecessary pressure build-up and potential leaks.
- If you notice any leaks, immediately turn off the water supply and re-check all connections.
- Use only the provided components or approved replacements.

PACKAGE CONTENTS

Verify that all components are present before beginning installation:

- Solid Metal Handheld Bidet Sprayer
- 59-Inch Flexible Metal Hose
- Leak-Proof T-Valve Adapter
- Bidet Holder (for toilet tank or wall mount)
- Rubber Washers (pre-installed in connections)
- Thread Seal Tape (optional, for stubborn leaks)

SUPER EASY TO INSTALL IN MINUTES



**BIDET
SPRAYER**



**BIDET
HOLDER**



**BIDET
HOSE**



T-VALVE



● DETAILED INSTRUCTIONS INCLUDED

Image: The main components of the bidet sprayer kit, including the handheld sprayer, mounting bracket, flexible hose, and T-valve, laid out for easy identification.

SETUP AND INSTALLATION

Follow these steps for a quick and easy installation. You will need a towel and an adjustable wrench or pliers with protective caps.

Your browser does not support the video tag.

Video: A step-by-step guide demonstrating the installation process of the HammerHead Showers Handheld Bidet Sprayer to a toilet.

1. **Turn off Water Supply:** Locate the water supply valve for your toilet, usually on the wall or floor beneath the toilet tank. Turn it clockwise until the water flow stops completely. Flush the toilet to empty the tank and relieve pressure.
2. **Disconnect Toilet Supply Line:** Place a towel underneath the toilet's water supply connection to catch any residual water. Unscrew the flexible supply line from the bottom of the toilet tank.
3. **Attach T-Valve:** Screw the T-valve adapter onto the bottom of the toilet tank where you just removed the supply line.

Ensure the rubber washer is properly seated inside the T-valve connection. Hand-tighten, then use a wrench for a snug fit, being careful not to overtighten the plastic nipple of the toilet tank. Position the T-valve so the lever is easily accessible.

4. **Reconnect Toilet Supply Line:** Connect the original toilet supply line to the bottom of the T-valve. Hand-tighten, then use a wrench for a snug fit.
5. **Attach Bidet Hose:** Connect the flexible bidet hose to the side outlet of the T-valve. Ensure the rubber washer is in place. Hand-tighten.
6. **Attach Bidet Sprayer:** Connect the handheld bidet sprayer to the other end of the flexible hose. Hand-tighten only; no tools are needed for this connection.
7. **Attach Bidet Holder:** The bidet holder can be attached to the toilet tank by sliding it under the toilet seat, or it can be wall-mounted using the included hardware (unscrew the holder from the tank hook first).
8. **Slowly Turn on T-Valve:** Slowly turn the main water supply valve back on counter-clockwise. Check for any leaks at all connection points. If leaks occur, turn off the water, tighten the connection slightly, and re-check.
9. **Test for Leaks:** Once the toilet tank has refilled, check all connections again for leaks.

PROPRIETARY LEAK-PROOF T-VALVE



**Proprietary Cone
Washer Creates
A Water-Tight Seal**

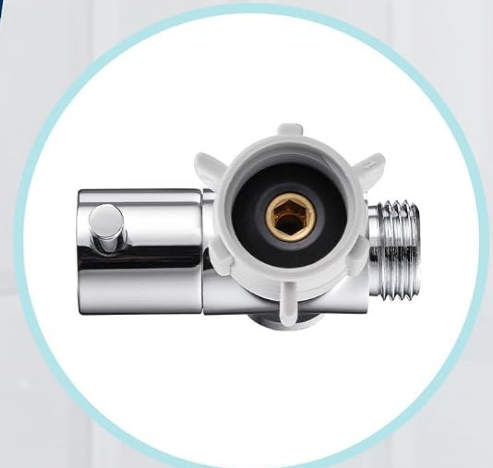


Image: A detailed view of the proprietary T-valve, highlighting its design with a cone washer that ensures a water-tight seal and prevents backflow.

OPERATING INSTRUCTIONS

- 1. Activate Water Flow:** When ready to use, slowly turn the lever on the T-valve to open the water flow to the bidet sprayer. Adjust the lever to control the water pressure.
- 2. Use Sprayer:** Aim the sprayer and press the trigger on the handheld unit to release water. Adjust the pressure as needed for comfort and effectiveness.
- 3. Turn Off Water:** After use, release the trigger and turn the T-valve lever back to the OFF position (usually perpendicular to the water flow) to prevent continuous pressure on the hose and sprayer.



Image: Demonstrates how to adjust the water pressure using the T-valve and the handheld sprayer for personalized cleaning.

MAINTENANCE

- Regular Cleaning:** Clean the bidet sprayer and hose regularly with a mild soap and water solution. Avoid abrasive cleaners or harsh chemicals that could damage the finish.
- Check for Leaks:** Periodically inspect all connections for any signs of leaks. Tighten connections as needed.
- Winterization (if applicable):** If the bidet is installed in an unheated area subject to freezing temperatures, disconnect the bidet and drain the water to prevent damage.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Water leaking from connections	Loose connections, missing/damaged rubber washers, cross-threaded connections.	Turn off water supply. Tighten connections. Ensure rubber washers are correctly seated. Apply thread seal tape if necessary.
No water flow or low pressure	Water supply valve closed, T-valve closed, clogged sprayer head.	Ensure main water supply and T-valve are fully open. Check sprayer head for mineral buildup and clean if necessary.
Sprayer drips after use	T-valve not fully closed.	Ensure the T-valve is completely closed after each use.

SPECIFICATIONS

- Brand:** HammerHead Showers
- Model Name:** BIDET-CH
- Material:** Brass, Stainless Steel
- Finish Type:** Polished
- Color:** Silver
- Hose Length:** 59-Inch
- Item Weight:** 2.05 pounds
- Product Dimensions:** 7.87 x 6.2 x 3.07 inches
- Mounting Type:** Protruding (Toilet Tank or Wall)
- Included Components:** Sprayer, Hose, T-Valve

WARRANTY AND SUPPORT

HammerHead Showers products are built to last and are backed by a warranty. For specific warranty details or support, please visit the official HammerHead Showers website or contact customer service.



Image: An illustration emphasizing the durable, solid metal construction of the bidet sprayer and T-valve, along with a 'Backed for Life' guarantee.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question