

[Manuals.plus](#) /

› [Kastar](#) /

› Kastar BT184342 / BT284342 Ni-MH Battery Replacement User Manual

Kastar MH-6B-BT8300-V

Kastar BT184342 / BT284342 Ni-MH Battery Replacement User Manual

Model: MH-6B-BT8300-V

INTRODUCTION

This manual provides essential instructions for the safe and effective use of your Kastar BT184342 / BT284342 Ni-MH rechargeable battery replacements. Please read this manual thoroughly before installation and use to ensure optimal performance and longevity of your batteries.

SETUP

Initial Charging


Important: Before first use, charge the battery for a minimum of 16 hours.



Image: The Kastar battery showing a label with the instruction to charge for a minimum of 16 hours before use. This ensures the battery reaches its full capacity.

Connector and Polarity Check

Before inserting the battery, carefully check your device's battery connector and ensure the polarity (red and black cable positions) matches the battery connector. Incorrect connection can damage the battery or device.

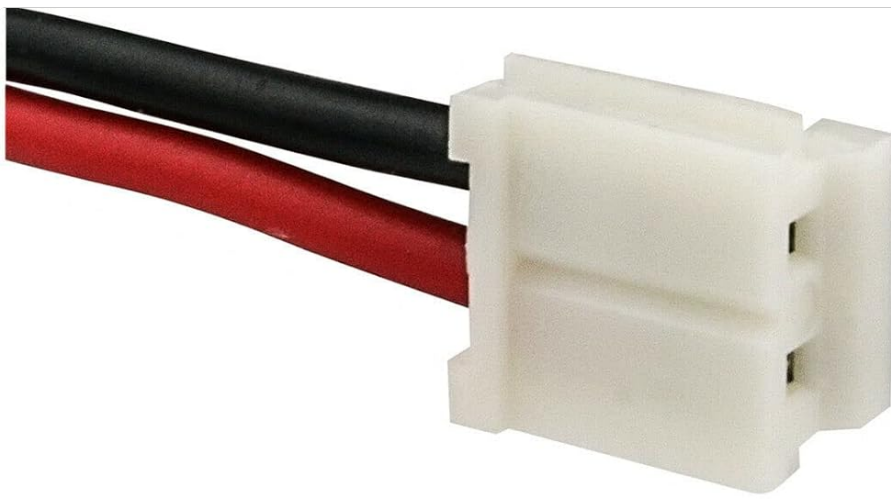

Kastar®
Convenience of Life



1. Please check your device connector.

2. Please note the location of the Red and Black cable.

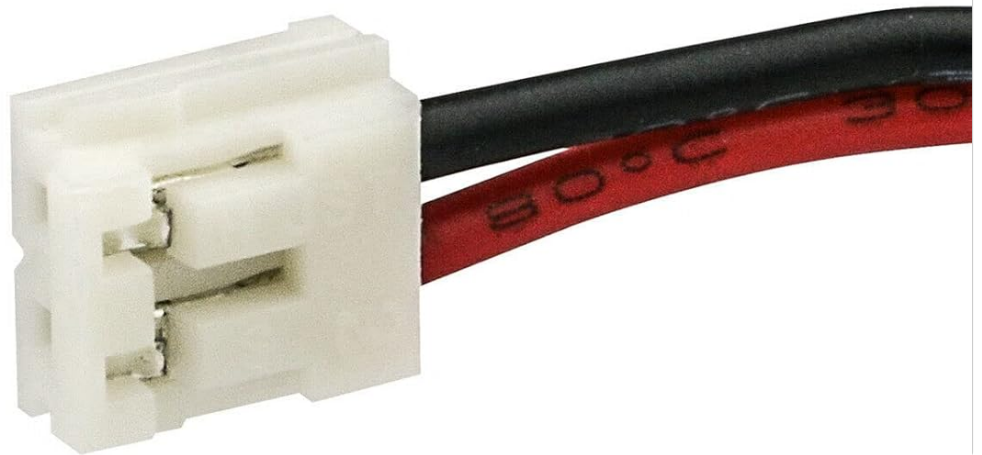


Image: A close-up view of the battery connector, highlighting the importance of checking the device's connector and noting the position of the red and black cables for correct installation.

Battery Size Verification

Confirm that the battery dimensions and model number match your device's requirements. This battery is specifically designed as a replacement for BT184342 / BT284342 and has dimensions of 44mm x 20mm x 10mm.

Specification:

Voltage: 2.4V

Capacity: 1000mAh

Battery Type: NiMH

Dimension:

44mm x 20mm x 10mm

1.73in x 0.79in x 0.39in



Caution: Please check the **Battery SIZE**
And the **CONNECTOR**

	BT184342/BT284342	✓
≠	BT183342/BT283342	✗
≠	BT183482/BT283482	✗

Image: The battery shown with its dimensions (44mm length, 20mm height) and a caution to check battery size and connector for compatibility with BT184342/BT284342 models, while indicating incompatibility with BT183342/BT283342 and BT183482/BT283482.

Installation Steps

1. Locate the battery compartment on your cordless phone or compatible device.
2. Open the battery compartment cover.
3. If replacing an old battery, carefully disconnect and remove it.
4. Connect the new Kastar battery to the device's connector, ensuring correct polarity.
5. Place the battery securely within the compartment.
6. Close the battery compartment cover.
7. Place the device on its charging base for the initial 16-hour charge.

OPERATING INSTRUCTIONS

Once installed and initially charged, your Kastar Ni-MH battery operates like the original battery in your device. For daily use:

- Always return your cordless phone handset to its charging base when not in use to maintain battery charge.
- Avoid completely draining the battery frequently, as this can reduce its overall lifespan.
- The battery is designed for up to 1200 charge/discharge cycles, providing extended use.

MAINTENANCE

- **Environmental Protection:** These Ni-MH cells are eco-friendly, free from harmful substances like Mercury (Hg), Cadmium (Cd), and Lead (Pb). Dispose of batteries responsibly according to local regulations.
- **Low Self-Discharge:** Kastar batteries are designed to hold their charge longer than standard batteries due to an embedded seal structure. This means they retain power even when not in active use.
- **Extended Lifespan:** With proper care, the batteries are protected from degradation during charging and discharging, extending their lifespan up to 1200 cycles.
- **Storage:** If storing the battery for an extended period, ensure it is partially charged (around 50%) and stored in a cool, dry place. Avoid extreme temperatures.
- **Cleaning:** Keep battery contacts clean and free of debris to ensure optimal connection.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Device does not power on after battery installation.	Battery not charged, incorrect installation, or faulty battery.	Ensure initial 16-hour charge. Recheck battery connection and polarity. Verify battery compatibility.
Battery does not hold charge for long.	Insufficient charging, aging battery, or device issue.	Ensure device is properly seated on charging base. If battery is old, it may be reaching end of life. Test with another compatible battery if possible.
Battery feels hot during charging or use.	Overcharging, faulty charger, or internal battery issue.	Disconnect immediately. Ensure charger is compatible and functioning correctly. Do not use if overheating persists.

SPECIFICATIONS

Battery Type: Ni-MH

Battery Voltage: 2.4V

Battery Capacity: 1000mAh

Battery Dimensions: 44 x 20 x 10mm (1.73" x 0.79" x 0.39")

Reusability: Rechargeable

Compatible Phone Models: CS6209 CS6219 CS62192 CS6219-2 CS62193 CS6219-3 CS62194 CS6219-4 CS6229 CS62292 CS6229-2 CS62293 CS6229-3 CS62294 CS6229-4 CS62295 CS6229-5 DS3101 DS31112 DS3111-2 DS6111 DS61112 DS6111-2 DS61113 DS6111-3 DS61114 DS6111-4 DS61152 DS6115-2 DS6121 DS61212 DS6121-2 DS61213 DS6121-3 DS61214 DS6121-4 DS61215 DS6121-5 DS61225 DS6122-5 DS6201 DS6211 DS62112 DS6211-2 DS62113 DS6211-3 DS62114 DS6211-4 DS6221 DS62212 DS6221-2 DS62213 DS6221-3 DS62214 DS6221-4

DS62215 DS6221-5 DS62224 DS6222-4 DS62225 DS6222-5 DS6301 DS6321 DS63213 DS6321-3 DS63214 DS6321-4 DS6322 DS63223 DS6322-3 DS63224 DS6322-4 EMBARQ eGO ip8300 ip-8300 ip831 ip-831 CPH-515D LS6110 LS6113 LS6117 LS6204 LS6205 LS62152 LS6215-2 LS6225 LS62252 LS6225-2 LS62253 LS6225-3 LS62254 LS6225-4 LS62255 LS6225-5 LS62262 LS6226-2 LS6245 VS61214 VS6121-4 VT6042 VT-6042 VT6043 VT-6043 VT6052 VT-6052 VT6053 VT-6053 Sanik 2SN-AAA55H-S-J1 2SN-AAA60H-S-J1 2SN-AAA65H-S-J1 2SN-AAA70H-S-J1 2SN-AAA70H-SX2F 2SNAAA55HSJ1 2SNAAA60HSJ1 2SNAAA65HSJ1 2SNAAA70HSJ1 2SNAAA70HSX2F GE 25210 2-5210 25250 2-5250 25423 2-5423 25424 2-5424 25425 2-5425 27902 2-7902 27902BE1 27902CE1 27903 2-7903 27903BE1 27903DE1 27903FE1 27909 2-7909 27909EE1 27911 2-7911 27911EE1 27950 2-7950 27950EE1 27951 2-7951 27951EE1 27955 2-7955 27956 2-7956 27956FE1 28107 2-8107 28127 2-8127 28127FE2 28203 2-8203 28213 2-8213 28213EE1 28213EE2 28223 2-8223 28223EE2 28801 2-8801 28802 2-8802 28802FE1 28811 2-8811 28811FE2 28821 2-8821 28821FE2 28821FE3 28821FJ3 28851 2-8851 28861 2-8861 28871 2-8871 28871FE2 28871FE3 28871FE3A 28871FE3-A 52734 5-2734 52814 5-2814 52826 5-2826 52840 5-2840 H5250 H-5250 H5401 H-5401 B8 B801 B802 B803 B804 K3 K301 K302 K303 K304 K305 L301 L302 L303 L304 L4 L401 L402 L402C L403 L403C L404 L404C P8 S801 S802 S803 S804 T31 T3101 T3151 SJB2121 SJB-2121 SJB2121/17 SJB-2121/17 SJB2121/37 SJB-2121/37

Model Number: MH-6B-BT8300-V

UPC: 605832418858

WARRANTY AND SUPPORT

For warranty information or technical support, please refer to the original purchase documentation or contact Kastar customer service through their official website or the retailer where the product was purchased. Keep your proof of purchase for any warranty claims.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B088F4CW6L>

More documents and user manuals: <https://manuals.plus/>