

[Manuals.plus](#) /

› [HALO](#) /

› HALO Bolt Compact Portable Car Battery Jump Starter User Manual

HALO 801104766

HALO Bolt Compact Portable Car Battery Jump Starter User Manual

MODEL: 801104766

Introduction

The HALO BOLT COMPACT is a powerful, compact, and easy-to-use device designed to safely jump start your car. Beyond jump-starting, it features 44,400 mWh of power to charge your phone, tablet, or other electronic devices via its two USB charging ports. Additionally, the HALO BOLT COMPACT includes a convenient LED floodlight for various situations.

Package Contents

- HALO BOLT COMPACT 44400
- AC Wall Charging Adapter
- Jumper Cables
- Car Charger
- USB to Micro USB Cable
- Carrying Pouch
- Quick Start Guide
- Operating Instructions



Image: HALO Bolt Compact with all included accessories neatly arranged.

Product Overview

The HALO Bolt Compact is designed with user convenience and safety in mind, offering multiple functionalities in a portable form factor.

- **Portable Car Jump Starter:** Capable of jump-starting full-sized cars and SUVs.
- **LED Flood Light:** Built-in bright LED floodlight for illumination, featuring emergency light modes.
- **Built-In Safety Features:** Includes reverse polarity protection, short circuitry protection, and auto power off. Jumper cables are designed with spark protection.
- **Additional USB Ports:** Two USB-A ports (5V/2.4A) for charging various electronic devices.
- **Easy to Use:** Features built-in safety checks and clear indicator lights for straightforward operation.



Image: The HALO Bolt Compact device, showcasing its sleek design.

Setup and Charging

Charging Your HALO Bolt Compact

Before initial use, fully charge your HALO Bolt Compact. Use the provided AC Wall Charging Adapter. Connect the adapter to the input port on the HALO Bolt Compact and plug it into a standard wall outlet. The digital display will show the charging progress.



Image: Detailed view of the HALO Bolt Compact's various ports and controls.

Operating Instructions

Jump Starting Your Vehicle

1. Ensure your HALO Bolt Compact is charged above 50%.
2. Attach the red jumper cable clamp to the positive (+) terminal of your vehicle's battery.
3. Attach the black jumper cable clamp to the negative (-) terminal of your vehicle's battery.
4. Plug the jumper cable connector into the jump start output on the HALO Bolt Compact.
5. Press the "Jump Start" button on the HALO Bolt Compact. Wait for a solid green light indicator on the jumper cable connector.

6. Start your vehicle.
7. Once the vehicle starts, immediately remove the jumper cables from the HALO Bolt Compact, then from the vehicle battery (negative first, then positive).



Easy to Use and Safe

Simple indicator lights and spark-proof jumper cables help keep you and your vehicle's battery safe.

Image: Connecting the HALO Bolt Compact to a car battery, highlighting its user-friendly design.

Charging Electronic Devices

Connect your device's USB charging cable to one of the two USB-A output ports (5V/2.4A) on the HALO Bolt Compact. Press the ON/OFF button to begin charging. The HALO Bolt Compact can charge various devices including phones, tablets, and other USB-powered electronics.

Using the LED Floodlight

Press and hold the ON/OFF button for a few seconds to activate the LED floodlight. Press the ON/OFF button again to cycle through different light modes, including a solid white light and a flashing red emergency signal. This feature is ideal for roadside emergencies or when extra illumination is needed.



LED Floodlight

Built-in, extra bright light.

Image: The HALO Bolt Compact's LED floodlight in use.

[Official Product Video: Jump Starting Demonstration](#)

Video: A demonstration of the HALO Bolt Compact Portable Car Battery Jump Starter in action, showing the connection process and successful jump start. Provided by ALLIANCE SPORTS GROUP.

Maintenance

Care and Storage

- Recharge the HALO Bolt Compact every 3 months to maintain optimal battery performance and longevity.
- Store the device in a cool, dry place away from direct sunlight and extreme temperatures.
- Keep the device clean and free from dust and debris.

Troubleshooting

Common Issues and Solutions

- **Device not turning on:** Ensure the HALO Bolt Compact's internal battery is sufficiently charged. Press and hold the power button for 2-3 seconds to activate the device.
- **Vehicle not jump starting:** Verify that the jumper cables are securely connected to the correct positive (+) and negative (-) battery terminals. Confirm the HALO Bolt Compact has at least 50% charge. Press the "Jump Start" button and wait for a solid green light on the jumper cable connector before attempting to start the vehicle.
- **Error indicator lights:** If the jumper cable connector displays an error light (e.g., red flashing), consult the Quick Start Guide or Operating Instructions for specific error code meanings and troubleshooting steps.

Specifications

Feature	Detail
Brand	HALO
Model Number	801104766
Product Dimensions	3.3"D x 6.1"W x 1.4"H
Item Weight	1.14 pounds
Amperage	3700 Amps
Peak Output Current	3700 Amps
Battery Cell Composition	Lithium Polymer
Battery Capacity	3700 Milliamp Hours
USB-A Output	2 x 5V/2.4A
Vehicle Service Type	Passenger Car
Color	SILVER GRAPHITE

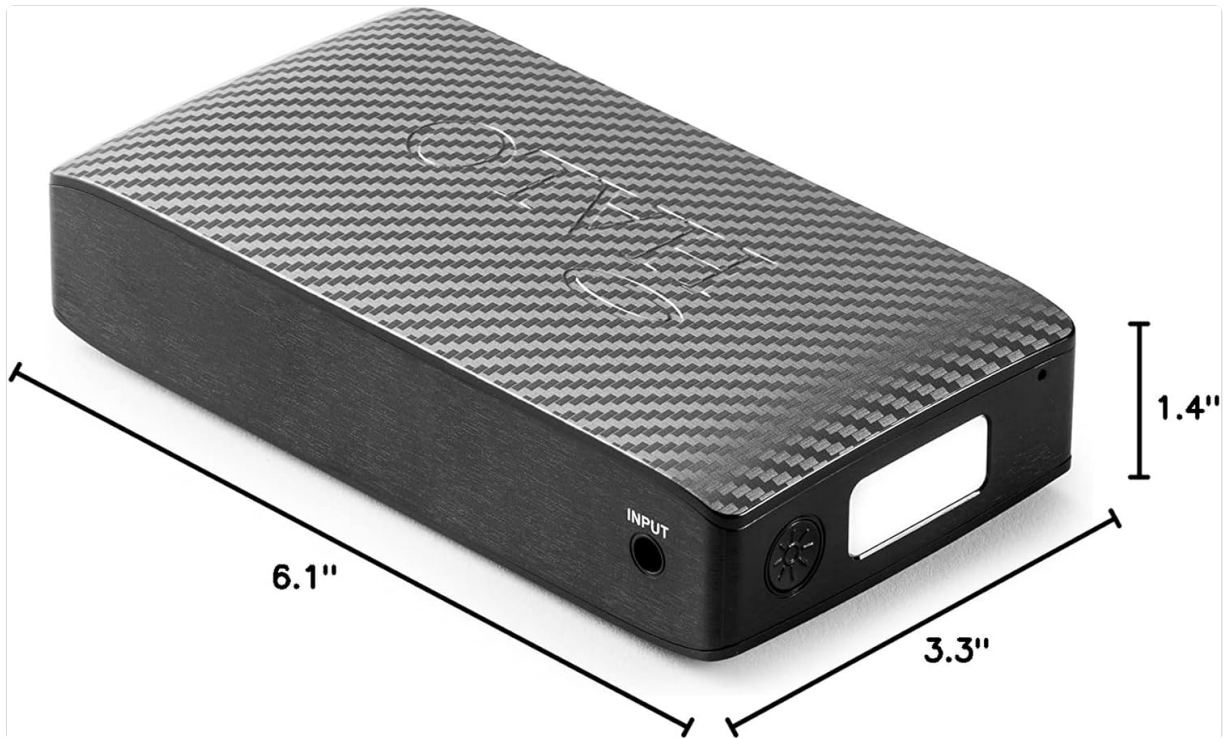


Image: Dimensions of the HALO Bolt Compact.

Warranty and Support

For detailed warranty information, product registration, or customer support, please visit the official HALO website or contact their customer service department. Keep your purchase receipt for warranty claims.