

[Manuals.plus](#) /

› [DUMEE](#) /

› DUMEE Twin Bed Frame with Headboard and Footboard, Textured White - Instruction Manual

DUMEE 634

DUMEE Twin Bed Frame Instruction Manual

Model: 634, Textured White

IMPORTANT SAFETY INFORMATION

Please read and understand all instructions before assembly and use. Failure to follow these instructions may result in injury or product damage.

- Always follow assembly instructions carefully to prevent instability.
- Be cautious of sharp edges when handling metal frame components.
- Do not exceed the maximum weight limit of **226.8 kg (500 lbs)**.
- Ensure all bolts are securely tightened before use. Periodically check and re-tighten all connections.
- Keep small parts away from children during assembly.

PACKAGE CONTENTS

Verify that all components are present before beginning assembly. If any parts are missing or damaged, please contact DUMEE customer support.

- Headboard and Footboard sections
- Side Rails
- Steel Slats
- Support Legs
- Hardware Pack (bolts, washers, nuts, Allen wrench)
- Assembly Instructions Manual

SETUP AND ASSEMBLY

Assembly typically requires two people and approximately 1-2 hours. Follow the numbered steps provided in the included instruction leaflet. Ensure all parts are correctly oriented before tightening.

1. **Unpack and Identify Parts:** Lay out all components on a clean, soft surface to prevent scratches. Match each part to the corresponding label in the instruction manual.
2. **Initial Assembly:** Begin by attaching the side rails to the headboard and footboard. Insert bolts loosely at this stage.
3. **Install Support Legs:** Attach any central support legs to the frame. Ensure they are aligned vertically.
4. **Place Slats:** Position the steel slats across the frame. Secure them according to the instructions.
5. **Final Tightening:** Once all parts are assembled and aligned, systematically tighten all bolts using the provided Allen wrench. Do not overtighten.

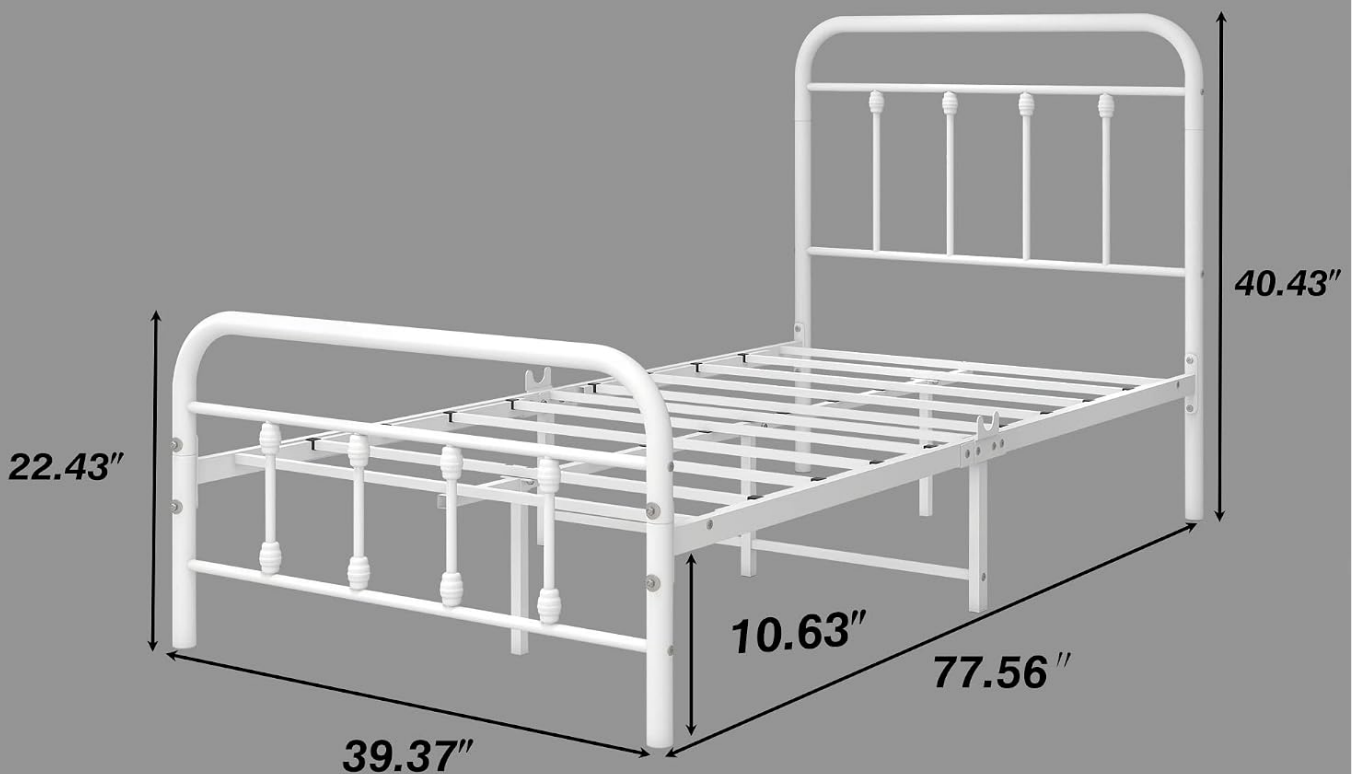


Figure 1: DUMEE Twin Bed Frame Dimensions. Width: 39.37 inches, Length: 77.56 inches, Headboard Height: 40.43 inches, Footboard

Height: 22.43 inches, Under-bed Clearance: 10.63 inches.



Figure 2: Fully assembled DUMEE Twin Bed Frame in a bedroom.

OPERATING INSTRUCTIONS

The DUMEE Twin Bed Frame is designed to support a twin-sized mattress directly on its steel slats, eliminating the need for a box spring.

- **Mattress Placement:** Place your twin-sized mattress directly onto the steel slat support system. Ensure the mattress is centered and fully supported.
- **Weight Capacity:** The bed frame has a maximum weight recommendation of 226.8 kg (500 lbs), including the mattress and occupants. Do not exceed this limit.
- **Under-bed Storage:** The frame provides approximately 10.63 inches of clearance for under-bed storage. Utilize this

space for storage boxes or other items to maximize room efficiency.



Figure 3: Under-bed storage space with baskets, demonstrating practical use.

MAINTENANCE

Regular maintenance ensures the longevity and stability of your bed frame.

- **Cleaning:** Wipe the metal frame with a dry cloth to remove dust and debris. Avoid abrasive cleaners or harsh chemicals that may damage the powder-coated finish.
- **Bolt Tightness:** Periodically (e.g., every 3-6 months) check all assembly bolts and re-tighten them as necessary. Loose bolts can lead to instability and noise.
- **Anti-Noise Plugs:** The frame is designed with anti-noise plastic plugs. Ensure these remain securely in place to minimize squeaking.



Figure 4: Detail of the anti-noise plastic plug design, which helps prevent squeaking.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Bed frame is squeaking	Loose bolts; metal-on-metal friction; missing anti-noise plugs.	Re-tighten all bolts. Ensure anti-noise plastic plugs are correctly installed.
Parts do not align during assembly	Incorrect part orientation; bolts tightened too early.	Loosen all bolts, re-check part labels and orientation, then reassemble. Ensure bolts are only finger-tight until final step.

Problem	Possible Cause	Solution
Missing or damaged parts	Packaging error; shipping damage.	Do not proceed with assembly. Contact DUMEE customer support immediately for replacement parts.
Frame feels unstable	Loose connections; improper assembly.	Ensure all bolts are fully tightened. Verify that all components are assembled according to the instructions.

SPECIFICATIONS

Feature	Detail
Model Number	634
Size	Twin
Material	Metal Steel
Color	Textured White
Finish Type	Powder Coated
Style	Vintage
Product Dimensions (Approx.)	Width: 39.37 inches, Length: 77.56 inches, Headboard Height: 40.43 inches, Footboard Height: 22.43 inches
Under-bed Clearance	10.63 inches
Maximum Weight Recommendation	226.8 kg (500 lbs)
Special Feature	Squeak Resistant, No Box Spring Needed
Included Components	Slat

WARRANTY AND SUPPORT

DUMEE provides a **12-month warranty** for this product from the date of purchase. This warranty covers manufacturing defects under normal use.

For any questions regarding product assembly, missing parts, or warranty claims, please contact DUMEE customer service. Refer to your purchase documentation or the DUMEE official website for the most current contact information.

Manufacturer Contact Information: shenzhen, guangdong 518110, CN

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question