Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

HuskyTool CL1500HD

Husky 1500-Lumens Rechargeable Clamp LED Work Light User Manual

Model: CL1500HD

Introduction

This manual provides essential information for the safe and effective operation, maintenance, and care of your Husky 1500-Lumens Rechargeable Clamp LED Work Light. Please read these instructions thoroughly before first use and retain for future reference.


Safety Information

- **Eye Protection:** Always wear appropriate eye protection when operating work lights to prevent eye injury from intense light.
- **Heat:** The LED light head may become warm during extended use. Avoid direct contact with the light head when in operation.
- **Water Exposure:** This work light is not waterproof. Avoid exposure to rain or wet conditions to prevent electrical shock or damage.
- **Children and Pets:** Keep the work light out of reach of children and pets. Exercise caution when operating the clamp mechanism to prevent accidental pinching or injury.
- **Charging:** Use only the provided or recommended USB charging cable. Do not attempt to charge the unit with damaged cables or in wet environments.
- **Modifications:** Do not attempt to disassemble, modify, or repair the work light. This may void the warranty and pose safety risks.

Product Features



Back Panel Overview: Features include the lock/unlock mechanism for freestanding legs, charge indicator lights, and a USB charging port for convenience.

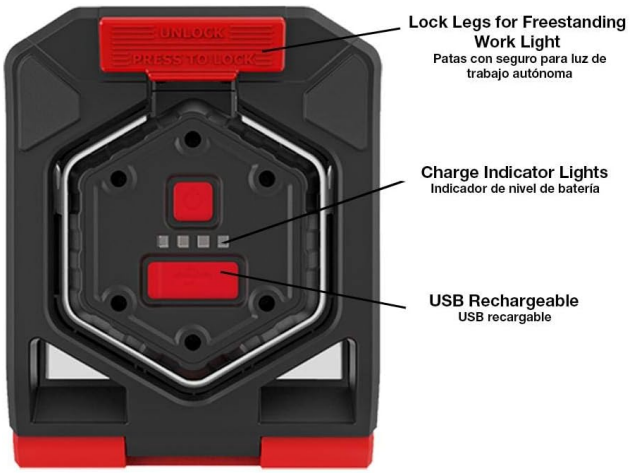

Hanging Functionality: The integrated clamp allows the work light to be securely hung from various objects like pipes or rods.



Secure Clamping: The robust clamp mechanism securely attaches to pipes, doors, wood framing, and other surfaces for hands-free illumination.



360° Pivoting Direction: The light head can be rotated 360 degrees, allowing precise direction of light to your work area.



Dual Brightness Modes: Provides 1500 lumens on high setting and 750 lumens on low setting for versatile illumination needs.



Durable Construction & Performance: Made from heavy ABS thermoplastic, provides 6281K daylight, and offers a runtime of 3 hours on high or 6 hours on low.



Freestanding Capability: The integrated legs can be locked into position to allow the work light to stand independently on flat surfaces.

Setup and Charging

Initial Charge

Before first use, fully charge the work light. Connect the provided USB charging cable to the USB port on the back of the light and to a compatible USB power source (e.g., wall adapter, computer USB port). The charge indicator lights will illuminate to show charging status.

Charging Indicators

- The charge indicator lights on the back of the unit will show the battery level during charging and operation.
- Charging may take several hours for a full charge. It is recommended to charge overnight for optimal performance.

Operation

Turning On/Off and Brightness Adjustment

1. Press the power button once to turn the light on at the high setting (1500 lumens).
2. Press the power button a second time to switch to the low setting (750 lumens).
3. Press the power button a third time to turn the light off.

Using the Clamp

- To open the clamp, firmly squeeze the handles together.
- Position the clamp jaws around the desired object (e.g., pipe, door frame, ladder rung).
- Release the handles to allow the clamp to securely grip the surface. Ensure the light is stable before releasing.

Freestanding Operation

- To deploy the freestanding legs, locate the red 'UNLOCK' tab on the back panel.
- Slide the tab to the 'UNLOCK' position.
- Extend the legs outwards until they click into place.
- Slide the tab to the 'PRESS TO LOCK' position to secure the legs.
- Place the work light on a stable, flat surface.

Adjusting Light Direction

The light head can be manually rotated 360 degrees on its axis. Gently pivot the light head to direct illumination precisely where needed.

Maintenance

- **Cleaning:** Wipe the work light with a soft, damp cloth. Do not use abrasive cleaners or solvents. Ensure the light is off and unplugged before cleaning.
- **Storage:** Store the work light in a cool, dry place away from direct sunlight and extreme temperatures. If storing for extended periods, ensure the battery is partially charged (around 50%) to prolong battery life.
- **Battery Care:** Recharge the battery periodically if the light is not used for a long time to maintain battery health.

Troubleshooting

- **Light does not turn on:** Ensure the battery is charged. Connect the light to a USB power source and check if the charge indicator lights illuminate.
- **Light is dim:** The battery may be low. Recharge the unit.
- **Charging is slow:** Charging time can vary depending on the power source and battery depletion level. Ensure the USB cable is fully inserted and the power source is adequate.
- **Clamp not holding securely:** Ensure the surface is within the clamp's capacity and is not excessively smooth or oily.

Specifications

Model Number	CL1500HD
Light Output (High)	1500 Lumens
Light Output (Low)	750 Lumens
Runtime (High)	3 Hours

Runtime (Low)	6 Hours
Light Source Type	LED
Color Temperature	6281 K Daylight
Power Source	Rechargeable Battery (USB)
Material	Heavy ABS Thermoplastic, Plastic
Mounting Type	Clamp Mount, Freestanding
Pivoting Angle	360°
Dimensions	7 x 6 x 5 inches
Item Weight	1.52 pounds (0.69 kg)
Wattage	21 watts
UPC	853865008021

Warranty and Support

For warranty information or technical support, please refer to the documentation included with your purchase or contact HuskyTool customer service directly. Keep your proof of purchase for warranty claims.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B08B12GQPF

More documents and user manuals: **https://manuals.plus/**