

此页不印刷（本文件共24页）

SIZE:140mm X 200mm

材质: 封面250g铜版纸 内页: 书纸


工艺: 封面过亚膜



PANTONE Black C

注意：不要随便删减空白页（特别是封面内页不能出现印刷内容）

Battery Camera Kits

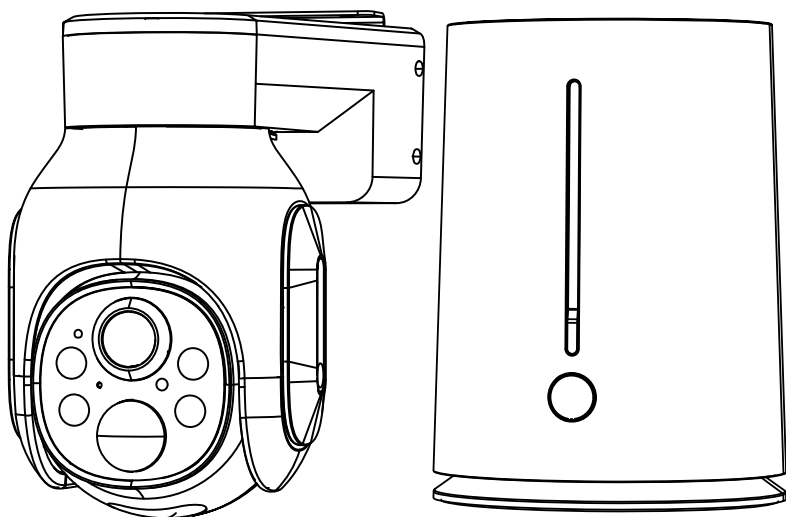

User Manual

Menu

Product Overview	1
Add the Camera Kits In the APP	7
1.Download the APP	7
2.Register	8
3.Power On the Camera and the Base Station	8
4.Connect the Base Station to local Network	9
5.Add the Base Station in the APP	10
6.Add a new Camera to the Base Station	11
APP Interface	13
1.Main Interface	13
2.Camera Control Interface	13
3.Recording Playback Interface	14
FAQs	15

If you have any questions or problems



Please contact us by

SC@yooomail.com

We will offer prompt and authoritative reply within 24 hours and try our best to resolve your problem ASAP.


Product Overview

Camera:

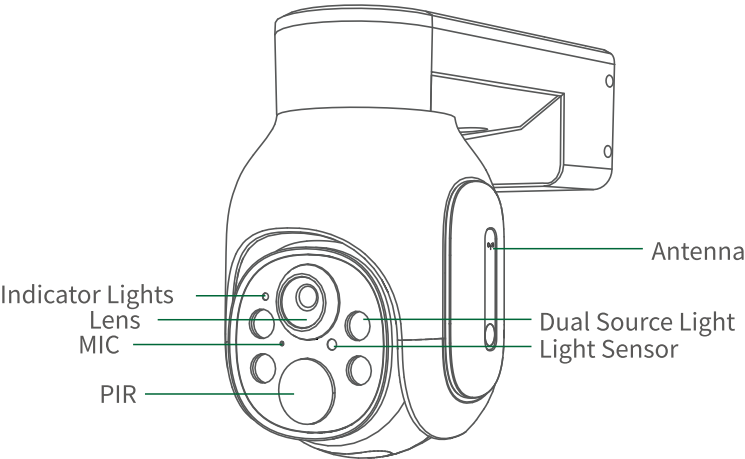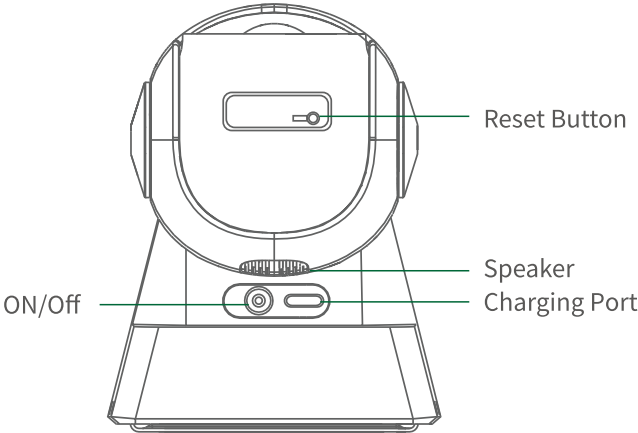


Reset Button	Press and hold for 5 seconds to restore factory settings
Speaker	Used to play system prompts and implement two-way audio
On/Off	Power button
Charging Port	Support Type-C port adapter and solar panel charging
Indicator Lights	<p>green light + red light stays on: the camera is being remotely previewed</p> <p>green light stays on: device is connected or woken up</p> <p>green light flashing : charging</p> <p>red light stays on :low battery</p> <p>red and green lights always off: standby mode</p>
Lens	Record pictures and videos
Mic	For capturing environmental sound and implement two-way audio
PIR	Triggers recording and alarms when the human moves in front of the device
Antenna	Receive signal
Dual Source Light	Emits infrared and white light
Light Sensor	Collect ambient brightness value, will on when the illumination is lower than 2LUX

Base Station:

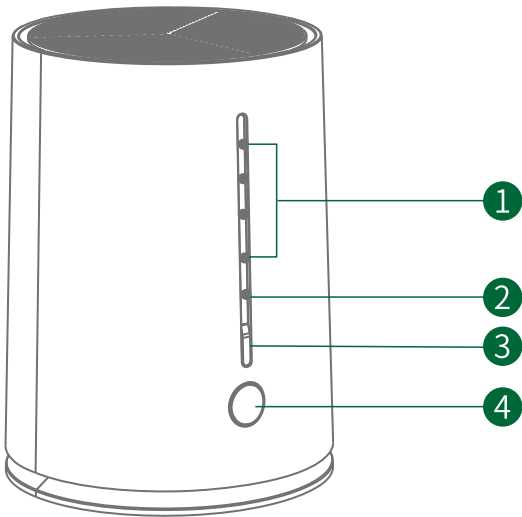


- 1. IPC Indicator
- 2. Net Indicator
- 3. Reset
- 4. Sync

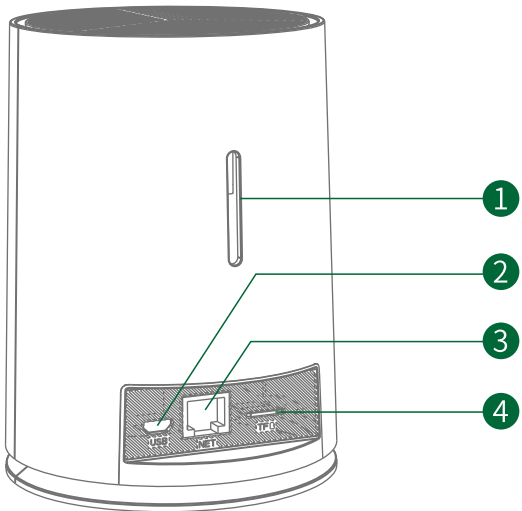

- 1. Speaker
- 2. DC5V USB Port
- 3. Net
- 4. Micro SD Port


Net	Connect the base station to the Internet
Reset	Long press 5 seconds to simple reset (not clear the camera channel), continue to press and hold for more than 10 seconds to all reset (use with caution)
Micro SD Port	Micro SD card interface, supports up to 128G
Sync	Code matching button, long press for 3 seconds to enter the code matching state
Net Indicator	Always on: The network connection is smooth, the device ID is online and can be viewed remotely. Slow flashing: Network connection error Fast flashing: Network connection is not connected
IPC Indicator	Always on: The camera is connected to the base station normally Slow flashing: Abnormal connection between camera and base station Fast flashing: The base station has entered the code matching mode No light: Camera is not added
DC5V USB Port	DC power input 5V

Installation :

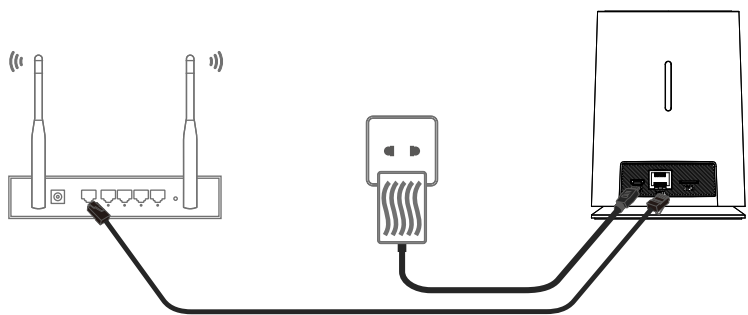

Notice:

The Base Station needs to be powered with the included power adapter constantly.

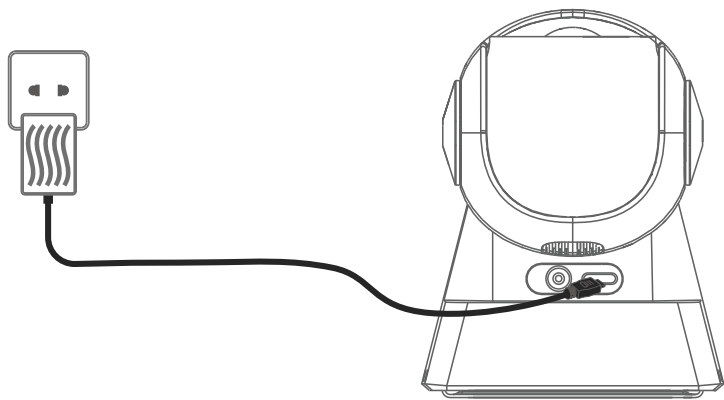

Please charge the Battery Camera with the included power adapter for at least 5 hours.

Notice:

To ensure the system's best performance and normal function, please pay attention to the following content:

1. Do not install the camera near a heat source.
2. Please make sure there is no reflecting object within 5 feet(1.5meters)range in front of the PIR sensor, otherwise the PIR might be interfered.
3. Try to avoid installing the camera on the busy roadside, frequent pedestrians and vehicles will wake up the camera frequently, resulting in frequent alarm messages and extremely fast power consumption.
4. Do not install the camera too far from the base station. The product needs to maintain good signal strength with the base station to work properly.
5. When the camera is connected to the base station, the card slot on the camera will be disabled and all videos will be recorded on the memory card on the base station.

Add the Camera Kits In the APP

1.Download the APP

Scan the corresponding QR code for your phone, or search “CloudEye” in App Store or Google Play Store to get download and install the APP.



IOS



Android

NOTICE:

To ensure the APP's normal function, please allow the Notification/Location permission on your smartphone.


2.Register

Launch the APP CloudEye, and register with your Email address.

Notice:

Please use a available Email address.

Choose the right country code.

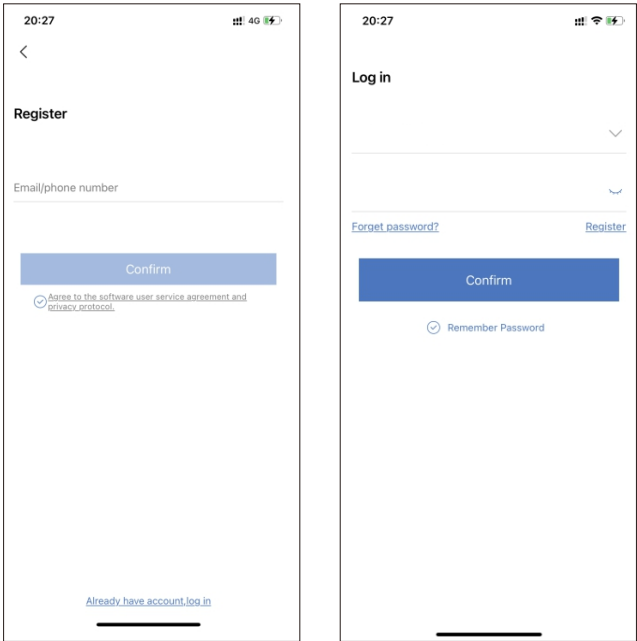

3.Power On the Camera and the Base Station


Power on the camera, and power the Base Station with the included power adapter, the Base Station will power on automatically.

NOTICE:

Please charge the camera with the included power adapter for 5 hours before using for the first time.

4.Connect the Base Station to local Network

Power on the Base Station and connect the Base Station to your router with the included Ethernet cable.


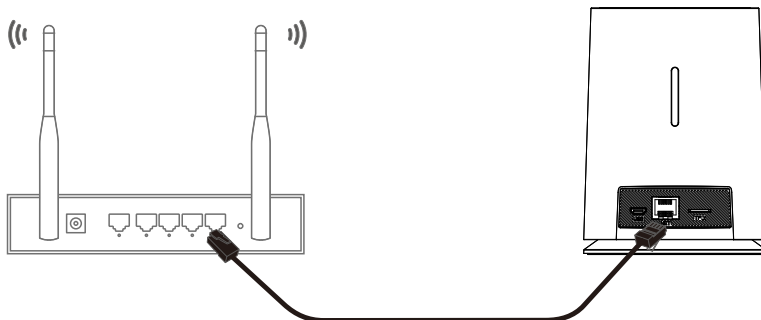


Notice:

Please make sure your router is using DHCP (Dynamic Host Configuration Protocol) for internet configuration, The Base Station only support DHCP. If your router is using static IP address, please visit our official website : <https://www.toguard.cc> and download the manual document for adjusting static IP address.

5.Add the Base Station in the APP

Make sure the Base Station is properly connected to the router, then launch the CloudEye APP, Click the “+” icon to add devices. Scan the QR code on the Base Station to add the devices,

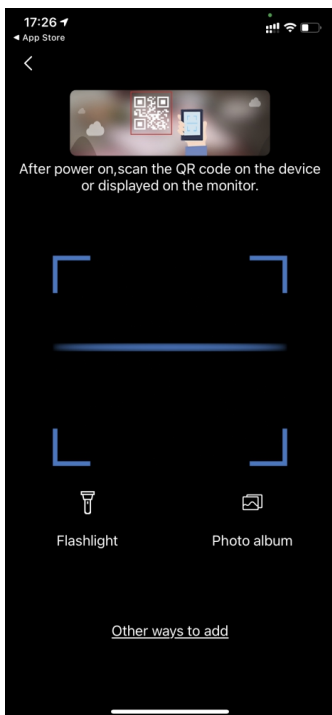


Warm Tip:The base station and camera of this system have been programmed before shipped. You only need to complete the above steps and scan the QR code of the base station to add the device to view the camera screen. If you need to add a new camera or re-add a camera, please see the operation method below.

6.Add a New Camera to the Base Station


The Base station can connect up to 4 cameras, please follow these steps to add a new camera to the Base Station.

(If you want to reset the original camera in the kits, please follow these steps to add the camera again)

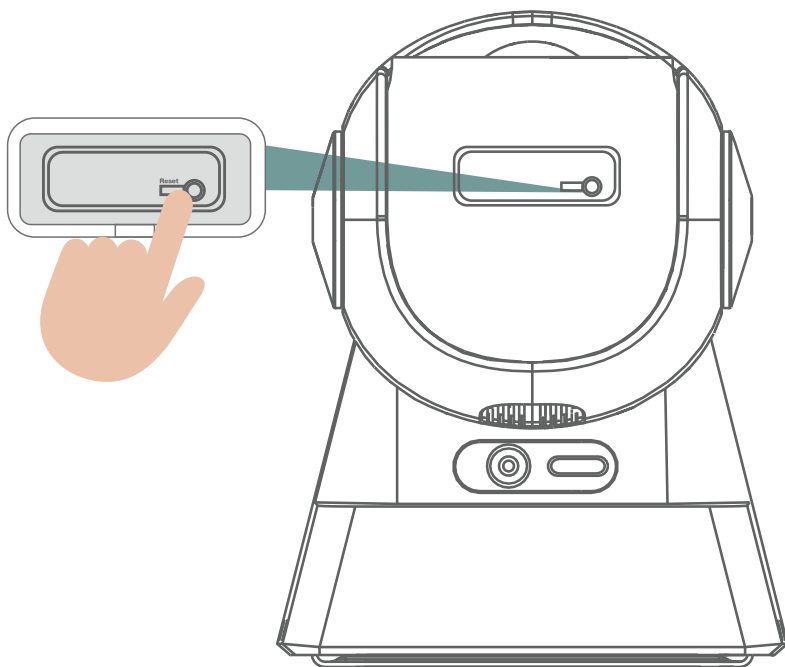

1. Press and hold "Reset" for more than five seconds to Reset the device;

2. Press and hold the “Sync” button on the Base Station for 5 seconds to start matching code. The Base Station prompt ”Matching code will be done once you heard the voice prompt”

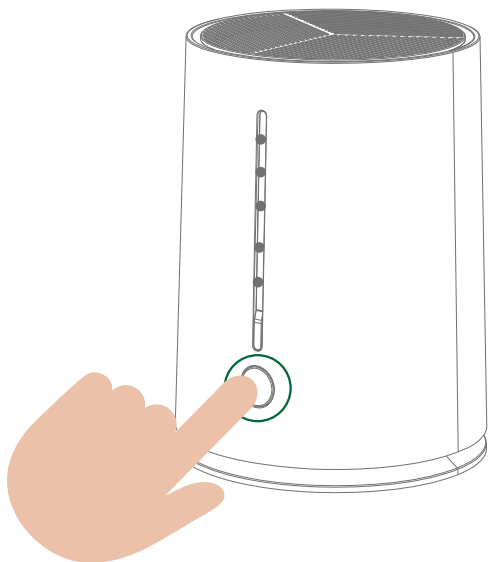

3. Within 1 minutes, the Camera prompt “Matching Code Succeed” and the Base Station prompt “WiFi Matching Succeed”

4. The camera is successfully added to the Base Station, you can change the configuration in the CloudEye APP.


Notice:

If the Base Station The new device is not found, Try again.

4.APP Interface

1.Main Interface

- 1.Add device
- 2.Device name
- 3.Edit device
- 4.Device ID
- 5.Play button
- 6.Cloud service
- 7.Alarm notification
- 8.Share device
- 9.Playback

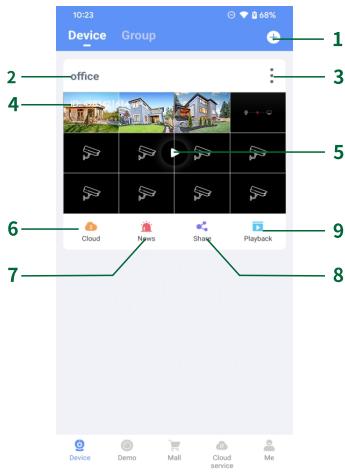


2.Camera Control Interface

- 1.Return
- 2.Edit camera
- 3.Preview (SD/HD)
- 4.Set the split screen
- 5.ON/OFF the camera microphone
- 6.PTZ Control(Camerasupport required)
- 7.Screenshot
- 8.Recording
- 9.Full screen preview
- 10.Voice intercom
- 11.More Settings



3.Recording Playback Interface

- 1.Cloud playback (requires activation)
- 2.Local playback
- 3.Playback speed (Cloud playback only)
- 4.Download the video
- 5.Turn on/off sound
- 6.Playback screenshots
- 7.Recording playback
- 8.Playback time selection
- 9.Full screen preview
- 10.Channel Switch
- 11.Playback timeline

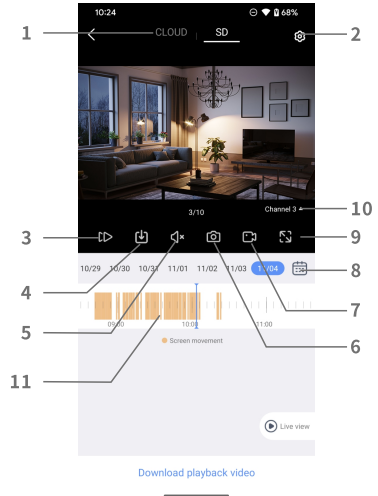

Note:

Some functions in the APP need camera attribute support, different forms of cameras added into this APP may have slight differences in the operating interface. If you have any questions, please contact SC@yoomail.com

FAQs

1. If the phone receives alarm messages too frequently, the camera will consume battery power greatly. It is recommended to lower the motion detection sensitivity, set the alarm interval, and start the alarm plan.
2. If you find that there are no moving objects in the alarm picture that the phone frequently receives, it may be that there is a sensitive heat source in the motion detection range, which causes the PIR to be triggered by mistake. It is recommended to lower the motion detection sensitivity.
3. If you detect that someone is passing by the camera but cannot receive the alarm message, it is recommended to increase the motion detection sensitivity.
4. If you find that the alarm picture or video is delayed, or you can only see the back of people, it is recommended to increase the motion detection sensitivity.
5. The PIR sensor will be disturbed by the ambient temperature. It is recommended to increase the motion detection sensitivity in a hot environment, and decrease the motion detection sensitivity in a cold environment. At the same time, when the temperature is extremely low, heavy clothes will hinder PIR sensor detection.
6. The ultraviolet rays of the sun will interfere with the PIR sensor. When the PIR of the camera is directly facing the strong sun, there is a probability that the alarm will not be sensitive.

The device prompts offline?

- 1) Check whether the equipment is in the power-on state, and observe whether the working light of the equipment is on normally.
- 2) Check whether the WIFI network is in good condition and restart the router.
- 3) If the device is located far away from the router, which results in the inability to obtain a good WIFI signal, it is recommended to move the router to a closer place or add a WIFI amplifier to improve the WIFI performance of the home.
- 4) Delete the floodlight camera from your CloudEye account and add it again after resetting the device.
- 5) Check whether the device firmware and application program are the latest version.

Update router or WIFI password?

Delete the camera from your CloudEye account. After resetting the device, use the new WIFI or password to add it again.

Alarm push frequently?

1. In the app, lower the sensitivity of the motion detection alarm.
2. Check whether there are objects that interfere with and trigger the PIR sensor in the field of view of the equipment, such as the outdoor unit of the air conditioner, driving cars, passing pedestrians, etc. The angle of the device can be adjusted appropriately to avoid these easily disturbing objects

The phone cannot receive the alarm push?

1. Set in the mobile phone system and enable the push permission of the "CloudEye" application.
2. Make sure the device's motion detection function is successfully turned on.
3. Restart the phone, and the Android phone tries to clear the cache.
4. Check whether the network is good.

