Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

YONGJIANGXIA TWH950ISO

ISO Wire Harness for Toyota Factory Audio Stereo

Brand: YONGJIANGXIA | Model: TWH950ISO

1. Product Overview

The YONGJIANGXIA ISO Wire Harness (Model TWH950ISO) is designed to facilitate the installation of an aftermarket car stereo into compatible Toyota vehicles without the need to cut or modify the factory wiring harness. This adapter provides a seamless plug-and-play connection, preserving the integrity of your vehicle's original electrical system.

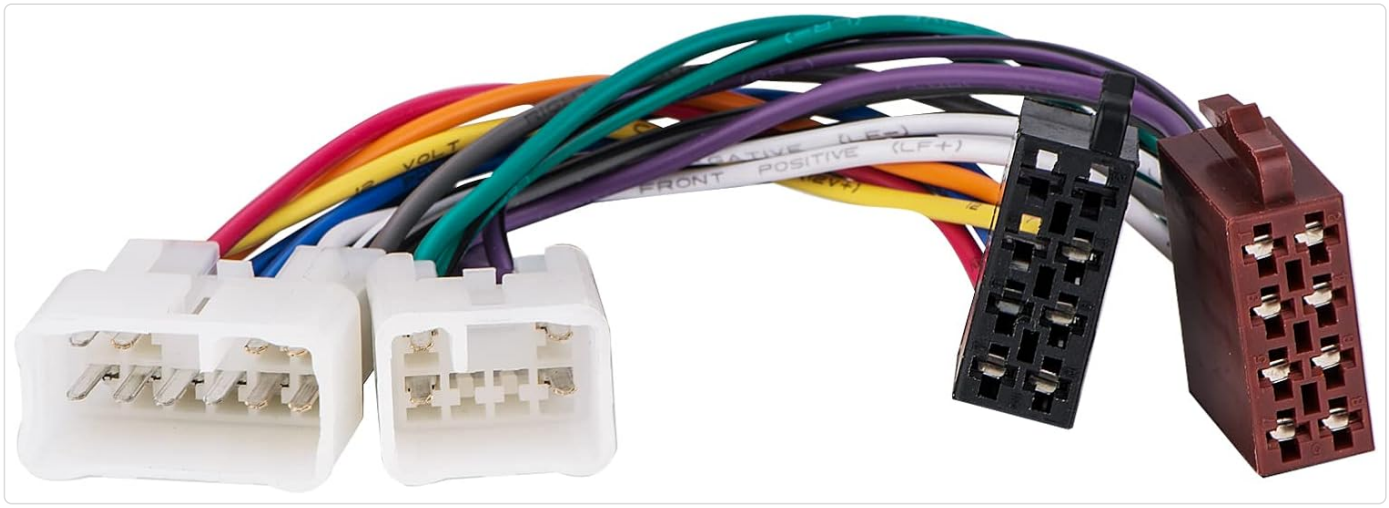


Image 1: Overview of the ISO Wire Harness, showing its various colored wires and connectors.

2. Compatibility

This wire harness is compatible with a wide range of Toyota vehicles. Please verify your vehicle's make, model, and year against the list below to ensure proper fitment:

- **Toyota 4-Runner:** 1987 - 2005
- **Toyota Avalon:** 1995 - 1999
- **Toyota Camry:** 1987 - 2005
- **Toyota Celica:** 1987 - 2004
- **Toyota Corolla:** 1987 - 2005
- **Toyota Cressida:** 1988 - 1993
- **Toyota Echo:** 2000 - 2002

- **Toyota Highlander:** 2001 - 2004
- **Toyota Landcruiser:** 1987 - 1996
- **Toyota MR2:** 1987 - 2002
- **Toyota Prius:** 2004 - 2005
- **Toyota RAV4:** 1996 - 2004
- **Toyota Sequoia:** 2001 - 2004
- **Toyota Sienna:** 1996 - 2004
- **Toyota Tacoma:** 1995 - 2005
- **Toyota Tundra:** 1999 - 2004

3. Installation Guide

Before beginning installation, ensure your vehicle's battery is disconnected to prevent electrical shorts or damage. Consult your aftermarket stereo's manual for specific wiring diagrams if needed.

Required Tools:

- Wire strippers/crimpers (if connecting to aftermarket stereo wires)
- Electrical tape or heat shrink tubing
- Screwdriver set (for removing vehicle trim/stereo)

Installation Steps:

1. **Prepare Vehicle:** Carefully remove the factory stereo from your Toyota vehicle. This typically involves removing trim panels and unscrewing the stereo unit. Refer to your vehicle's service manual for precise instructions.
2. **Disconnect Factory Harness:** Locate the factory wiring harness connected to the back of your original stereo. Gently unplug this harness.
3. **Connect to Aftermarket Stereo:** The YONGJIANGXIA ISO Wire Harness has two sets of connectors. One set is designed to plug into your vehicle's factory wiring, and the other set connects to your new aftermarket stereo. Match the wires from the ISO harness to the corresponding wires on your aftermarket stereo's harness (e.g., power, ground, speaker wires). Use wire crimps or solder and insulate connections with electrical tape or heat shrink tubing.

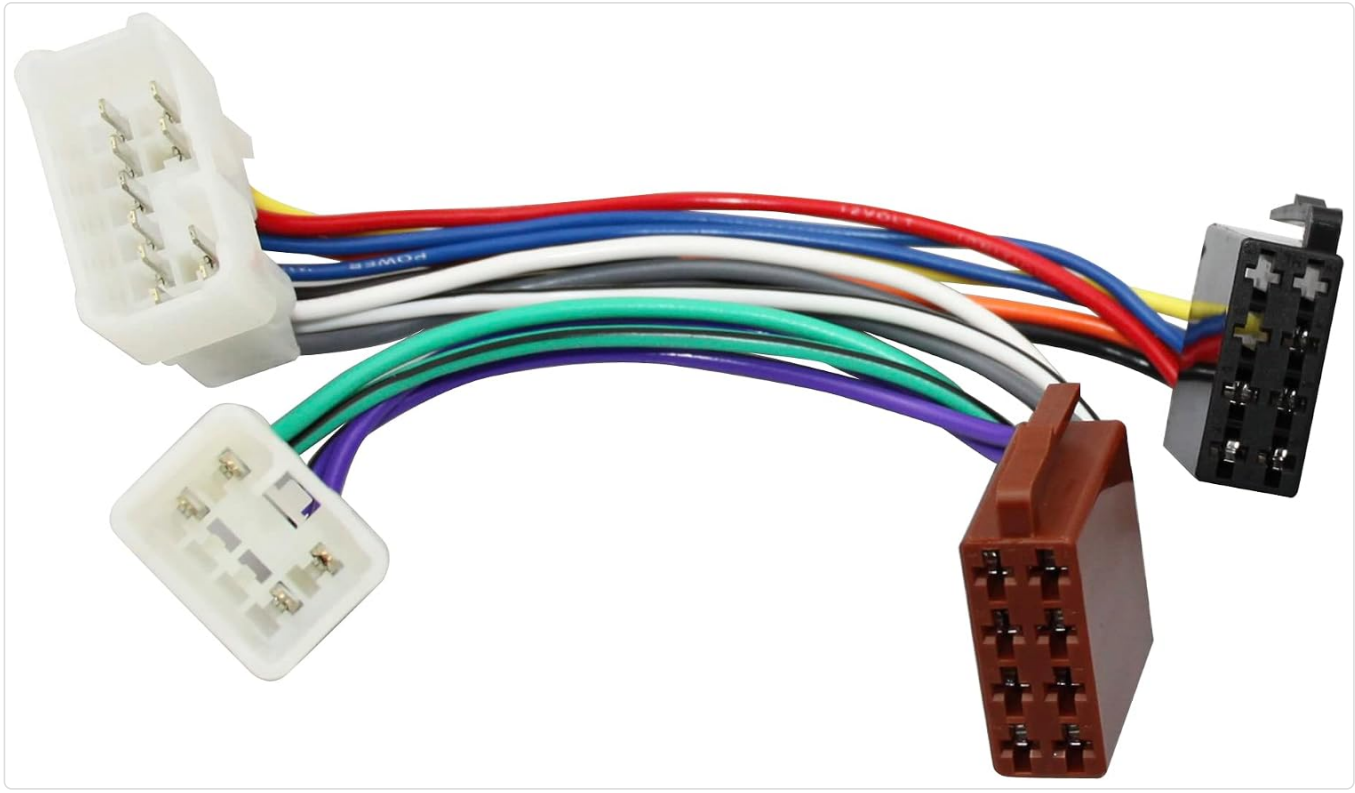


Image 2: The white connectors of the harness, designed to interface with the vehicle's factory wiring.



Image 3: The black and brown connectors of the harness, which connect to the aftermarket stereo's wiring.

4. **Connect ISO Harness to Vehicle:** Plug the white connectors of the YONGJIANGXIA ISO Wire Harness into the

factory wiring harness you disconnected from your original stereo. Ensure a secure and snug fit.

5. **Connect Aftermarket Stereo:** Plug the prepared aftermarket stereo harness (now connected to the ISO harness) into the back of your new aftermarket stereo.



Image 4: The complete harness assembly, ready for connection between the vehicle and the new stereo.

6. **Test Functionality:** Before reassembling your dashboard, reconnect the vehicle's battery and test the aftermarket stereo's functionality (power, audio, balance, fade, etc.).
7. **Reassemble:** Once confirmed working, carefully reassemble your vehicle's dashboard and secure the new stereo in place.

4. Specifications

Feature	Detail
Brand	YONGJIANGXIA
Model Number	TWH950ISO
Material	Acrylonitrile Butadiene Styrene
Cable Type	Auxiliary

Feature	Detail
Connector Type	3.5mm Jack, RCA (Internal wiring for ISO standard)
Item Weight	1.76 ounces
UPC	717351680507

5. Troubleshooting

- **No Power to Stereo:**
  - Check vehicle's fuse box for blown fuses.
  - Ensure all harness connections are secure and fully seated.
  - Verify the aftermarket stereo's power and ground wires are correctly connected to the ISO harness.
- **No Sound:**
  - Confirm speaker wires are correctly matched and connected from the ISO harness to the aftermarket stereo.
  - Check stereo settings (e.g., mute, volume level, fader/balance).
- **Intermittent Operation:**
  - Inspect all connections for looseness or poor contact.
  - Ensure no wires are pinched or damaged during reassembly.

6. Maintenance

The YONGJIANGXIA ISO Wire Harness is a passive component and requires no routine maintenance. Once installed correctly, it is designed for long-term, reliable operation. Avoid exposing the harness to excessive moisture, heat, or physical stress.

7. Warranty and Support

For warranty information or technical support regarding your YONGJIANGXIA ISO Wire Harness, please contact the seller or manufacturer directly. Keep your purchase receipt as proof of purchase.

© 2023 YONGJIANGXIA. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B08B7RXS3J

More documents and user manuals: **https://manuals.plus/**