

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

> [ARKSEN](#) /

> [ARKSEN 84 x 50 x 6 Inch Universal Extra Wide 150LB Heavy Duty Roof Rack Cargo Basket User Manual](#)

### ARKSEN 005-TH-RRW84

# ARKSEN 84 x 50 x 6 Inch Universal Extra Wide 150LB Heavy Duty Roof Rack Cargo Basket User Manual

Brand: ARKSEN | Model: 005-TH-RRW84

## PRODUCT OVERVIEW

The ARKSEN 84 x 50 x 6 Inch Universal Roof Rack Cargo Basket is designed to provide additional storage capacity for your vehicle, allowing you to transport gear, luggage, and other items safely and efficiently. Its heavy-duty steel construction ensures durability and resistance to various weather conditions.

Key features include:

- **Large Storage Capacity:** Can hold up to 150 lbs of cargo. Dimensions: 84" (L) x 50" (W) x 6" (H).
- **Rigid Construction:** Made from heavy-duty steel with a black powder coating for corrosion resistance.
- **Extra Security:** Features bottom metal bars and side rails to secure items, plus a steel wind fairing to reduce wind resistance and protect cargo.
- **Easy Installation:** Designed for easy mounting on most vehicles with existing crossbars using universal U-bolts.
- **Versatile Use:** Ideal for camping supplies, firewood, luggage, hunting and fishing gear, and more.



Image: The ARKSEN 84-inch Roof Rack Cargo Basket, showcasing its robust black steel frame and mesh base.

## SETUP AND INSTALLATION

This section provides detailed instructions for assembling and installing your ARKSEN Roof Rack Cargo Basket. Please ensure you have all components before beginning.

### 1. Unboxing and Component Verification

Carefully unbox all components. Refer to the included manual for a complete list of parts. Ensure all pieces are present and undamaged.

Your browser does not support the video tag.

Video: A user unboxing the ARKSEN roof rack, showing the well-packaged components and the instruction manual. This video demonstrates the initial unboxing and organization of parts.

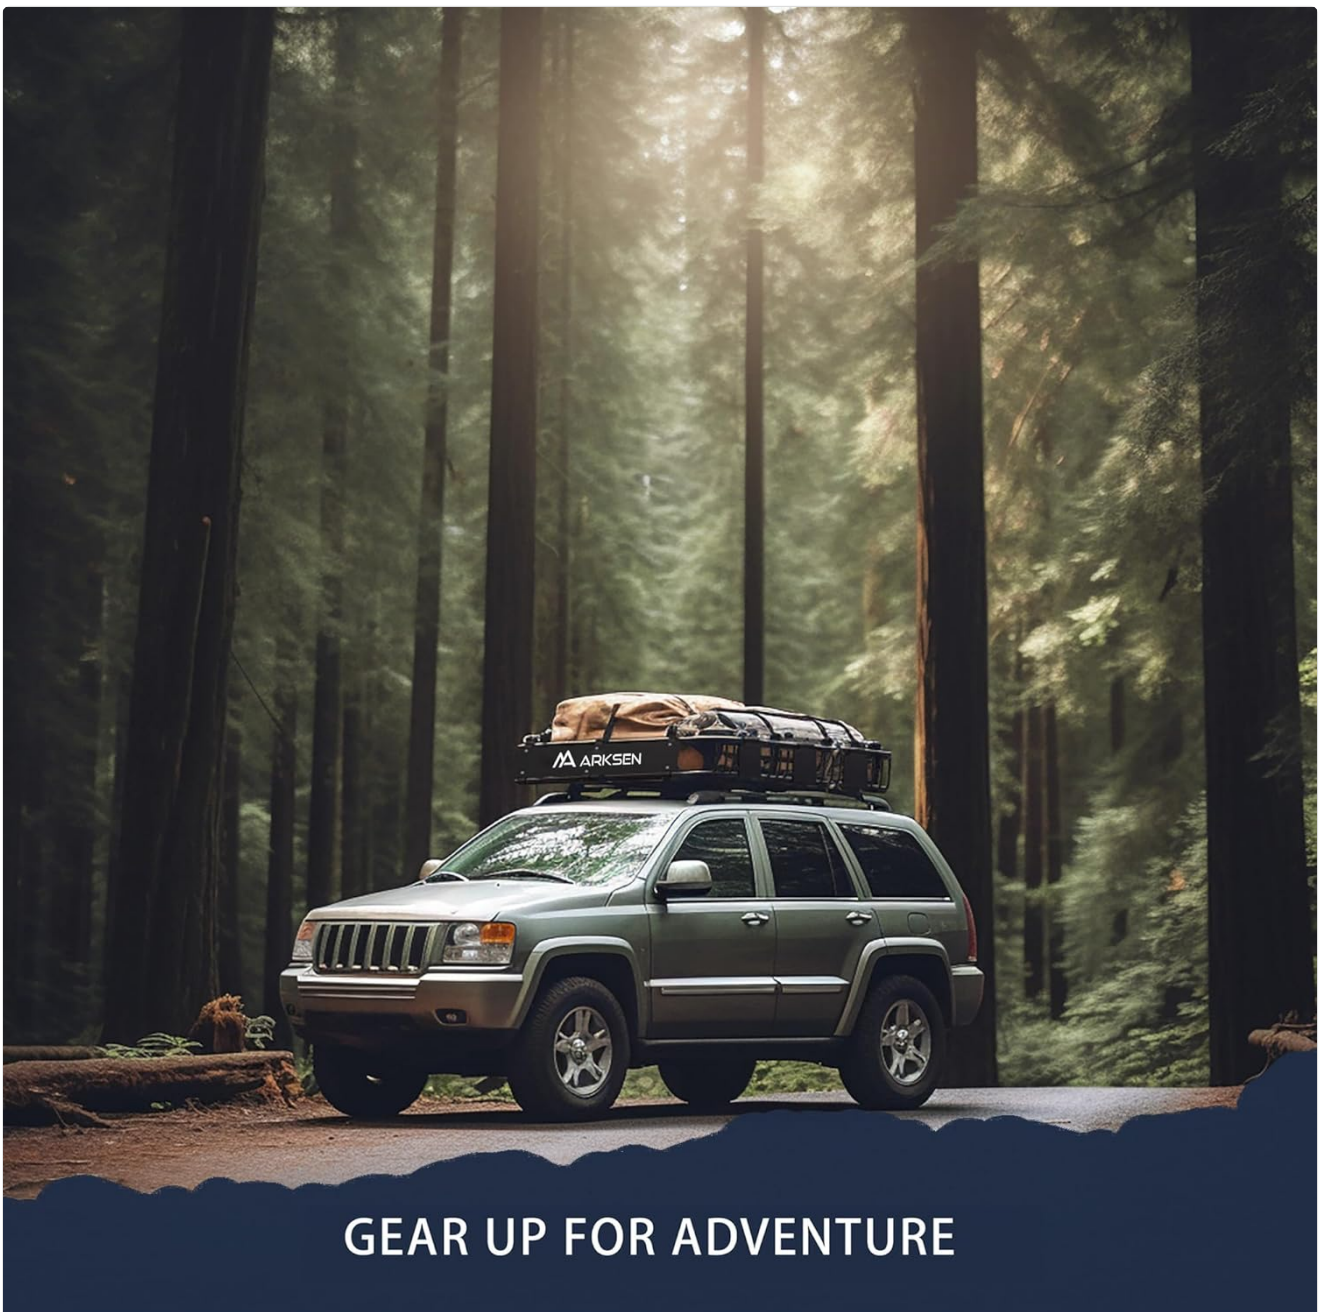


Image: All components of the ARKSEN roof rack laid out, including the main basket sections, mounting hardware, and the instruction

manual, ready for assembly.

## 2. Assembly of Basket Sections

The cargo basket is designed in multiple sections for adjustable length. Connect the sections according to your desired length (e.g., 84 inches for the full size). Ensure all connections are secure.



Image: A diagram illustrating the modular design of the ARKSEN roof rack, showing how different sections connect to achieve various lengths (43", 64", 84").

# Versatile Roof Basket

Customize your cargo to your specific needs.



Shield cargo



Tie down gear



Keep dirty gear outside



Image: A user assembling the main sections of the ARKSEN roof rack on a cardboard surface, demonstrating the process of connecting the basket segments.

### 3. Mounting to Vehicle Crossbars

The cargo basket mounts directly to your vehicle's existing crossbars using the provided universal U-bolts. Ensure your vehicle has crossbars installed before proceeding. Position the basket centrally on the crossbars and secure it firmly with the U-bolts.

**Important: Crossbars are not included with this product.**

# CAN ONLY BE INSTALLED ON VEHICLES WITH CROSSBARS



\* Crossbars are not included

**ARKSEN**

Image: A close-up view of the U-bolt mounting mechanism, showing how the cargo basket attaches to a vehicle's crossbar. Dimensions for U-bolt space are indicated.

# ROOF RACK DIMENSIONS


FITS UP TO  
**42**  
Cubic Feet



Supports  
**150 LBS**



**Anti-Rust**  
Coated Steel

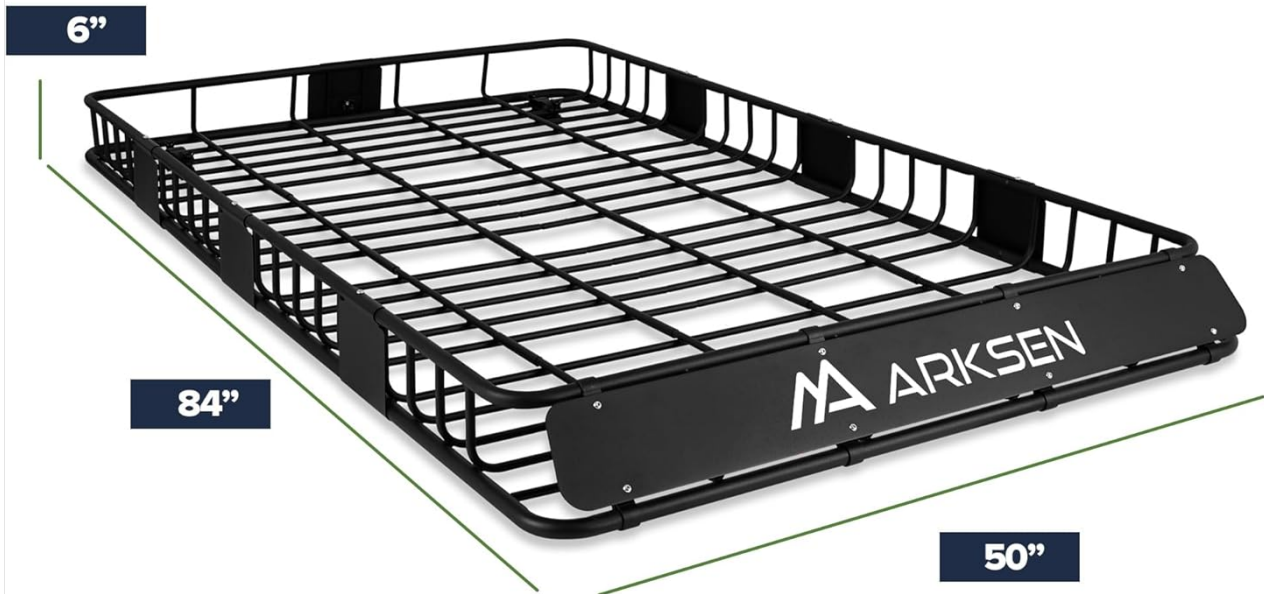

**ARKSEN**

Image: The ARKSEN roof rack fully installed on a vehicle, viewed from the side, demonstrating its appearance and fit on the roof.

## 4. Wind Fairing Installation

Attach the steel wind fairing to the front of the cargo basket. This component helps reduce wind noise and resistance. The fairing is reversible, allowing you to choose between a branded or stealthy appearance.

# Reversible Wind Fairing

Choose between a branded or stealthy appearance



Image: A close-up of the ARKSEN roof rack's wind fairing, showing its design and how it integrates with the front of the basket to improve aerodynamics.

## OPERATING INSTRUCTIONS

Once installed, the ARKSEN Roof Rack Cargo Basket is ready for use. Follow these guidelines for optimal performance and safety.

### Loading Cargo

- **Weight Limit:** Do not exceed the maximum load capacity of 150 lbs (68 kg). Also, be aware of your vehicle's roof load limit, which may be lower.
- **Even Distribution:** Distribute weight evenly across the basket to maintain vehicle stability. Place heavier items at the bottom and center.
- **Secure Fastening:** Always use appropriate tie-downs, cargo nets, or straps to secure all items within the basket. Ensure no items can shift, slide, or fall off during transit.
- **Clearance:** Be mindful of the increased height of your vehicle with the loaded cargo basket, especially when entering garages, carports, or low-clearance areas.

# Versatile Roof Basket

Customize your cargo to your specific needs.



Shield cargo



Tie down gear



Keep dirty gear outside



Image: The ARKSEN roof rack shown with various types of cargo, such as bags and coolers, secured with a cargo net, demonstrating its versatility for different gear.

## MAINTENANCE

Regular maintenance will ensure the longevity and safe operation of your ARKSEN Roof Rack Cargo Basket.

- **Regular Inspection:** Periodically check all bolts, nuts, and connections for tightness, especially after initial installation and before long trips.
- **Cleaning:** Clean the rack with mild soap and water. Avoid abrasive cleaners or solvents that could damage the powder coating.
- **Rust Prevention:** While the rack has a powder coating, inspect for any chips or scratches that could expose bare metal to moisture, leading to rust. Touch up any damaged areas with rust-inhibiting paint if necessary.
- **Storage:** If removing the rack for extended periods, store it in a dry place to prevent corrosion.

## TROUBLESHOOTING

Here are some common issues and their potential solutions:

Problem	Possible Cause	Solution
Excessive Wind Noise	Improperly installed wind fairing or loose components.	Ensure the wind fairing is securely attached and facing the correct direction. Check all rack components for tightness.
Rack Feels Loose	Mounting hardware (U-bolts) are not tightened sufficiently.	Re-tighten all U-bolts and other connection points. Ensure the rack is properly seated on the vehicle's crossbars.
Rust Appears on Rack	Scratches or chips in the powder coating exposing metal to moisture.	Clean the rusted area, sand lightly to remove rust, and apply rust-inhibiting paint to prevent further corrosion.

## SPECIFICATIONS

Attribute	Detail
Brand	ARKSEN
Model Number	005-TH-RRW84
Color	Black
Item Dimensions (L x W x H)	84 x 50 x 6 inches
Load Capacity	150 Pounds
Mounting Type	U-Bolt
Automotive Fit Type	Universal Fit
Item Weight	55.3 pounds
UPC	192928018523
Date First Available	June 16, 2020

## WARRANTY INFORMATION

ARKSEN products typically come with a 1-year warranty. For specific details regarding your product's warranty

coverage, please refer to the documentation included with your purchase or contact ARKSEN customer support.



Image: A badge indicating a 1-year warranty, symbolizing the product's coverage.

## **CUSTOMER SUPPORT**

For any questions, technical assistance, or warranty claims, please contact ARKSEN customer support through their official channels. You may also find additional resources and FAQs on the ARKSEN brand store on Amazon.

**[Visit the ARKSEN Store on Amazon](#)**