

2.4. Power Saving Sleep Mode (Level 1)
The keyboard backlight turns off after 5 minutes of inactivity. Press any key to wake up the backlit keyboard.

2.5. Deep Sleep Mode (Level 2)
The keyboard enters deep sleep after 30 minutes of inactivity, disconnecting BT/2.4G and enter to wake up the backlight and reconnect BT/2.4G.

4. Lighting Mode Instructions

FN-1: Switch lighting effects, 20 effects cycle in sequence
FN-2: Increase brightness [six levels], the backlight will flash 3 times at the limit
FN-3: Decrease brightness [six levels], the backlight will flash 3 times at the limit
FN-4: Switch dynamic lighting direction
FN-5: Switch backlight color
FN-6: Increase lighting speed [six levels], the backlight will flash 3 times at the limit
FN-7: Decrease lighting speed [six levels], the backlight will flash 3 times at the limit
FN-8: Turn off the lights

key board enters pairing mode, BT connection is successful, the "H" key stops flashing (cyan light), and the lighting effect follows the system.

③. **BT Channel 3: A6563-9**
Switching Method: Toggle the switch to the left to switch to BT mode. Short press the "TV+L" combination key to switch to BT mode channel 3.
Pairing Method: In BT mode, long press the "TV+L" combination key for 3 seconds, the "L" key will flash quickly (purple light), the key board enters pairing mode, BT connection is successful, the "L" key stops flashing (purple light), and the lighting effect follows the system.

keyboard to the USB part of the computer host. USB is plug and play.
[In any mode, inserting the USB can charge the keyboard]



JAZZ

Scroll Wheel Function Key Instructions

- Rotate Up: Volume +
- Rotate Down: Volume -
- Press Left: Mute



3 New axis calibration pin and hole position

③ Battery display (green display for full power, yellow display for 20%-80%, and red display for 20%)

Time display

Connect to MAC/WiN system display

Connect BT/2.4G/USB wired mode display

Lock WiN display

Switch display between upper and lower case

Digital area switch display



Brightness adjustment: [Enter the setting page, the knob controls the left and right directions, press the knob to confirm]

Setup

Light brightness

Light brightness 0%

Light brightness 20%

Light brightness 40%

Light brightness 60%

Light brightness 80%

Light brightness 100%


Warning Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

These conditions or modifications not expressly approved by the party responsible for compliance may void the user's authority to operate the equipment.

Important: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference to a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to your television or television set, you may be able to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

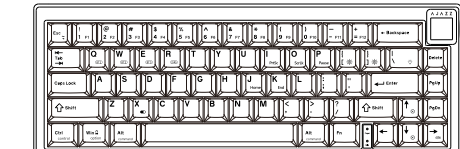

Jika tidak ada tombol yang ditekan selama 5 menit, lampu latar keyboard akan mati. Tekan tombol apa saja untuk menghidupkan kembali lampu latar keyboard dan menyambungkan kembali ke mode BT/2.4G.

FM+ : Tintak Kecerahan - 0 level Ketika disetel ke batas minimum latar belakang secara keseluruhan akan berkedip tiga kali sebagai indikasi.

BT berhasil terhubung, simbol "Q" (berwarna biru) akan berhenti berkedip dan lampu akan kembali ke efek lampu normal.

melebihi batas waktu, perangkat akan masuk ke mode hibernasi [hibernate].

Perpustakaan hingga terbiasa seribu:
Putar ke atas: volume +
Putar ke bawah: volume -
Tekan ke kiri: mode mute (suara mati)

④ Pasang switch dengan mendakarkannya secara vertikal.

4. Tampilan Mode Koneksi BT/2.4G/USB Kabel