

IMXRT1180EC

i.MX RT1180 Crossover Processors Data Sheet

Rev. 6 — 1 July 2025

Product Data Sheet

- This document provides electrical and packaging specifications for i.MX RT1180 Crossover Processors family, along with other useful information for hardware design.
- For further functional characteristics and the programming model, see i.MX RT1180 Reference Manual.



1 i.MX RT1180 introduction

The i.MX RT1180 is a high-performance processor of the i.MX RT family, which features a high performance Arm® Cortex®-M7 core operating at speeds up to 800 MHz and a power efficient Cortex-M33 core up to 300 MHz.

i.MX RT1180 features industrial gateway capabilities that enable the support of Industrial Real-time protocol (Profinet, EtherCAT, EtherNet/IP, and etc) as well as the latest TSN based protocols through a state of the art Ethernet switch subsystem and a large 1.5 MB on-chip RAM protected with ECC.

The i.MX RT1180 further integrates advanced power management module with DCDC and LDO regulators that reduce complexity of external power supply and simplifies power sequencing, as well as a large subsystem to enable a large set of application: memory interfaces, connectivity interfaces (CAN-FD, LPUART, LPSPI, LPI2C, FlexIO, etc.). i.MX RT1180 also integrate an advance Secure Enclave subsystem.

The i.MX RT1180 is designed for applications over various segments such as Industrial automation, Building automation, Energy, or IoT for example. It supports applications such as:

- AC Drives
- Servo Drive
- Gateway
- Motor Control
- Industrial Network companion chips

1.1 Features

The i.MX RT1180 processors are based on Arm Cortex-M7 Core Platform, which has the following features:

- The Arm Cortex-M7 Core Platform:
 - 32 KB L1 Instruction Cache and 32 KB L1 Data Cache
 - Floating Point Unit (FPU) with single-precision and double-precision supports of the Armv7-M architecture FPv5
 - Support the Armv7-M Thumb instruction set, defined in the Armv7-M architecture
 - Integrated Memory Protection Unit (MPU), up to 16 individual protection regions
 - Up to 512 KB I-TCM and D-TCM in total
 - Frequency of 800 MHz at 1.1 V (over drive) with Forward Body Biasing (FBB)
 - ECC support for both Cache and Tightly Coupled Memory (TCM)
 - Frequency of the core, as per [Table 10](#)
- The Arm Cortex-M33 Core platform:
 - Micro-controller available both for boot and customer application
 - 16 KB Code Cache, 16 KB System Cache, and 256 KB TCM (also accessible as SRAM by the rest of the system)
 - Frequency is 300 MHz at 1.1 V without body biasing
 - ECC support for both Cache and TCM
- On-chip memory:
 - Boot ROM (160 KB)
 - 512 KB TCM for CM7 with ECC
 - 256 KB TCM for CM33 with ECC
 - Dedicated 768 KB OCRAM with ECC
- External memory interfaces:

- Smart External Memory Controller (SEMC)
 - 8/16/32-bit SDRAM interface, 4 Chip Selects (CS) and each CS up to 1024 Mb
 - 8/16-bit NAND FLASH interface with hardware ECC
 - 8/16-bit NOR FLASH interface
 - SRAM: supports SRAM and Pseudo SRAM, 8-bit and 16-bit modes, ADMUX, AADM, and Non-ADMUX modes, up to 4 CS, up to 4096 Mb memory size
- FlexSPI
 - Single/Dual channel Quad SPI FLASH with XIP support
 - Hyper RAM/FLASH
 - PSRAM
 - OCT RAM/FLASH
 - OTFAD is supported for decryption with 0 cycle delay
- SRAMC Interface (FPGA I/F)

Each i.MX RT1180 processor enables the following interfaces to external devices (some of them are muxed and not available simultaneously):

- Audio:
 - SPDIF input and output
 - Synchronous Audio Interface (SAI) modules supporting I2S, AC97, TDM, and codec/DSP interfaces
 - Digital microphone input, 8-channel PDM
 - Asynchronous Sample Rate Converter (ASRC)
- Connectivity:
 - USB 2.0 OTG controllers with integrated PHY interfaces
 - Ultra Secure Digital Host Controller (uSDHC) interfaces
 - uSDHC2 with boot support for eMMC 5.1 compliance with HS400 DDR signaling to support up to 400 MB/sec
 - uSDHC1 with boot support for SD/SDIO 3.0 compliance with 200 MHz SDR signaling to support up to 100 MB/sec
 - Support for SDXC (extended capacity)
 - Low power universal asynchronous receiver/transmitter (LPUARTs) modules
 - LPI2C modules
 - I3C modules
 - LPSPI modules
 - Control Area Network (FlexCAN) modules, each with support in hardware to support Flexible Data Rate (FD), with enhanced RX FIFO.
 - FlexIO modules
 - Advanced and flexible Ethernet
 - Third version of NXP TSN switch IP (NETC 3.0)
 - Port virtualization support on ENETC0 MAC for dual Access (CM33/CM7)
 - Extended support of TSN standards over flexible architecture
 - 1x independent 1 Gbps TSN MAC endpoint
 - 5-port (4 external + 1 internal) TSN Switch with 1 Gbps TSN MAC

- OPC UA Frame Summation HW acceleration integrated in switch
- Up to 5 RGMII/MII/RMII external ports
- FlexSPI follower
- Dual ports EtherCAT Slave Controller
- ADC/CMP
 - 16-bit dual-channel SAR ADC (16 channels on ADC1 and 14 channels on ADC2), 3.5 Msps, each ADC can proceed 2 conversions simultaneously
 - 12-bit DAC
 - Analog Comparators (ACMP)
 - SINC filters (4-channel) to interface to external sigma-delta ADC
 - Voltage Reference (VREF)
- GPIO and Pin Multiplexing:
 - General-purpose input/output (GPIO) modules with interrupt capability
 - Input/output multiplexing controller (IOMUXC) to provide centralized pad control

The i.MX RT1180 processors integrate advanced power management unit and controllers:

- Full PMIC integration, including on-chip DCDC and LDOs
- Temperature sensor with programmable trim points
- GPC Hardware power management controller
- Timers and PWMs:
 - General Programmable Timer (GPT) modules
 - 4-channel generic 32-bit resolution timer for each
 - Each supports standard capture and compare operation
 - Low Power Periodical Interrupt Timer (LPIT) modules
 - 4-channel
 - 4 external trigger sources
 - Generic 32-bit resolution timer
 - Periodical interrupt generation
 - Timer/PWM modules (TPM)
 - Prescaler divide-by 1, 2, 4, 8, 16, 32, 64, or 128
 - 32-bit counter, support free-running counter or modulo counter mode, counting up or down
 - Includes 4 channels that can be configured for input capture, output compare, edge-aligned PWM mode, or center-aligned PWM mode
 - Low-Power Timer (LPTMR) modules
 - Quad Timer (TMR) modules
 - 4-channel generic 16-bit resolution timer for each
 - Each supports standard capture and compare operation
 - Enhanced Quadrature decoder integrated
 - FlexPWM modules

- Up to 8 individual PWM channels for each
- 16-bit resolution PWM suitable for Motor Control applications
- Enhanced Quadrature Decoders (eQDC)
- Watchdog Timer (WDOG)
 - 1x for the Cortex-M33 non-secure, 1x for Cortex-M33 secure, 1x for the Cortex-M7 and 2x additional for customer usage
 - 1x External Watchdog Monitor (EWM)

The i.MX RT1180 processors support the following system debug:

- Arm Cortex-M7 CoreSight™ debug and trace architecture
- CoreSight Serial Wire Output (SWO) and Embedded Trace Router (ETR) can allow routing trace data to system memory
- Support for 5-pin (JTAG) and SWD debug interfaces

Security functions are enabled and accelerated by the following hardware:

- Trusted Resource Domain Controller (TRDC)
 - Supports up to 16 resource domains
- TrustZone®-M (TZ-M) on Cortex-M33
- Physical Unclonable Function (PUF)
- EdgeLock® secure enclave
 - Advanced security: AES, AES-GCM, PKA, ECDSA/ECDH, TRNG, AES-256, SHA, DES, 3DES, RSA4096, ECC1024, UniqueID, Secure Boot, Secure RTC, Tamper Monitor
 - Public Key co-processor
 - Symmetric Crypto Accelerators
 - Random number generator
 - One-Time Programmable electrical fuse used for security keys and configuration other security related functions
 - Physically Unclonable Function based primary secrets as an option
- Battery Backed Security Module (BBSM)
 - Monotonic counter
 - Secure real-time clock (RTC)
 - Zeroizable Primary Key
- Inline Encryption Engine (IEE)
 - External memory encryption and decryption
 - I/O direct encrypted storage and retrieval (Stream Support)
- On-The-Fly AES Decryption (OTFAD)
 - Support OTFAD with 4 keys

NOTE

The actual feature set depends on the part numbers as described in [Table 1](#). Functions such as CM7 core platform, SEMC, connectivity interfaces, and SINC are not offered on all derivatives.

1.2 Ordering information

[Table 1](#) provides examples of orderable part numbers covered by this Data Sheet.

Table 1. Ordering information

	Attribute	MIMXRT1189CV M8C MIMXRT1189XV M8C	MIMXRT1187CV M8C MIMXRT1187XV M8C	MIMXRT1186CV J8C MIMXRT1186XV J8C	MIMXRT1182CV P2C MIMXRT1182XV P2C	MIMXRT1181CV P2C MIMXRT1181XV P2C
Qualification tier	—	Industrial / Extended Industrial				
Core platform	Cortex®-M7	800 MHz			—	
	M7 Cache	32 KB I-Cache 32 KB D-Cache			—	
	TCM (I/D/O)	512 KB (I/D) with ECC			—	
	Cortex®-M33	300 MHz				
	M33 Cache	16 KB C-Cache 16KB S-Cache				
	TCM (C/S)	256 KB with ECC				
On chip RAM	OCRAM	768 KB with ECC				
External memory	SEMC	1x 32-bit		1x 16-bit	—	
	FlexSPI	2				
	SRAMC	Yes				
Security	EdgeLock® Secure enclave	Yes				
	IEE	1				
	OTFAD	Yes				
	TRDC	Yes				
	BBSM	Yes				
	Secure key management	PUF				
	Tamper monitor	Yes				
	Tamper pin	10		2	4	
Audio	SPDIF	1				

Table continues on the next page...

Table 1. Ordering information...continued

	Attribute	MIMXRT1189CV M8C MIMXRT1189XV M8C	MIMXRT1187CV M8C MIMXRT1187XV M8C	MIMXRT1186CV J8C MIMXRT1186XV J8C	MIMXRT1182CV P2C MIMXRT1182XV P2C	MIMXRT1181CV P2C MIMXRT1181XV P2C
	SAI	4		3: SAI1, SAI2, SAI4	1:SAI1	
	PDM	1				
	ASRC	1				
GPIO	Pin number	173		124	82	
	GPIO	Yes				
	FlexIO	2				
Connectivity	USB 2.0 OTG controller	2		1: USB1	—	
	USB HS PHY	2		1: PHY1	—	
	uSDHC	2		1: uSDHC2		
	NETC 3.0	5-port		3-port ¹		
	EtherCAT slave controller	2-port	—	2-port		—
	FlexSPI follower	1				
	LPUART	12		8: LPUART1-LPUART8		
	LPI2C	6		4: LPI2C1-LPI2C3, LPI2C6	3: LPI2C1-LPI2C3	
	I3C	2				
	KPP	1				
	LPSPi	6				
	CANFD	3		2: CAN1, CAN3		
Timer	GPT	2				
	LPIT	3				
	TMR	8			4: TMR1-TMR4	

Table continues on the next page...

Table 1. Ordering information...continued

	Attribute	MIMXRT1189CV M8C MIMXRT1189XV M8C	MIMXRT1187CV M8C MIMXRT1187XV M8C	MIMXRT1186CV J8C MIMXRT1186XV J8C	MIMXRT1182CV P2C MIMXRT1182XV P2C	MIMXRT1181CV P2C MIMXRT1181XV P2C
	FlexPWM	4			2: FlexPWM3, FlexPWM4	
	eQDC	4				
	TPM	6		4: TPM1-TPM4	2: TPM1, TPM2	
	LPTMR	3			1: LPTMR1	
	WDOG	5				
	EWM	1				
	TSTMR	1				
	SCTR	1				
Analog	SINC	3		3 ²	1: SINC3	
	16-bit ADC	2				
	VREF	1				
	DAC	1				
	ACMP	4		1: ACMP3		
Trigger	XBAR	3				
	AOI	4				
Package	—	289-pin MAPBGA, 14 mm x 14 mm, 0.8 mm pitch		196-pin MAPBGA 12 x 12 mm, 0.8 pitch	144-pin MAPBGA, 10 mm x 10 mm, 0.8 mm pitch	
Junction temperature T _j (°C)	—	Industrial: -40 to 105°C / Extended Industrial: -40 to 125°C				

1. See RT1186, RT1182 and RT1181 PINMUX information about port MAC interface type and speed limitations.

2. 1 channel for SINC1, 2 channels for SINC2, 4 channels for SINC3, see RT1186 PINMUX information.

Figure 1 describes the part number nomenclature so that characteristics of a specific part number can be identified (for example, cores, frequency, temperature grade, fuse options, and silicon revision).

Ensure to have the proper data sheet for specific part by verifying the temperature grade (junction) field and matching it to the proper data sheet. If there is any question, visit the web page nxp.com/IMXRT or contact an NXP representative for details.

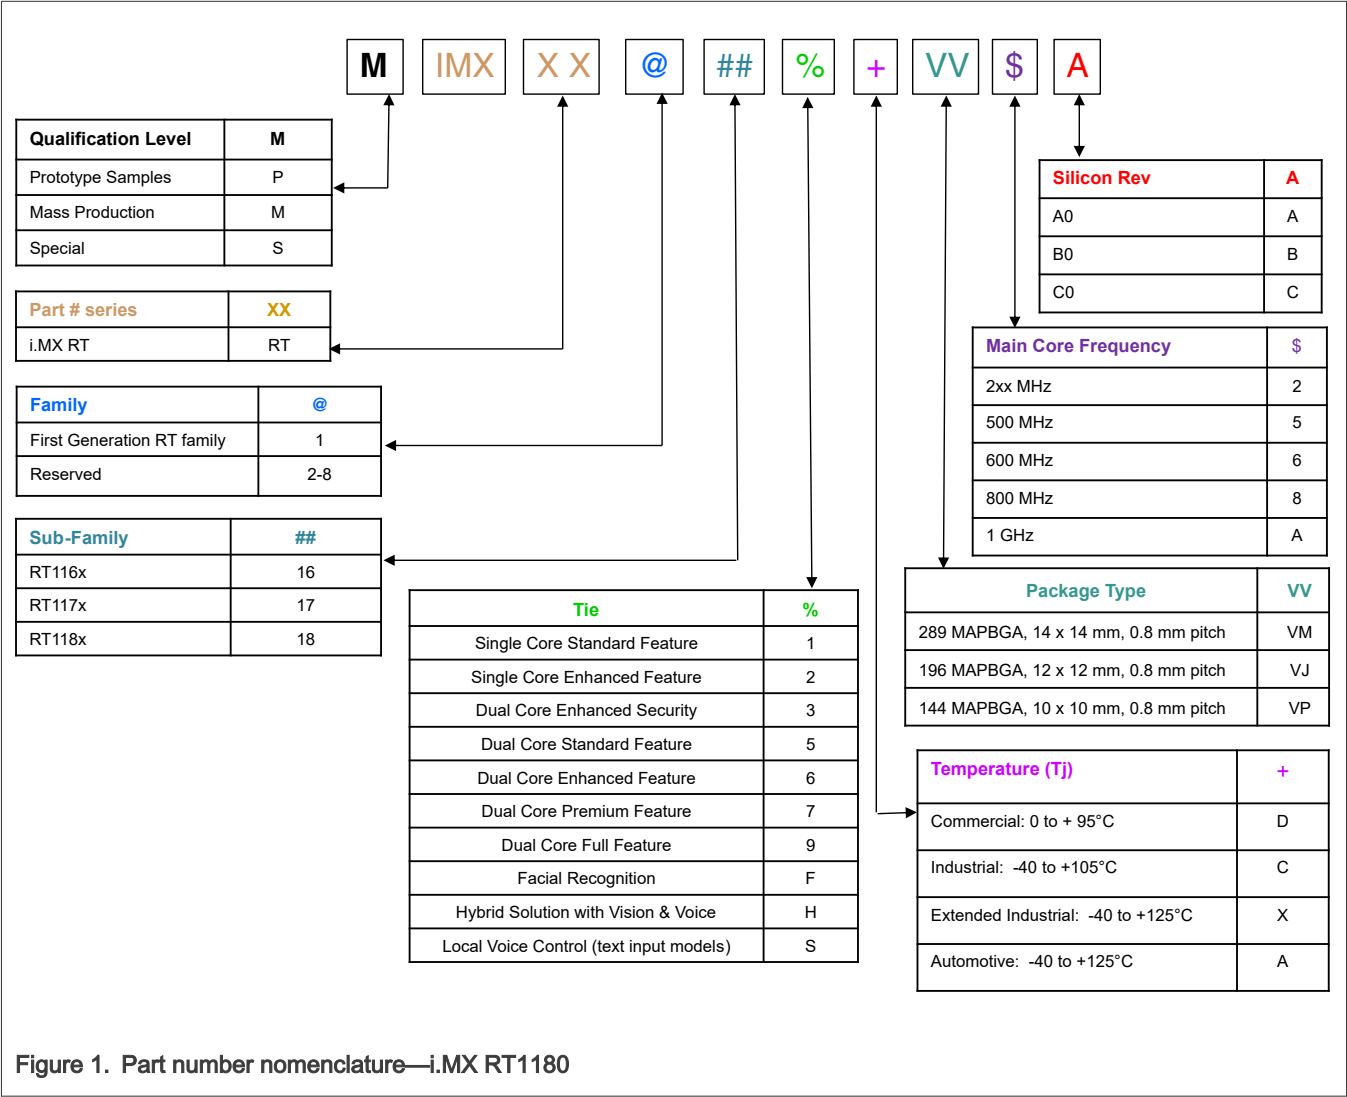


Figure 1. Part number nomenclature—i.MX RT1180

1.3 Package marking information

Figure 2 describes the package marking format about the i.MX RT1180 Crossover Processors.

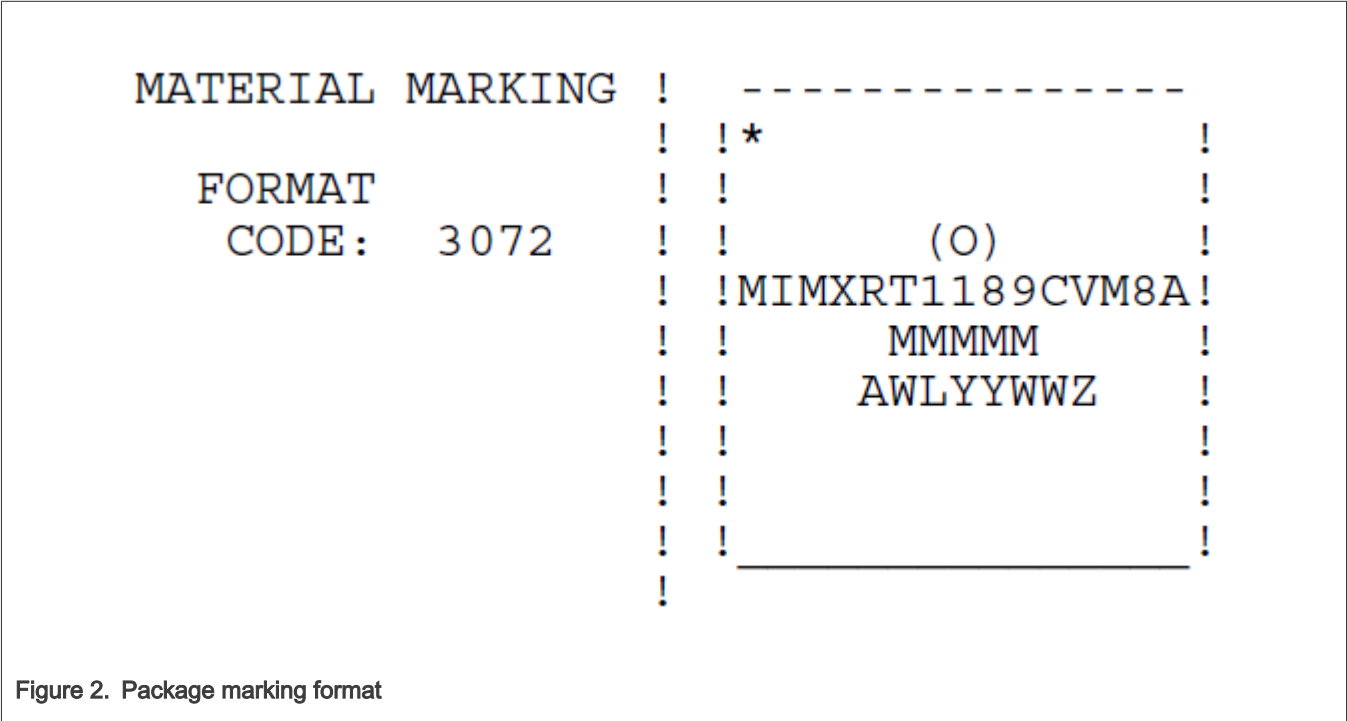


Figure 2. Package marking format

i.MX RT1180 packages have following top-side marking:

- First line: aaaaaaaaaaaaaa
- Second line: mmmmm
- Third line: xxxyywwx

Table 2 lists the identifier decoder.

Table 2. Identifier decoder for package

Identifier	Description
a	Part number code, see Ordering information
m	Mask set
y	Year
w	Work week
x	NXP internal use


2 Architectural overview

The following subsections provide an architectural overview of the i.MX RT1180 processor system.

2.1 Block diagram

Figure 3 shows the functional modules in the i.MX RT1180 processor system^[1].

[1] Some modules shown in this block diagram are not offered on all derivatives. See Table 1 for details.

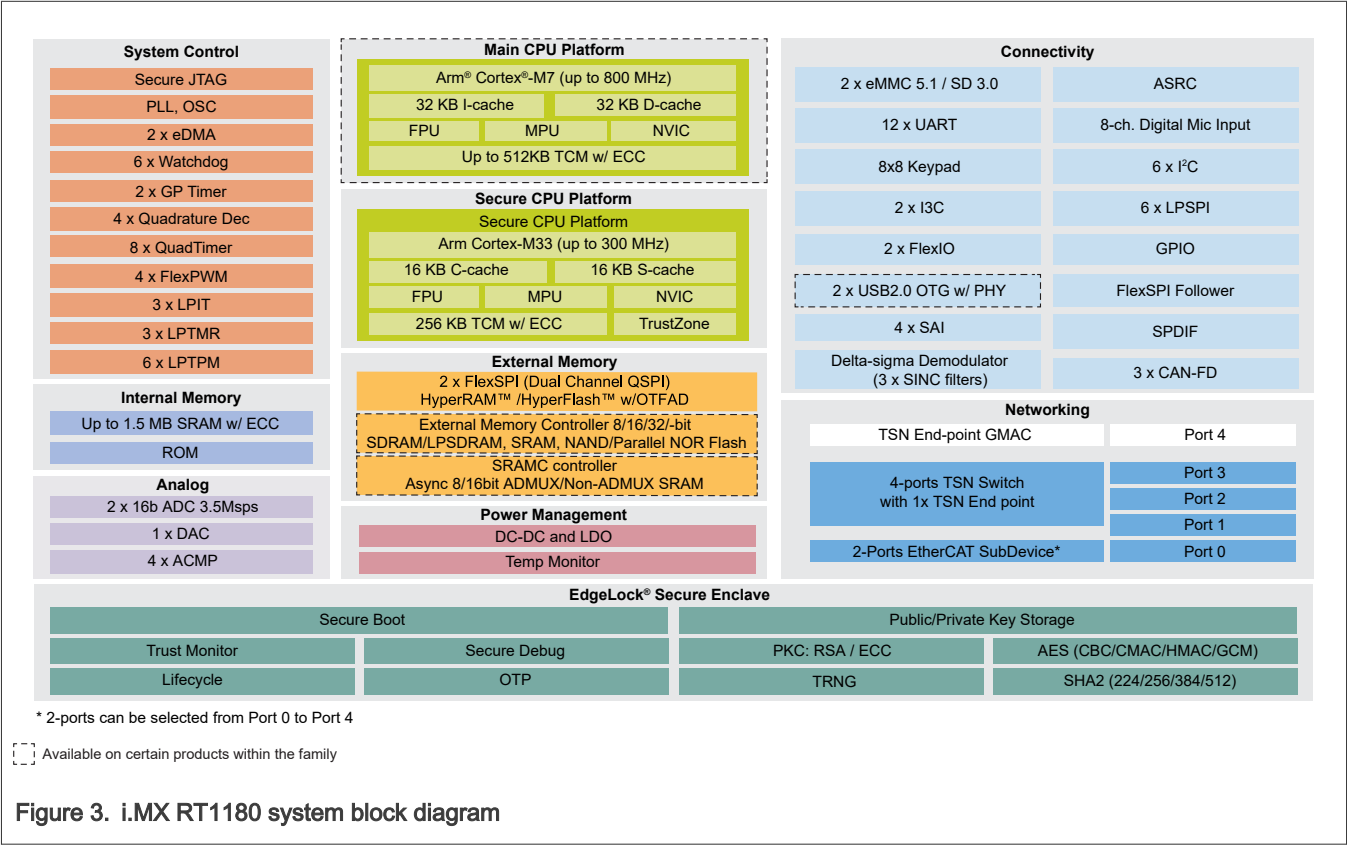

3 Special signal considerations

Table 3 lists special signal considerations for the i.MX RT1180 processors. The signal names are listed in alphabetical order. The package contact assignments can be found in [Package information and contact assignments](#). Signal descriptions are provided in the *i.MX RT1180 Reference Manual* (IMXRT1180RM).

Table 3. Special signal considerations

Signal Name	Remarks
GPIO_AON_00, GPIO_AON_01, GPIO_AON_02	If not using eFuse setting, these I/Os level determine the boot mode. In case of boot mode pins immediately change state after POR_B released, user must ensure POR_B remains asserted until the last power rail reach its working voltage.
CLK1_P/ CLK1_N	It is used only for internal test, please keep CLK1_N/P pairs unconnected.
DCDC_PSWITCH	PAD is in DCDC_IN domain and connected the ground to bypass DCDC. To enable DCDC function, assert to DCDC_IN with at least 1ms delay after the DCDC_IN reaches the stable working voltage.
RTC_XTALI/RTC_XTALO	To hit the exact oscillation frequency, the board capacitors must be reduced to account for the board and chip parasitics. The integrated oscillation amplifier is self-biasing, but relatively weak. Care must be taken to limit the parasitic leakage from RTC_XTALI and RTC_XTALO to either the power or the ground (> 100 MΩ). This de-biases the amplifier and reduces the start-up margin.

Table continues on the next page...

Table 3. Special signal considerations ...continued

Signal Name	Remarks
	If you want to feed an external low-frequency clock into RTC_XTALI, the RTC_XTALO pin must remain unconnected or driven by a complementary signal. The logic level of this forcing clock must not exceed the VDD_BBSM_ANA level and the frequency shall be < 100 kHz under the typical conditions. When a high-accuracy real-time clock is not required, the system may use the on-chip RTC oscillator. The tolerance is $\pm 25\%$. The ring oscillator starts faster than the external crystal and is used until the external crystal reaches a stable oscillation. The ring oscillator also starts automatically if no clock is detected at RTC_XTALI at any time.
XTALI/XTALO	The system requires 24 MHz on XTALI/XTALO. The crystal can be eliminated if an external 24 MHz oscillator is available in the system. In this case, refer to section of Bypass Configuration (24 MHz) from the reference manual. The logic level of this forcing clock must not exceed the VDD_AON_ANA level.
JTAG_nnnn	External resistors can be used with all JTAG signals except for JTAG_TDO, but they are not required as the internal pull resistors design. See Table 4 for a summary of the JTAG interface.
NC	These signals are No Connect (NC) and should be disconnected by the user.
POR_B	See the System Boot chapter in the reference manual for the correct boot configuration. Note that an incorrect setting may result from an improper boot sequence. POR_B signal has internal 100 kΩ pull-up resistor in BBSM domain, can pull up to VDD_BBSM_ANA if need to add external pull-up resistor, otherwise it will cause additional leakage during BBSM (Battery) mode. It is recommended to add the external reset IC to the circuit to guarantee POR_B is properly processed during power up or power down, please refer to the EVK design for details. Note: - As the Low DCDC_IN detection threshold is 2.6 V, the reset IC's reset threshold must be higher than 2.6 V, then the whole chip is reset before the internal DCDC module reset to guarantee the chip safety during power down. - For power on reset, on any condition ones need to make sure the voltage on DCDC_PSWITCH pin is below 0.5 V before power-up.
ONOFF	A brief connection to GND in the OFF mode causes the internal power management state machine to change the state to ON. In the ON mode, a brief connection to GND generates an interrupt (intended to be a software-controllable power-down). Approximately five seconds (or more) to GND causes a forced OFF.
TEST_MODE	This input is reserved for NXP manufacturing use. The user must tie this pin directly to GND.
WAKEUP	A GPIO powered by BBSM domain power supply which can be configured as wakeup source in BBSM (Battery) mode.

Table 4. JTAG Controller interface summary

JTAG	I/O Type	On-chip Termination
JTAG_TCK	Input	20–50 k Ω pull-down
JTAG_TMS	Input	20–50 k Ω pull-up
JTAG_TDI	Input	20–50 k Ω pull-up
JTAG_TDO	3-state output	None
JTAG_TRSTB	Input	20–50 k Ω pull-up

3.1 Recommended connections for unused analog interfaces

Table 5 shows the recommended connections for unused analog interfaces.

Table 5. Recommended connections for unused analog interfaces

Module	Pad Name	Recommendations if Unused
RTC OSC	RTC_XTALI, RTC_XTALO	Not connected It is recommended that RTC_XTALI ties to GND if external crystal is not connected.
ADC	ADC_VREFH	10 k Ω resistor to ground
	VDDA_ADC_1P8	10 k Ω resistor to ground
	VDDA_ADC_3P3	10 k Ω resistor to ground
CCM	CLK1_N, CLK1_P	Not connected
DAC	DAC_OUT	Not connected
DCDC	DCDC_IN, DCDC_IN_Q	Not connected
	DCDC_SENSE, DCDC_LP	Not connected
	DCDC_PSWITCH, DCDC_MODE	To ground
GPIO_AD GPIO_AON	NVCC_GPIO_AD NVCC_AON	Connect to power supply. Configure the supply range as low range for 1.8 V mode and high range for 3 V mode to get benefit for power consumption.
USB	USB1_DN, USB1_DP, USB1_VBUS, USB2_DN, USB2_DP, USB2_VBUS	Not connected

Table continues on the next page...

Table 5. Recommended connections for unused analog interfaces ...continued

Module	Pad Name	Recommendations if Unused
	VDD_USB_1P8	Powered with 1.8 V
	VDD_USB_3P3	Powered with 3.3 V
SYS OSC	XTALI, XTALO	Not connected

4 Electrical characteristics

This section provides the device and module-level electrical characteristics for the i.MX RT1180 crossover processors.

4.1 Chip-level conditions

This section provides the device-level electrical characteristics for the IC. See [Table 6](#) for a quick reference to the individual tables and sections.

Table 6. i.MX RT1180 chip-Level conditions

For these characteristics	Topic appears
Absolute maximum ratings	Absolute maximum ratings
Thermal characteristics	Thermal characteristics
Operating ranges	Operating ranges
Maximum supply currents	Maximum supply currents
Typical power mode supply currents	Typical power mode supply currents
System power and clocks	System power and clocks

4.1.1 Absolute maximum ratings

CAUTION

Stress beyond those listed under [Table 10](#) may cause permanent damage to the device. These are stress ratings only. Functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

[Table 10](#) shows the absolute maximum operating ratings.

Table 7. Absolute maximum ratings

Parameter Description	Symbol	Min	Max	Unit
Power for digital logics	VDD_SOC	-0.3	1.2	V
Power for AON domain	VDD_AON_IN	-0.3	3.96	V
Power for DCDC	DCDC_IN	-0.3	3.96	V

Table continues on the next page...

Table 7. Absolute maximum ratings ...continued

Parameter Description	Symbol	Min	Max	Unit
Power for PLL, OSC, and LDOs	VDDA_1P8_IN	-0.3	1.98	V
Power for BBSM and Real Time Clock	VDD_BBSM_IN	-0.3	3.96	V
Power for USB OTG PHYs	VDD_USB_1P8	-0.3	1.98	V
	VDD_USB_3P3	-0.3	3.96	V
USB VBUS supply	USB1_VBUS	-0.3	5.6	V
	USB2_VBUS			
Power for ADC, DAC, and ACMP	VDDA_ADC_1P8	-0.3	1.98	V
	VDDA_ADC_3P3	-0.3	3.96	V
	ADC_VREFH	-0.3	1.98	V
IO supply for GPIO in SDIO1 bank (3.3 V mode)	NVCC_SD1	-0.3	3.96	V
IO supply for GPIO in SDIO1 bank (1.8 V mode)		-0.3	1.98	V
IO supply for GPIO in SDIO2 bank (3.3 V mode)	NVCC_SD2	-0.3	3.96	V
IO supply for GPIO in SDIO2 bank (1.8 V mode)		-0.3	1.98	V
IO supply for GPIO in EMC bank1 (3.3 V mode)	NVCC_EMC1	-0.3	3.96	V
IO supply for GPIO in EMC bank1 (1.8 V mode)		-0.3	1.98	V
IO supply for GPIO in EMC bank2 (3.3 V mode)	NVCC_EMC2	-0.3	3.96	V
IO supply for GPIO in EMC bank2 (1.8 V mode)		-0.3	1.98	V
IO power for GPIO in GPIO AD bank (3.3 V mode)	NVCC_GPIO_AD	-0.3	3.96	V
IO power for GPIO in GPIO AD bank (1.8 V mode)		-0.3	1.98	V
IO supply for GPIO in GPIO_B1 bank (3.3 V mode)	NVCC_GPIO1	-0.3	3.96	V
IO supply for GPIO in GPIO_B1 bank1 (1.8 V mode)		-0.3	1.98	V
IO supply for GPIO in GPIO_B2 bank (3.3 V mode)	NVCC_GPIO2	-0.3	3.96	V
IO supply for GPIO in GPIO_B2 bank1 (1.8 V mode)		-0.3	1.98	V
IO power for GPIO in AON bank (3.3 V mode)	NVCC_AON	-0.3	3.96	V
IO power for GPIO in AON bank (1.8 V mode)		-0.3	1.98	V
IO power for GPIO in BBSM bank (1.8 V mode)	NVCC_BBSM	-0.3	1.98	V

Table continues on the next page...

Table 7. Absolute maximum ratings ...continued

Parameter Description	Symbol	Min	Max	Unit
Input/Output Voltage range	V_{in}/V_{out}	-0.5	NVCC + 0.3 ¹	V
Storage Temperature range	$T_{STORAGE}$	-55	150	°C

1. NVCC is the I/O supply voltage.

Table 8. Electrostatic discharge and latch-up characteristics

Symbol	Description	Min	Max	Unit	Notes
V_{HBM}	Electrostatic discharge voltage: human body model	-2000	+2000	V	1
V_{CDM}	Electrostatic discharge voltage: charged-device model	-500	+500	V	2
I_{LAT}	Immunity level • Class II @105 °C ambient temperature	-100	+100	mA	3
I_{LAT}	Immunity level • Class II @125 °C ambient temperature	-100	+100	mA	

1. Determined according to JEDEC Standard JS001, *Electrostatic Discharge (ESD) Sensitivity Testing Human Body Model (HBM)*.
2. Determined according to JEDEC Standard JS002, *Field-Induced Charged-Device Model Test Method for Electrostatic-Discharge-Withstand Thresholds of Microelectronic Components*.
3. Determined according to JEDEC Standard JESD78, *IC Latch-up Test*.

4.1.2 Thermal characteristics

Table 9 displays the package thermal characteristics.

Table 9. Thermal characteristics

Rating	Board Type ¹	Symbol	Value			Unit
			10 x 10 mm	12 x 12 mm	14 x 14 mm	
Junction to Ambient Thermal Resistance	JESD51-9, 2s2p	$R_{\theta JA}$ ³	28.1	27.7	26.3	°C/W
Junction-to-Top of Package Thermal Characterization Parameter ²	JESD51-9, 2s2p	Ψ_{JT} ⁴	0.8	0.8	0.8	°C/W
Junction to Case Thermal Resistance ⁵	JESD51-9, 1s	$R_{\theta JC}$ ⁶	10.7	10.3	9.6	°C/W

1. Thermal test board meets JEDEC specification for this package (JESD51-9).

2. Determined in accordance to JEDEC JESD51-2A natural convection environment. Thermal resistance data in this report is solely for a thermal performance comparison of one package to another in a standardized specified environment. It is not meant to predict the performance of a package in an application-specific environment.

3. $R_{\theta JA} = (T_j - T_a)/P$ [unit: °C/W], where T_j = junction temperature, T_a = ambient temperature, P = device power.

4. $\Psi_{JT} = (T_j - T_x)/P$ [unit: °C/W], where T_j = junction temperature, T_x = temperature at top of package, P = device power.

5. Junction-to-Case thermal resistance determined using an isothermal cold plate. Case temperature refers to the mold surface temperature at the package top side dead centre.

6. $R_{\theta JC} = (T_j - T_c)/P$ [unit: °C/W], where T_j = junction temperature, T_c = case temperature, P = device power.


4.1.3 Power architecture

Full PMIC integration is the key advantage of i.MX RT1180 architecture. It simplifies hardware design and also reduces BOM cost.

- Integrated one DCDC to generated core power supply with dynamic voltage scaling capability
- Integrated LDOs to generate power for internal logics
- Integrated multiple Power Switches for sophisticated power mode management

The power architecture of i.MX RT1180 is as below, which shows the typical use case that the whole system works with a single 3.3 V power supply and a coin cell, similar to the power system of traditional MCU. For some other applications, i.MX RT1180 can have different power supply scheme. For example, with DCDC bypassed.

Figure 4 shows the power architecture of i.MX RT1180.

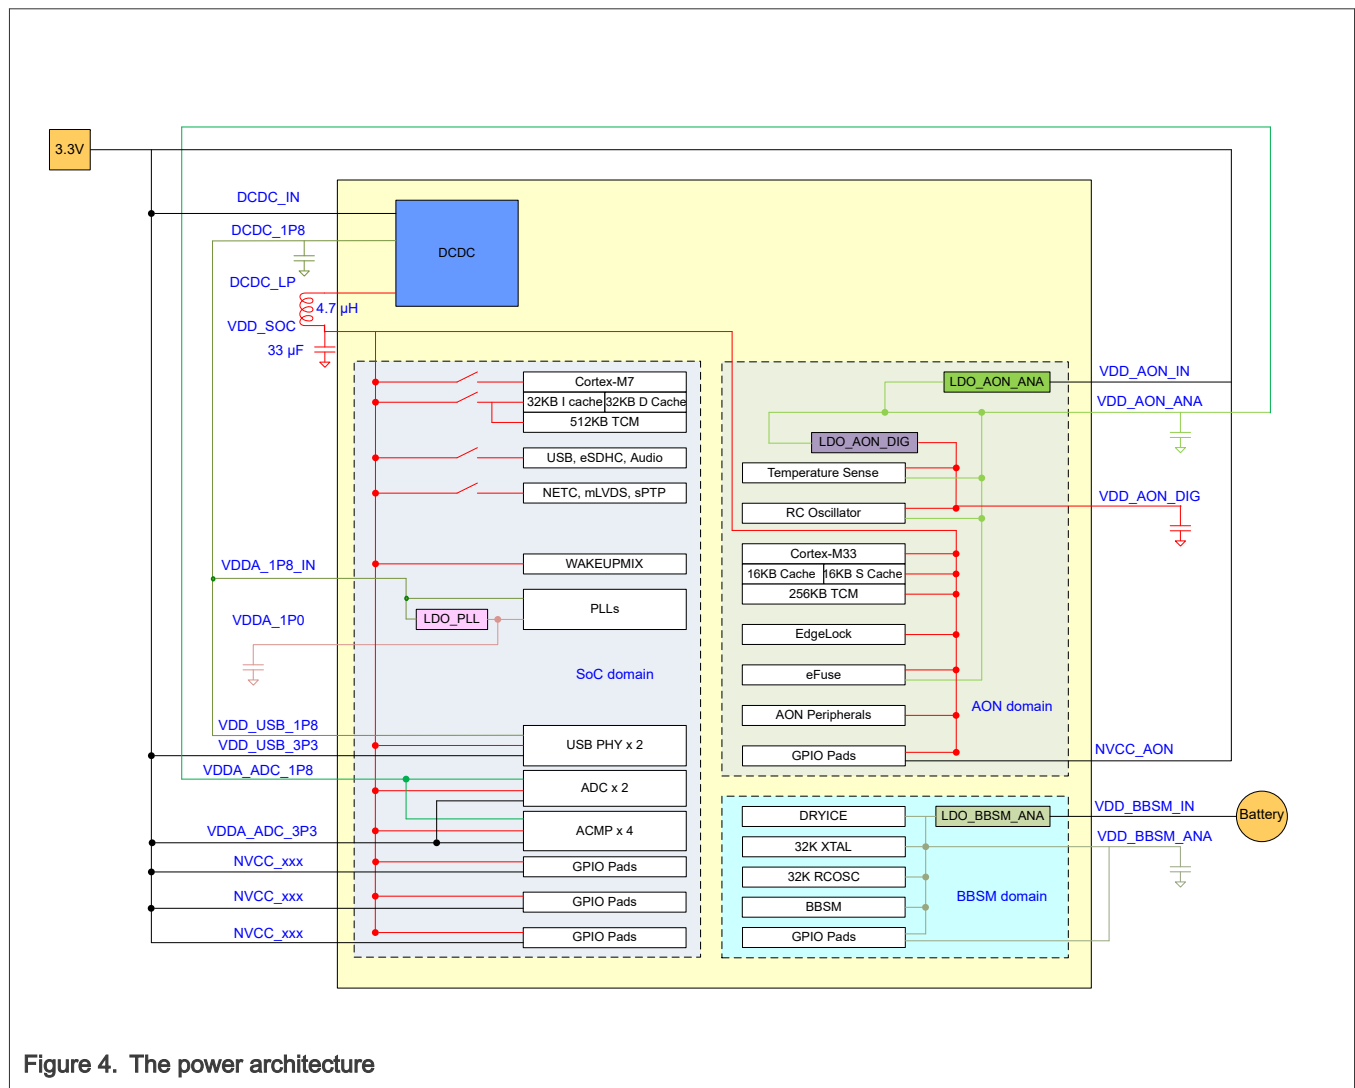

4.1.4 Operating ranges

Table 10 provides the operating ranges of the i.MX RT1180 processors. For details on the chip's power structure, see the "Power Management Unit (PMU)" chapter of the *i.MX RT1180 Reference Manual (IMXRT1180RM)*.

Table 10. Operating ranges

Parameter Description	Symbol	Operating Conditions	Min	Max ¹	Unit	Comment
Run Mode	VDD_SOC	M7 core at 800 MHz	1.1	1.15	V	Enable FBB when the frequency is higher than 600 MHz.
		M7 core at 600 MHz	1.0	1.15	V	—
		M7 core at 360 MHz	0.9	1.15	V	—
		M33 core at 300 MHz	1.1	1.15	V	—
		M33 core at 240 MHz	1.0	1.15	V	—
		M33 core at 100 MHz	0.9	1.15	V	—
Standby Mode	VDD_SOC	—	0.8	1.15	V	See Table 12 and Table 13
Power for DCDC	DCDC_IN	—	3.0	3.6	V	—
Power for PLL, OSC, and LDOs	VDDA_1P8_IN	—	1.71	1.89	V	—
Power for AON domain	VDD_AON_IN	—	3.0	3.6	V	—
Power for BBSM and RTC	VDD_BBSM_IN	—	2.4	3.6	V	—
Power for USB OTG PHYs	VDD_USB_1P8	—	1.65	1.95	V	—
	VDD_USB_3P3	—	3.0	3.6	V	—
USB VBUS supply	USB_VBUS	—	2.4	5.5	V	—
Power for ADC, DAC, and ACMP	VDDA_ADC_1P8	—	1.65	1.95	V	—
	VDDA_ADC_3P3	—	3.0	3.6	V	—
	ADC_VREFH	—	1.0	1.98	V	—
GPIO supplies	NVCC_SD1	—	3.0	3.6	V	IO power for GPIO in SDIO1 bank (3.3 V mode)
		—	1.65	1.95	V	IO power for GPIO in SDIO1 bank (1.8 V mode)

Table continues on the next page...

Table 10. Operating ranges ...continued

Parameter Description	Symbol	Operating Conditions	Min	Max ¹	Unit	Comment
	NVCC_SD2	—	3.0	3.6	V	IO power for GPIO in SDIO2 bank (3.3 V mode)
		—	1.65	1.95	V	IO power for GPIO in SDIO2 bank (1.8 V mode)
	NVCC_EMC1	—	3.0	3.6	V	IO power for GPIO in EMC bank1 (3.3 V mode)
		—	1.65	1.95	V	IO power for GPIO in EMC bank1 (1.8 V mode)
	NVCC_EMC2	—	3.0	3.6	V	IO power for GPIO in EMC bank2 (3.3 V mode)
		—	1.65	1.95	V	IO power for GPIO in EMC bank2 (1.8 V mode)
	NVCC_GPIO_AD	—	3.0	3.5	V	IO power for GPIO in GPIO bank (3.3 V mode)
		—	1.71	1.98	V	IO power for GPIO in GPIO bank (1.8 V mode)
	NVCC_GPIO1	—	3.0	3.6	V	IO power for GPIO in GPIO B1 bank (3.3 V mode)
		—	1.65	1.95	V	IO power for GPIO in GPIO B1 bank (1.8 V mode)
	NVCC_GPIO2	—	3.0	3.6	V	IO power for GPIO in GPIO B2 bank (3.3 V mode)
		—	1.65	1.95	V	IO power for GPIO in GPIO B2 bank (1.8 V mode)
	NVCC_AON	—	3.0	3.5	V	IO power for GPIO in AON bank (3.3 V mode)
		—	1.71	1.98	V	IO power for GPIO in AON bank (1.8 V mode)
	NVCC_BBSM	—	1.65	1.95	V	IO power for GPIO in BBSM bank (1.8 V mode)
Temperature Operating Ranges						
Junction temperature	T _j	Standard Industrial	-40	105	°C	See the application note, i.MX RT1180 Product Lifetime Usage Estimates for

Table continues on the next page...

Table 10. Operating ranges ...continued

Parameter Description	Symbol	Operating Conditions	Min	Max ¹	Unit	Comment
						information on product lifetime (power-on years) for this processor.
Junction temperature	TJ	Extended Industrial	-40	125	°C	See the application note, i.MX RT1180 Product Lifetime Usage Estimates for information on product lifetime (power-on years) for this processor.

1. Applying the maximum voltage results in maximum power consumption and heat generation. NXP recommends a voltage set point = ($V_{\min}$ + the supply tolerance). This results in an optimized power/speed ratio.

4.1.5 Maximum supply currents

The data shown in [Table 11](#) represents a use case designed specifically to show the maximum current consumption possible. All cores are running at the defined maximum frequency and are limited to L1 Cache accesses only to ensure no pipeline stalls. Although a valid condition, it would have a very limited practical use case, if at all, and be limited to an extremely low duty cycle unless the intention were to specifically show the worst case power consumption.

Table 11. Maximum supply currents

Power Rail	Comments	Max Current	Unit
DCDC_IN	Maximum current for chip at 105/125 °C	1000	mA
VDDA_1P8_IN	1.8 V power supply for PLL, OSC, and LDOs	50	mA
VDD_SOC	1.0 V power supply for digital logics	1000	mA
VDD_AON_IN	3.3 V power supply for AON domain	75	mA
VDD_BBBSM_IN	Power supply for BBBSM domain	1	mA
VDD_USB_1P8	1.8 V power supply for USB OTG PHYs	50	mA
VDD_USB_3P3	3.3 V power supply for USB OTG PHYs	60	mA
VDDA_ADC_1P8	1.8 V power supply for ADC, DAC, and ACMP	10	mA
VDDA_ADC_3P3	3.3 V power supply for ADC, DAC, and ACMP	2	mA
NVCC_SD1 NVCC_SD2 NVCC_EMC1 NVCC_EMC2 NVCC_GPIO1	$I_{\max} = N \times C \times V \times (0.5 \times F)$ Where: N—Number of IO pins supplied by the power line C—Equivalent external capacitive load V—IO voltage		

Table continues on the next page...

Table 11. Maximum supply currents ...continued

Power Rail	Comments	Max Current	Unit
NVCC_GPIO2 NVCC_GPIO_AD NVCC_AON NVCC_BBBSM	(0.5 x F)—Data change rate. Up to 0.5 of the clock rate (F) In this equation, I _{max} is in Amps, C in Farads, V in Volts, and F in Hertz.		

4.1.6 Typical power mode supply currents

Table 12 shows the current and power consumption (not including I/O) of i.MX RT1180 processors in selected power modes.

Table 12. Typical power modes current and power consumption (Dual core)

Modes	Test conditions	Power supplies at 3.3 V (Typical) ¹				Unit s
			25 °C Tj	105 °C Tj	125 °C Tj	
Over Drive Run 1 — Dual Cores	- CM7 runs at 800 MHz, overdrive voltage to 1.1 V with FBB mode; CM33 runs at 240 MHz, overdrive voltage to 1.1 V - CM7 domain bus frequency at 240 MHz; CM33 domain bus frequency at 133 MHz - ECC with Cache, TCM, and OCRM - DCDC, LDO_AON_ANA, and LDO_AON_DIG are turned on 400 MHz, external 24 MHz crystal, and external 32 kHz crystal are enabled - All PLLs are enabled - All peripherals are enabled and run at their maximum clock root frequency under overdrive mode	DCDC_IN	137.8	172.1	194.1	mA
		VDD_AON_IN	30.7	31.1	31.4	mA
		VDD_BBBSM_IN	4.9	9.7	16.2	μA
		Total	556.066	670.592	744.203	mW
Over Drive Run 2 — Dual Cores	- CM7 runs at 600 MHz, overdrive voltage to 1.1 V; CM33 runs at 300 MHz, overdrive voltage to 1.1 V - CM7 domain bus frequency at 240 MHz; CM33 domain bus frequency at 133 MHz - ECC with Cache, TCM, and OCRM - DCDC, LDO_AON_ANA, and LDO_AON_DIG are turned on	DCDC_IN	124.4	144.4	163.1	mA
		VDD_AON_IN	34.1	34.6	35.1	mA
		VDD_BBBSM_IN	4.5	8.9	15.3	μA
		Total	523.065	590.729	654.110	mW

Table continues on the next page...

Table 12. Typical power modes current and power consumption (Dual core) ...continued

Modes	Test conditions	Power supplies at 3.3 V (Typical) ¹				Unit s
			25 °C Tj	105 °C Tj	125 °C Tj	
	400 MHz, external 24 MHz crystal, and external 32 kHz crystal are enabled - All PLLs are enabled - All peripherals are enabled and run at their maximum clock root frequency under overdrive mode					
Normal Drive Run — Dual Cores	- CM7 runs at 600 MHz, drive voltage to 1.0 V; CM33 runs at 240 MHz, drive voltage to 1.0 V - CM7 domain bus frequency at 200 MHz; CM33 domain bus frequency at 133 MHz - ECC with Cache, TCM, and OCRAM - DCDC, LDO_AON_ANA, and LDO_AON_DIG are turned on 400 MHz, external 24 MHz crystal, and external 32 kHz crystal are enabled - All PLLs are enabled - All peripherals are enabled and run at their maximum clock root frequency under normal drive mode	DCDC_IN	96.6	110.7	122.7	mA
		VDD_AON_IN	32.6	33	33.3	mA
		VDD_BBSM_IN	4.7	9.4	15.6	µA
		Total	426.376	474.241	514.851	mW
Under Drive Run — Dual Cores	- CM7 runs at 360 MHz, lower voltage to 0.9 V; CM33 runs at 100 MHz, lower voltage to 0.9 V - CM7 domain bus frequency at 100 MHz; CM33 domain bus frequency at 50 MHz - ECC with Cache, TCM, and OCRAM - DCDC, LDO_AON_ANA, and LDO_AON_DIG are turned on 400 MHz, external 24 MHz crystal, and external 32 kHz crystal are enabled - All PLLs are enabled	DCDC_IN	60.8	69.8	78	mA
		VDD_AON_IN	30.3	30.6	30.9	mA
		VDD_BBSM_IN	4.6	9.2	15	µA
		Total	300.645	331.350	359.420	mW

Table continues on the next page...

Table 12. Typical power modes current and power consumption (Dual core) ...continued

Modes	Test conditions	Power supplies at 3.3 V (Typical) ¹				Unit s
			25 °C Tj	105 °C Tj	125 °C Tj	
	All peripherals are enabled and run at their maximum clock root frequency under underdrive mode					
Normal Drive Run — Single Core	- CM7 is power off; CM33 runs at 240 MHz, drive voltage to 1.0 V - CM33 domain bus frequency at 133 MHz - ECC with Cache, TCM, and OCRAM - DCDC, LDO_AON_ANA, and LDO_AON_DIG are turned on 400 MHz, external 24 MHz crystal, and external 32 kHz crystal are enabled - All PLLs are enabled - All peripherals are controlled by CM33 core run at their maximum clock root frequency under normal drive mode	DCDC_IN	74.8	83.6	91.2	mA
		VDD_AON_IN	32.6	33	33.3	mA
		VDD_BBSM_IN	4.4	9.4	15.3	μA
		Total	354.435	384.811	410.900	mW
Under Drive Run — Single Core	- CM7 is power off; CM33 runs at 100 MHz, lower voltage to 0.9 V - CM33 domain bus frequency at 50 MHz - ECC with Cache, TCM, and OCRAM - DCDC, LDO_AON_ANA, and LDO_AON_DIG are turned on 400 MHz, external 24 MHz crystal, and external 32 kHz crystal are enabled - All PLLs are enabled - All peripherals are controlled by CM33 core run at their maximum clock root frequency under underdrive mode	DCDC_IN	50.7	56.5	62	mA
		VDD_AON_IN	30.3	30.6	30.9	mA
		VDD_BBSM_IN	4.6	9.3	15	μA
		Total	267.315	287.461	306.620	mW
Normal Drive Wait	Both CM7 and CM33 are on WAIT mode, drive voltage to 1.0 V	DCDC_IN	76.1	88.9	99.8	mA
		VDD_AON_IN	32.6	33	33.3	mA

Table continues on the next page...

Table 12. Typical power modes current and power consumption (Dual core) ...continued

Modes	Test conditions	Power supplies at 3.3 V (Typical) ¹				Units
			25 °C Tj	105 °C Tj	125 °C Tj	
	- CM7 domain bus frequency at 200 MHz, CM33 domain bus frequency at 133 MHz - ECC with TCM and OCRAM - DCDC, LDO_AON_ANA, and LDO_AON_DIG are turned on 400 MHz, external 24 MHz crystal, and external 32 kHz crystal are enabled - All PLLs are enabled - All peripherals are enabled and run at their maximum clock root frequency under normal drive mode	VDD_BBBSM_IN	4.6	9.5	15.5	μA
		Total	358.725	402.301	439.281	mW
System Sleep Stop	- System is on Sleep mode - Both CM7 and CM33 are on STOP mode, lower voltage to 0.8 V - TCM and OCRAM with ECC is on retention - DCDC, LDO_AON_ANA, and LDO_AON_DIG are turned on - All clock sources are turned off except for 32 kHz RTC - All PLLs are power gated - The MEGAMIX domain and NETCMIX domain are power gated - All peripherals in both AONMIX domain and WAKEUPMIX domain are clocked.	DCDC_IN	5.3	7	8.7	mA
		VDD_AON_IN	1.1	1.2	1.2	mA
		VDD_BBBSM_IN	4.5	8.4	13.4	μA
		Total	21.135	27.088	32.714	mW
System Sleep Suspend	- System is on Sleep mode - CM7 is on SUSPEND mode and CM33 is on STOP mode, lower voltage to 0.8 V - TCM with ECC is on retention - DCDC, LDO_AON_ANA, and LDO_AON_DIG are turned on	DCDC_IN	0.372	2.6	5.1	mA
		VDD_AON_IN	222	351.7	447.1	μA
		VDD_BBBSM_IN	4.2	8.4	13.4	μA
		Total	1.974	9.768	18.350	mW

Table continues on the next page...

Table 12. Typical power modes current and power consumption (Dual core) ...continued

Modes	Test conditions	Power supplies at 3.3 V (Typical) ¹				Units
			25 °C Tj	105 °C Tj	125 °C Tj	
	- All clock sources are turned off except 32 kHz RTC - All PLLs are power gated - The MEGAMIX domain and NETCMIX domain are power gated - All peripherals in both AONMIX domain and WAKEUPMIX domain are clock gated, but remain powered					
Battery Mode	- Only BBSM domain is powered 32 kHz RTC is alive - DCDC_IN and VDD_AON_IN are power gated	DCDC_IN	0	0	0	μA
		VDD_AON_IN	0	0	0	μA
		VDD_BBSM_IN	4.1	8.2	13.1	μA
		Total	13.53	27.06	43.23	μW

1. Code runs in the ITCM; typical values are the average values on typical process wafers.

Table 13 shows the current and power consumption (Single core) of i.MX RT1180 processors in selected power modes.

Table 13. Typical power modes current and power consumption (Single core)

Modes	Test conditions	Power supplies at 3.3 V (Typical) ¹				Units
Over Drive Run	- CM33 runs at 300 MHz, drive voltage to 1.1 V - CM33 domain bus frequency at 133 MHz - ECC with Cache, TCM, and OCRAM - DCDC, LDO_AON_ANA, and LDO_AON_DIG are turned on 400 MHz, external 24 MHz crystal, and external 32 kHz crystal are enabled - All PLLs are enabled - All peripherals are enabled and run at their maximum clock root frequency under normal drive mode	DCDC_IN	96.5	113.9	130.2	mA
		VDD_AON_IN	34.0	34.5	34.9	mA
		VDD_BBSM_IN	4.4	8.8	15.0	μA
		Total	430.665	489.749	544.880	mW

Table continues on the next page...

Table 13. Typical power modes current and power consumption (Single core) ...continued

Modes	Test conditions	Power supplies at 3.3 V (Typical) ¹				Units
Normal Drive Run	- CM33 runs at 240 MHz, drive voltage to 1.0 V - CM33 domain bus frequency at 133 MHz - ECC with Cache, TCM, and OCRAM - DCDC, LDO_AON_ANA, and LDO_AON_DIG are turned on 400 MHz, external 24 MHz crystal, and external 32 kHz crystal are enabled - All PLLs are enabled - All peripherals are enabled and run at their maximum clock root frequency under normal drive mode	DCDC_IN	72.1	82.8	92.9	mA
		VDD_AON_IN	29	29.8	30.4	mA
		VDD_BBSM_IN	4.2	9.3	15.9	μA
		Total	333.644	371.611	406.942	mW
Under Drive Run	- CM33 runs at 100 MHz, lower voltage to 0.9 V - CM33 domain bus frequency at 50 MHz - ECC with Cache, TCM, and OCRAM - DCDC, LDO_AON_ANA, and LDO_AON_DIG are turned on 400 MHz, external 24 MHz crystal, and external 32 kHz crystal are enabled - All PLLs are enabled - All peripherals are enabled and run at their maximum clock root frequency under underdrive mode	DCDC_IN	45.2	52.7	60.1	mA
		VDD_AON_IN	29	29.7	30.4	mA
		VDD_BBSM_IN	4.1	9.3	15.4	μA
		Total	244.874	271.951	298.701	mW
Normal Drive Wait	- CM33 is on WAIT mode, drive voltage to 1.0 V - CM33 domain bus frequency at 133 MHz - ECC with TCM and OCRAM - DCDC, LDO_AON_ANA, and LDO_AON_DIG are turned on	DCDC_IN	68.9	78.6	88.5	mA
		VDD_AON_IN	29	29.8	30.4	mA
		VDD_BBSM_IN	4.1	9.3	15.7	μA
		Total	323.084	357.751	392.422	mW

Table continues on the next page...

Table 13. Typical power modes current and power consumption (Single core) ...continued

Modes	Test conditions	Power supplies at 3.3 V (Typical) ¹				Units
	400 MHz, external 24 MHz crystal, and external 32 kHz crystal are enabled - All PLLs are enabled - All peripherals are enabled and run at their maximum clock root frequency under normal drive mode					
System Sleep Stop	- System is on Sleep mode - CM33 is on STOP mode, lower voltage to 0.8 V - TCM and OCRM with ECC is on retention - DCDC, LDO_AON_ANA, and LDO_AON_DIG are turned on - All clock sources are turned off except 32 kHz RTC - All PLLs are power gated - The MEGAMIX domain and NETCMIX domain are power gated - All peripherals in both AONMIX domain and WAKEUPMIX domain are clock gated, but remain powered	DCDC_IN	0.329	2.6	5	mA
		VDD_AON_IN	211.1	351.2	446.8	μA
		VDD_BBSM_IN	4.1	8.7	14.1	μA
		Total	1.796	9.768	18.021	mW
Battery Mode	- Only BBSM domain is powered 32 kHz RTC is alive - DCDC_IN and VDD_AON_IN are power gated	DCDC_IN	0	0	0	μA
		VDD_AON_IN	0	0	0	μA
		VDD_BBSM_IN	4.1	8.4	13.6	μA
		Total	13.53	27.72	44.88	μW

1. Code runs in the ITCM; typical values are the average values on typical process wafers.

Table 14 lists the typical wakeup time.

Table 14. Typical wakeup time

Description	Typical wakeup time	Unit
From Battery Mode to ROM exit	34.64	ms

Table continues on the next page...

Table 14. Typical wakeup time ...continued

Description	Typical wakeup time	Unit
From System Sleep Suspend to Over Drive Run	13.29	ms
From System Sleep Stop to Over Drive Run	10.76	ms
From Normal Drive Wait to Normal Drive Run	6.2	μs

4.2 System power and clocks

This section provides the information about the system power and clocks.

4.2.1 Power supplies requirements and restrictions

The system design must comply with power-up sequence, power-down sequence, and steady state guidelines as described in this section to guarantee the reliable operation of the device. Any deviation from these sequences may result in the following situations:

- Excessive current during power-up phase
- Prevention of the device from booting
- Irreversible damage to the processor (worst-case scenario)

Figure 5 shows the power sequence.

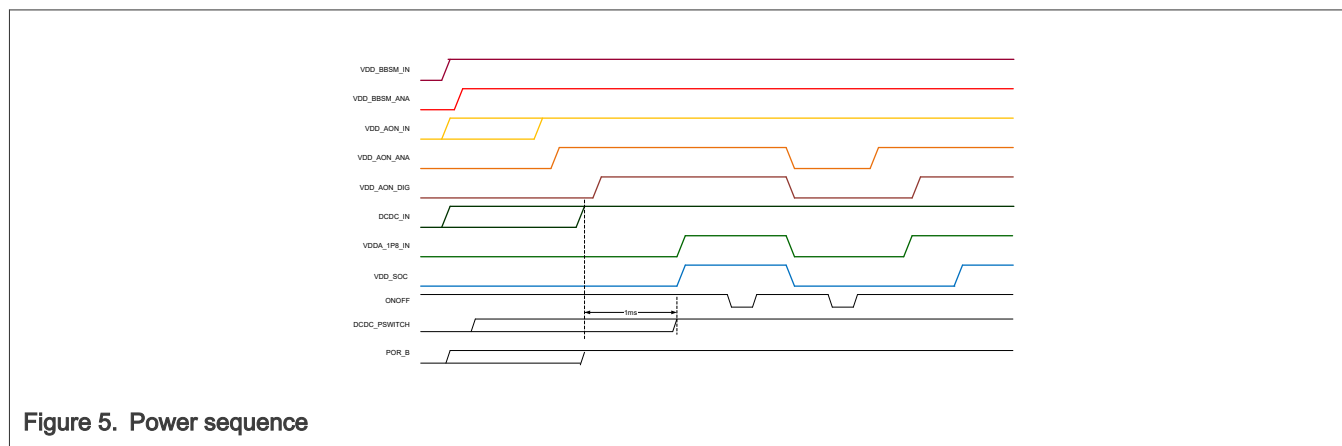


Figure 5. Power sequence

4.2.1.1 Power-up sequence

The below restrictions must be followed:

- VDD_BBSM_IN supply must be turned on before any other power supply or be connected (shorted) with VDD_AON_IN and DCDC_IN supply.
- If a coin cell is used to power VDD_BBSM_IN, then ensure that it is connected before any other supply is switched on.
- An RC delay circuit is recommended for providing the delay between DCDC_IN stable and DCDC_PSWITCH. The total RC delay should be 5 – 40 ms.
- DCDC_IN must reach a minimum 3.0 V within $0.3 \times RC$.
- Delay from DCDC_IN stable at 3.0 V min to DCDC_PSWITCH reaching $0.5 \times DCDC_IN$ (1.5 V) must be at least 1 ms.
- Power up slew rate specification for other power domains is 360 V/s – 36 KV/s.

NOTE

If expect to release MCU by POR_B signal, the POR_B input must be immediately asserted at power-up and remain asserted until the last power rail reaches its working voltage. In the absence of an external reset feeding the POR_B input, the internal POR module takes control. See the *i.MX RT1180 Reference Manual* (IMXRT1180RM) for further details and to ensure that all necessary requirements are being met.

NOTE

The voltage on DCDC_PSWITCH pin should be below 0.5 V before ramping up the voltage on DCDC_PSWITCH.

NOTE

Ensure there is no back voltage (leakage) from any supply on the board towards the 3.3 V supply (for example, from the external components that use both the 1.8 V and 3.3 V supplies).

NOTE

Ensure VDDA_ADC_1P8 is powered prior to VDDA_ADC_3P3.

NOTE

USB1_VBUS, USB2_VBUS, and VDDA_ADC_3P3 are not part of the power supply sequence and may be powered at any time.

NOTE

Ensure VDD_AON_DIG is powered up prior to VDD_SOC_IN.

4.2.1.2 Power-down sequence

The following restrictions must be followed:

- VDD_BBSM_IN supply must be turned off after any other power supply, or be connected (shorted) with VDD_AON_IN and DCDC_IN supply.
- If a coin cell is used to power VDD_BBSM_IN, then ensure that it is removed after any other supply is switched off.

NOTE

Ensure VDD_AON_DIG is powered down after VDD_SOC_IN.

4.2.1.3 Power supplies usage

I/O pins should not be externally driven while the I/O power supply for the pin (NVCC_xxx) is OFF. This can cause internal latch-up and malfunctions due to reverse current flows. For information about I/O power supply of each pin, see "Power Rail" columns in pin list tables of [Package information and contact assignments](#).

4.2.2 Internal POR and power detect

Internal detector monitors VDD_SOC. Internal POR will be asserted whenever VDD_SOC is lower.

Table 15. Internal POR and power detect

Symbol	Description	Value	Unit
$V_{\text{detsoc1p0_H}}$	1.0 V supply valid	0.75	V
$\text{Hyst}_{\text{det1p0}}$	The detector hysteresis	100	mV

4.2.3 Integrated LDO voltage regulator parameters

Various internal supplies can be powered from internal LDO voltage regulators. The on-chip LDOs are intended for internal use only and should not be used to power any external circuitry. See the *i.MX RT1180 Reference Manual* (IMXRT1180RM) for details on the power tree scheme.

4.2.3.1 LDO_BBSM_ANA

Table 16 shows the parameters of LDO_BBSM_ANA.

Table 16. LDO_BBSM_ANA specifications

Specification	Min	Typ	Max	Unit
VDD_BBSM_IN	2.4	3	3.6	V
VDD_BBSM_ANA	1.65	1.75	1.95	V
I _{out}	—	—	1	mA
External decoupling capacitor	—	2.2	—	μF

4.2.3.2 LDO_PLL

Table 17 shows the parameters of LDO_PLL.

Table 17. LDO_PLL specifications

Specification	Min	Typ	Max	Unit
VDDA_1P8_IN	1.71	1.8	1.89	V
VDDA_1P0	0.9	1	1.2	V
I _{out}	—	—	70	mA
External decoupling capacitor	—	2.2	—	μF

4.2.3.3 LDO_AON_DIG

LDO_AON_DIG provides 1.0 V power source from 1.8 V power domain (VDD_AON_ANA). The trim voltage range of LDO output is from 0.7 V to 1.15 V. There are two work modes: Low Power mode and High Power mode. In typical PVT case, the static current consumption is less than 3 μA in Low Power mode. The maximum drive strength of this LDO regulator is 50 mA in High Power mode.

Table 18. LDO_AON_DIG specifications

Specification	Min	Typ	Max	Unit
VDD_AON_ANA	1.71	1.8	1.89	V
VDD_AON_DIG	0.7	1	1.15	V
I _{out} : low power mode	—	—	1.5	mA
I _{out} : high power mode	—	—	50	mA

Table continues on the next page...

Table 18. LDO_AON_DIG specifications ...continued

Specification	Min	Typ	Max	Unit
External decoupling capacitor	—	2.2	—	μF

4.2.3.4 LDO_AON_ANA

LDO_AON_ANA provides 1.8 V power source from 3.3 V power domain. Its default output value is 1.8 V, and can be trimmed with 50 mV step, but it is recommended to only use the default value 000 in real application. Two work modes are supported by this LDO: Low Power mode and High Power mode. In Low Power mode, the LDO provides 3 mA (maximum value) by consuming only 4 μA current. In High Power mode, the LDO provides 75 mA current capacity with 40 μA static power dissipation.

Table 19. LDO_AON_ANA specification

Specification	Min	Typ	Max	Unit
VDD_AON_IN	3	3.3	3.6	V
VDD_AON_ANA	—	1.8	—	V
I _{out} : low power mode	—	—	3	mA
I _{out} : high power mode	—	—	75	mA
External decoupling capacitor	—	4.7	—	μF

4.2.4 DCDC

DCDC can be configured to operate on power-save mode when the load current is less than 50 mA. During the power-save mode, the converter operates with reduced switching frequency in PFM mode and with a minimum quiescent current to maintain high efficiency.

DCDC can detect the peak current in the P-channel switch. When the peak current exceeds the threshold, DCDC will give an alert signal, and the threshold can be configured. By this way, DCDC can roughly detect the current loading.

DCDC also includes the following protection functions:

- Over current protection. In run mode, DCDC shuts down when detecting abnormal large current in the P-type power switch.
- Over voltage protection. DCDC shuts down when detecting the output voltage is too high.
- Low voltage detection. DCDC shuts down when detecting the input voltage is too low.
- Low voltage warning. DCDC gives an alert signal, and triggers the interrupt if enabled when detecting the input voltage is lower than the threshold.

Table 20 shows DCDC characteristics.

Table 20. DCDC characteristics¹

Description	Min	Typ	Max	Unit	Comments
Input voltage	3.0	3.3	3.6	V	—
Output voltage					
• 1.0 V output	0.6	1	1.375	V	25 mV one step

Table continues on the next page...

Table 20. DCDC characteristics^{1...continued}

Description	Min	Typ	Max	Unit	Comments
• 1.8 V output ²	1.71	1.8	1.89	V	25 mV one step
Loading					
• 1.0 V output	—	150	1000	mA	—
• 1.8 V output	0.1 ²	100	150	mA	—
Efficiency					
• DCDC run mode	—	80%	—	—	150 mA@vdd1p0
• DCDC low power mode	—	80%	—	—	300 μ A@vdd1p0
Output voltage accuracy ³					
• DCDC Run mode	-2%	—	2%	—	—
• DCDC Low power mode	-6%	—	6%	—	—
Over current detection	—	2	—	A	—
Over voltage detection					
• Output 1.8 V	—	2.5	—	V	—
• Output 1.0 V	—	1.5	—	V	—
Low DCDC_IN detection	—	2.6	—	V	—
Low DCDC_IN warning	—	2.8	—	V	—
Leakage current	—	1	—	μ A	DCDC off
Quiescent current					
• DCDC Run mode	—	375	—	μ A	—
• DCDC Low power mode	—	80	—	μ A	—
Capacitor value on 1.0 V output	—	33	—	μ F	High frequency capacitor are also need in paralleled
Capacitor value on 1.8 V output	—	10	—	μ F	15 μ F can get better ripple
Inductor value	—	4.7	—	μ H	—
• Saturation current	—	2	—	A	—

1. Values in this table are based on CZ test with limited matrix samples in lab environment.

2. This output voltage are measured on bench with more than 0.1 mA loading on 1.8V output. In DCDC normal mode, ignore the 0.1 mA limitation. In DCDC low power mode, when loading less than 0.1 mA, set the bit DCDC_1P8 stability in register DCDC Control Register 0.
3. Accuracy is only measured on bench with matrix samples under full operating ranges of voltage, loading, and temperature.

For additional information, see the *i.MX RT1180 Reference Manual* (IMXRT1180RM).

4.2.5 PLL's electrical characteristics

4.2.5.1 Audio PLL's electrical parameters

Table 21. Audio PLL's electrical parameters

Parameter	Min	Typ	Max	Unit
Clock output range ¹	650	—	786.43	MHz
Reference clock	—	24	—	MHz
Lock time	—	—	11250	reference cycles
Period jitter (p2p)	—	50	—	ps
Duty cycle	48.5	—	51.5	%

1. In UD mode, the maximum frequency of output clock cannot exceed 480 MHz.

4.2.5.2 528 MHz PLL (SYS_PLL2)

Table 22. 528 MHz PLL's electrical parameters

Parameter	Min	Typ	Max	Unit
Clock output range ¹	—	—	528	MHz
Reference clock	—	24	—	MHz
Lock time	—	—	11250	reference cycles
Period jitter (p2p)	—	50	—	ps
PFD period jitter (p2p)	—	100	—	ps
Duty cycle	45	—	55	%

1. In UD mode, the maximum frequency of output clock cannot exceed 480 MHz.

4.2.5.3 Ethernet PLL (SYS_PLL1)

Table 23. Ethernet PLL's electrical parameters

Parameter	Min	Typ	Max	Unit
Clock output range ¹	—	—	1000	MHz

Table continues on the next page...

Table 23. Ethernet PLL's electrical parameters ...continued

Parameter	Min	Typ	Max	Unit
Reference clock	—	24	—	MHz
Lock time	—	—	11250	reference cycles
Period jitter (p2p)	—	50	—	ps
Duty cycle	47.5	—	52.5	%

1. In UD mode, the maximum frequency of output clock cannot exceed 480 MHz.

4.2.5.4 480 MHz PLL (SYS_PLL3)

Table 24. 480 MHz PLL's electrical parameters

Parameter	Min	Typ	Max	Unit
Clock output range ¹	—	—	480	MHz
Reference clock	—	24	—	MHz
Lock time	—	—	383	reference cycles
Period jitter (p2p)	—	40	—	ps
PFD period jitter (p2p)	—	125	—	ps
Duty cycle	45	—	55	%

1. In UD mode, the maximum frequency of output clock cannot exceed 480 MHz.

4.2.5.5 Arm PLL

Table 25. Arm PLL's electrical parameters

Parameter	Min	Typ	Max	Unit
Clock output range ¹	156	—	798	MHz
Reference clock	—	24	—	MHz
Lock time	—	—	2250	reference cycles
Period jitter (p2p)	—	15	—	ps
Duty cycle	45	—	55	%

1. In UD mode, the maximum frequency of output clock cannot exceed 480 MHz.

4.2.6 On-chip oscillators

Each i.MX RT1180 processor has two external input clocks: a low frequency (RTC_XTALI) and a high frequency (XTALI).

The RTC_XTALI is used for low-frequency functions. It supplies the clock for wake-up circuit, real time clock operation, and slow system and watchdog counters. The clock input can be connected to either external oscillator or a crystal using internal oscillator

amplifier. Additionally, there is an internal ring oscillator, which can be used instead of the clock source from RTC_XTALI. The internal ring oscillator does not provide an accurate frequency and is affected by process, voltage, and temperature variations. NXP recommends using an external crystal as the clock source for RTC_XTALI. If the internal clock oscillator is used instead, careful consideration should be given to the timing implications on all of the SoC modules dependent on this clock.

The system clock input XTALI is used to generate the main system clock. It supplies the PLLs and other peripherals. The system clock input can be connected to either external oscillator or a crystal using internal oscillator amplifier.

The RTC OSC module provides the clock source for the Real-Time Clock module. The RTC OSC module, in conjunction with an external crystal, generates a 32.768 kHz reference clock for the RTC.

The system oscillator (SYS OSC) is a crystal oscillator. The SYS OSC, in conjunction with an external crystal or resonator, generates a reference clock for this chip.

Table 26. 24 MHz system oscillator specifications

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
I_{VDDA} (Low power mode)	Analog supply current	24 MHz	—	0.5	—	mA
I_{VDDA} (High gain mode)	Analog supply current	24 MHz	—	1.3	—	mA
R_F	Feedback resistor	Low-power mode	No need			
		High-gain mode	—	1	—	MΩ
R_S	Series resistor ¹	—	—	0	—	kΩ
$C_X C_Y$	XTALI/XTALO load capacitance	See crystal or resonator manufacture's recommendation				
C_{para}	Parasitically capacitance of XTALI and XTALO	—	—	1.5	2.0	pF
Clock output						
F_{OSC}	Oscillator crystal or resonator frequency	—	—	24	—	MHz
t_{dcy}	Duty-cycle of the output clock	—	40	50	60	%
Dynamic parameters						
V_{PP}	Peak-peak amplitude of oscillation	Low-power mode	—	0.8	—	V
		High gain mode	0.75 x $V_{DD_A_ON_AN_A}$	0.8 x $V_{DD_A_ON_AN_A}$	—	V
t_{start}	Start-up time from OSC_24M_CNTL[OSC_EN] set to oscillator stable ²	24 MHz low-power mode	—	250	—	μs
		24 MHz high-gain mode	—	250	—	μs

1. Depends on the drive level of external crystal device

2. Oscillator hardware default is OFF at power-up, so requires firmware or software to enable.

Table 27. 32 kHz oscillator specifications

Symbol	Description	Min	Typ	Max	Unit	Note
C _{para}	Parasitically capacitance of RTC_XTALI and RTC_XTALO	—	1.5	2.0	pF	—
V _{pp}	Peak-to-peak amplitude of oscillator	—	0.6	—	V	
f _{osc_lo}	Oscillator crystal	—	32.768	—	kHz	—
t _{start}	Crystal startup time from VDD_BBSM_ANA ramp-up to minimum operating voltage to oscillator stable	—	500	—	ms	¹
V _{ec_extal32}	Externally provided input clock amplitude	0.7	—	VDD_BBSM_ANA	V	^{2,3}

1. Proper PCB layout procedures must be followed to achieve specifications.
2. This specification is for an externally supplied clock driven to RTC_XTALI and does not apply to any other clock input. The oscillator remains enabled and RTC_XTALO must be left unconnected.
3. The parameter specified is a peak-to-peak value and V_{IH} and V_{IL} specifications do not apply. The voltage of the applied clock must be within the range of V_{SS} to VDD_BBSM_ANA.

Table 28. RC oscillator with 24 MHz internal reference frequency

Symbol	Parameter	Condition	Min	Typ	Max	Unit
General						
I _{VDDA}	Analog supply current	—	—	350	500	μA
Clock output						
F _{clkout}	Clock frequency	—	—	24	—	MHz
Dynamic parameters						
T _{start}	Start-up time from VDD_AON_ANA ramp-up to minimum operating voltage to oscillator stable	—	—	2.5	—	μs
Accuracy						
T _{target}	Trimmed	—	-2	—	2	%

Table 29. RC oscillator with 400 MHz internal reference frequency

Symbol	Parameter	Condition	Min	Typ	Max	Unit
General						
I _{VDD_1P8V_ON}	Analog supply current	—	—	60	—	μA

Table continues on the next page...

Table 29. RC oscillator with 400 MHz internal reference frequency ...continued

Symbol	Parameter	Condition	Min	Typ	Max	Unit
I_{VDD_ON}	Digital supply current	—	—	80	—	μA
Clock output						
F_{tuned}	Tuned clock frequency	—	—	400	—	MHz
$\Delta F/F$	Frequency error after tuning	—	—	0.1	—	%
Dynamic parameters						
J_{PP-CC}	Peak-peak, period jitter	—	—	50	—	ps
t_{start}	Start-up time from OSC_400M_CTRL1[PWD] is cleared to oscillator stable ¹	—	—	1	—	μs
t_{tune}	Tuning time	—	1	—	256	μs

1. Oscillator hardware default is OFF at power-up, so requires firmware or software to enable.

Table 30. RC oscillator with 32 kHz internal reference frequency

Symbol	Description	Min	Typ	Max	Unit	Note
f_{irc32k}	Internal reference frequency	—	32	—	kHz	—
Δf_{irc32k}	Deviation of IRC32K frequency	-25%	—	25%	f_{irc32k}	—

4.3 I/O parameters

This section provides parameters on I/O interfaces.


4.3.1 I/O DC parameters

This section includes the DC parameters of the following I/O types:

- XTALI and RTC_XTALI (Clock Inputs) DC Parameters
- General Purpose I/O (GPIO)

NOTE

The term 'NVCC_XXXX' in this section refers to the associated supply rail of an input or output.

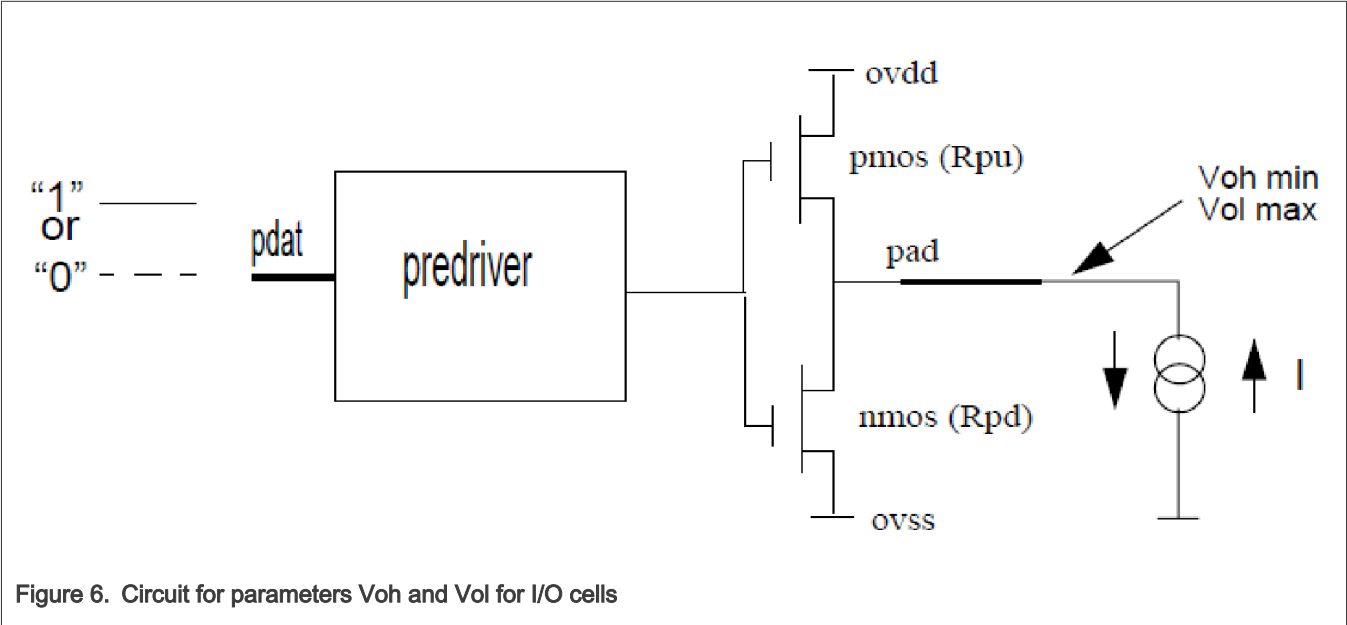

4.3.1.1 XTALI and RTC_XTALI (clock inputs) DC parameters

Table 31 shows the DC parameters for the clock inputs.

Table 31. XTALI and RTC_XTALI DC parameters¹

Parameter	Symbol	Test Conditions	Min	Max	Unit
XTALI high-level DC input voltage	Vih	—	VDD_AON_ANA - 0.5	VDD_AON_ANA	V
XTALI low-level DC input voltage	Vil	—	0	0.5	V
RTC_XTALI high-level DC input voltage	Vih	—	VDD_BBSM_ANA - 0.5	VDD_BBSM_ANA	V
RTC_XTALI low-level DC input voltage	Vil	—	0	0.5	V

1. The DC parameters are for external clock input only.

4.3.1.2 General purpose I/O (GPIO) DC parameters

Following section introduces the GPIO DC parameters, respectively, for GPIO pads. These parameters are guaranteed per the operating ranges in Table 10 unless otherwise noted.

Table 32. DC specification for GPIO_EMC_B1/GPIO_EMC_B2/GPIO_B1/GPIO_B2/GPIO_SD1/GPIO_SD2 bank

Parameter	Symbol	Value			Unit	Condition
		Min	Typ	Max		
Receiver 3.3 V						
High level input voltage	V _{IH}	0.625 x NVCC	—	NVCC + 0.3	V	—
Low level input voltage	V _{IL}	-0.3	—	0.25 x NVCC	V	—

Table continues on the next page...

Table 32. DC specification for GPIO_EMC_B1/GPIO_EMC_B2/GPIO_B1/GPIO_B2/GPIO_SD1/GPIO_SD2 bank ...continued

Parameter	Symbol	Value			Unit	Condition
		Min	Typ	Max		
Receiver 1.8 V						
High level input voltage	V _{IH}	0.65 x NVCC	—	NVCC + 0.3	V	—
Low level input voltage	V _{IL}	-0.3	—	0.35 x NVCC	V	—
Driver 3.3 V and driver 1.8 V for PDRV = L and PDRV = H						
Output high current	I _{OH}	-6	—	—	mA	V _{OH} = 0.8 x NVCC
Output low current	I _{OL}	6	—	—	mA	V _{OL} = 0.2 x NVCC
Output low/high current total for each IO bank	I _{OCT}	—	—	100	mA	—
Weak pull-up and pull-down						
Pull-up / pull-down resistance	R _{High}	10	—	100	kΩ	High voltage range (2.7 V - 3.6 V)
Pull-up / pull-down resistance	R _{Low}	20	—	50	kΩ	Low voltage range (1.65 V - 1.95 V)

Table 33. DC specifications for GPIO_AD/GPIO_AON bank

NO.	Characteristics	Test Conditions	Min	Max	Units
1	NVCC	Continuous range mode	1.71	1.98	V
			3.0	3.5	
		Low range mode	1.71	1.98	V
		High range mode	3	3.5	V
2	High-level input voltage (V_{IH})	Continuous range mode (1.71 to 1.98 V)	$0.8 \times NVCC$	NVCC	V
		Continuous range mode (3.0 to 3.5 V)	$0.7 \times NVCC$	NVCC	V
		Low range mode	$0.8 \times NVCC$	NVCC	V
		High range mode	$0.7 \times NVCC$	NVCC	V
3	Low-level input voltage (V_{IL})	Continuous range mode (1.71 to 1.98 V)	0	$0.25 \times NVCC$	V
		Continuous range mode	0	$0.2 \times NVCC$	V

Table continues on the next page...

Table 33. DC specifications for GPIO_AD/GPIO_AON bank ...continued

NO.	Characteristics	Test Conditions	Min	Max	Units
		(3.0 to 3.5 V)			
		Low range mode	0	0.3 x NVCC	V
		High range mode	0	0.2 x NVCC	V
4	Input Hysteresis (VHYSN)	All voltage range	0.06 x NVCC	—	V
5	Output high voltage (V_{OH}) DSE = 1	Continuous range mode $I_{OH} = -10$ mA	NVCC - 0.5	—	V
		Low range mode $I_{OH} = -10$ mA	NVCC - 0.5	—	V
		High range mode $I_{OH} = -9$ mA	NVCC - 0.5	—	V
6	Output high voltage (V_{OH}) DSE = 0	Continuous range mode $I_{OH} = -5$ mA	NVCC - 0.5	—	V
		Low range mode $I_{OH} = -5$ mA	NVCC - 0.5	—	V
		High range mode $I_{OH} = -4.5$ mA	NVCC - 0.5	—	V
7	Output low voltage (V_{OL}) DSE = 1	Continuous range mode $I_{OL} = 10$ mA	—	0.5	V
		Low range mode $I_{OL} = 10$ mA	—	0.5	V
		High range mode $I_{OL} = 10$ mA	—	0.5	V
8	Output low voltage (V_{OL}) DSE = 0	Continuous range mode $I_{OL} = 5$ mA	—	0.5	V
		Low range mode $I_{OL} = 5$ mA	—	0.5	V
		High range mode $I_{OL} = 5$ mA	—	0.5	V
11	Pull-up resistor range (R_{PU})	All voltage range	25	50	k Ω

Table continues on the next page...

Table 33. DC specifications for GPIO_AD/GPIO_AON bank ...continued

NO.	Characteristics	Test Conditions	Min	Max	Units
	Measure @V _{DD}				
12	Pull-down resistor range (R _{PD}) Measure @V _{SS}	All voltage range	25	50	kΩ
13	Input leakage current	All voltage range	—	1	μA
14	Output capacitance (CL)	All voltage range	—	15	pF
15	Input capacitance (C _{in})	All voltage range	—	5	pF
16	Output low/high current total for each IO bank (I _{OUT})	All voltage range	—	100	mA

NOTE


To select Continuous range mode / Low range mode / High range mode, refer to MISC_IO_CTRL register of BLK_CTRL_WAKEUP in RM for GPIO_AD bank and MISC_IO_CTRL register of BLK_CTRL_NS_AON in RM for GPIO_AON bank.

Table 34. Additional leakage parameters

Parameter	Symbol	Pins	Min	Max	Unit
High level input current	IIH	GPIO_AON_15	—	1	μA
		GPIO_AON_20	—	1	
		GPIO_AD_19	—	1	
		GPIO_AD_35	—	1	

4.3.2 I/O AC parameters

The GPIO and DDR I/O load circuit and output transition time waveform are shown in [Figure 7](#) and [Figure 8](#).

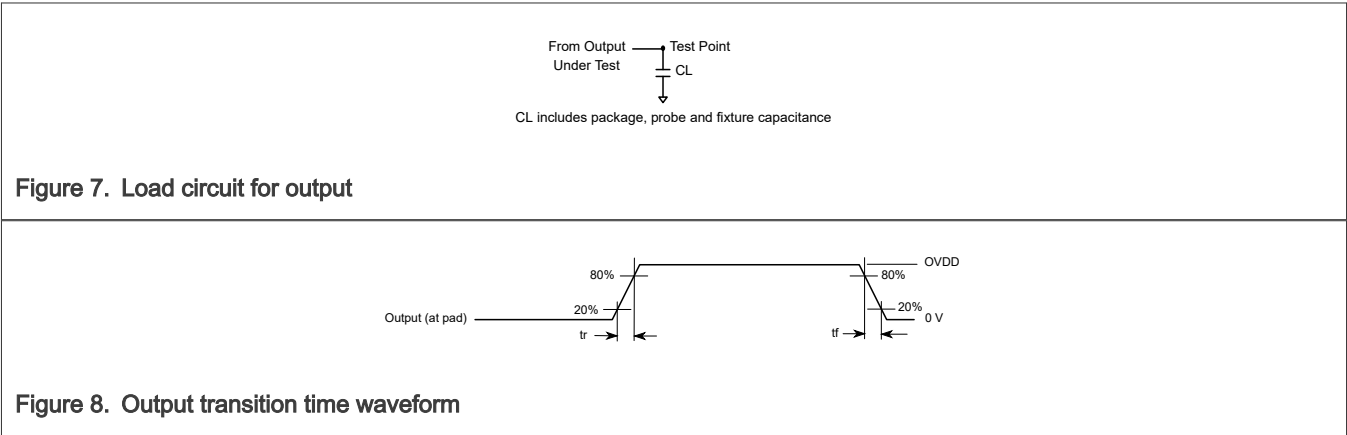

4.3.2.1 General purpose I/O (GPIO) AC parameters

The I/O AC parameters for GPIO are presented in the [Table 35](#), [Table 36](#), and [Table 37](#) respectively.

Table 35. AC specification for GPIO_EMC_B1/GPIO_EMC_B2/GPIO_B1/GPIO_B2/GPIO_SD1/GPIO_SD2 bank

Symbol	Parameter	Test Condition	Min	Typ	Max	Unit
Driver 1.8 V application						
$f_{\max}$	Maximum frequency	Load = 21 pF (PDRV = L, high drive, 33 Ω)	—	—	208	MHz
		Load = 15 pF (PDRV = H, low drive, 50 Ω)				
t_r	Rise time	Measured between V_{OL} and V_{OH}	0.4	—	1.32	ns
t_f	Fall time	Measured between V_{OH} and V_{OL}	0.4	—	1.32	ns
Driver 3.3 V application						
$f_{\max}$	Maximum frequency	Load = 20 pF	—	—	200	MHz
t_r	Rise time	Measured between V_{OL} and V_{OH}	—	—	1.7	ns
t_f	Fall time	Measured between V_{OH} and V_{OL}	—	—	—	ns

Table 36. Dynamic input characteristics for GPIO_EMC_B1/GPIO_EMC_B2/GPIO_B1/GPIO_B2/GPIO_SD1/GPIO_SD2

Symbol	Parameter	Test Condition ^{1, 2}	Min	Max	Unit
Dynamic Input Characteristics for 3.3 V Application					
f_{op}	Input frequency of operation	—	—	200	MHz
Dynamic Input Characteristics for 1.8 V Application					
f_{op}	Input frequency of operation	—	—	208	MHz

1. For all supply ranges of operation.

2. The dynamic input characteristic specifications are applicable for the digital bidirectional cells.

Table 37. AC specifications for GPIO_AD/GPIO_AON bank

NO.	Characteristic	Condition		Max	Unit
1	$f_{\max}$	Cload = 15 pF	—	104	MHz
2	Vpeak on pad	—	—	3.85	V
3	Pad rise/fall time (DSE = 0, SRE = 0)	Continuous range mode (Cload = 15 pF)	—	3	ns
		Low range mode	—	3	ns

Table continues on the next page...

Table 37. AC specifications for GPIO_AD/GPIO_AON bank ...continued

NO.	Characteristic	Condition		Max	Unit
		(Cload = 15 pF)			
		High range mode (Cload = 15 pF)	—	6	ns
4	Pad rise/fall time (DSE = 0, SRE = 1)	Continuous range mode (Cload = 15 pF)	—	7.5	ns
		Low range mode (Cload = 15 pF)	—	6	ns
		High range mode (Cload = 15 pF)	—	12	ns
5	Pad rise/fall time (DSE = 1, SRE = 0)	Continuous range mode (Cload = 15 pF)	—	2.5	ns
		Low range mode (Cload = 15 pF)	—	2.5	ns
		High range mode (Cload = 15 pF)	—	5	ns
6	Pad rise/fall time (DSE = 1, SRE = 1)	Continuous range mode (Cload = 15 pF)	—	5	ns
		Low range mode (Cload = 15 pF)	—	5	ns
		High range mode (Cload = 15 pF)	—	10	ns

NOTE

In 3.3V mode:

If the IO toggling frequency is higher than or equal to 25MHz, must use continuous range mode.

If the IO toggling frequency is lower than 25MHz, it is recommended to use high range mode for better power consumption.

In 1.8V mode:

It is recommended to use low range mode for better power consumption and better performance.

NOTE

To select Continuous range mode / Low range mode / High range mode, refer to MISC_IO_CTRL register of BLK_CTRL_WAKEUP in RM for GPIO_AD bank and MISC_IO_CTRL register of BLK_CTRL_NS_AON in RM for GPIO_AON bank.

Figure 9 is the GPIO block diagram.

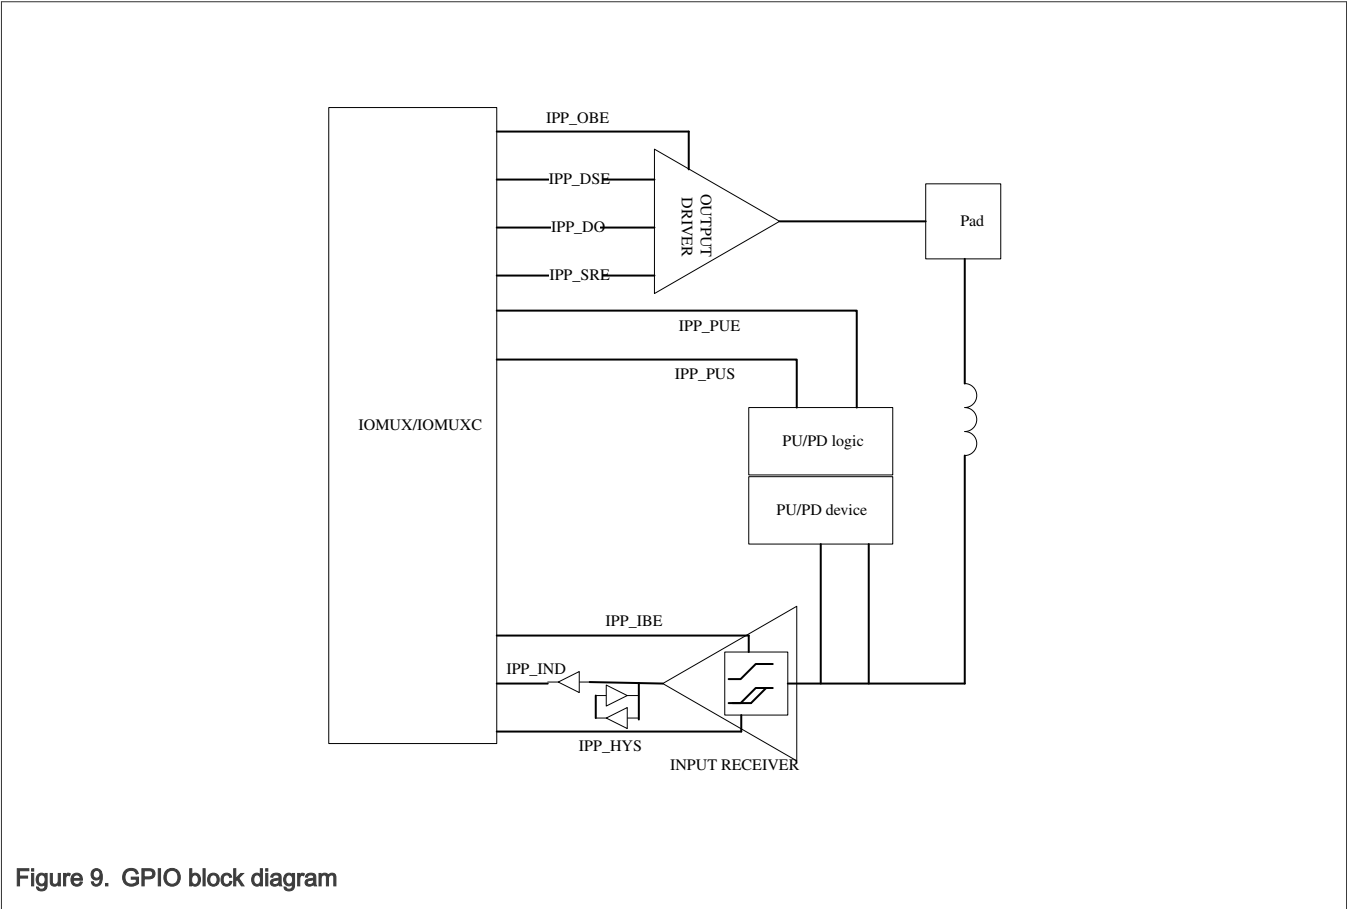


Figure 9. GPIO block diagram

4.4 System modules

This section contains the timing and electrical parameters for the modules in the i.MX RT1180 processor.

4.4.1 Reset timings parameters

Figure 10 shows the reset timing and Table 38 lists the timing parameters.

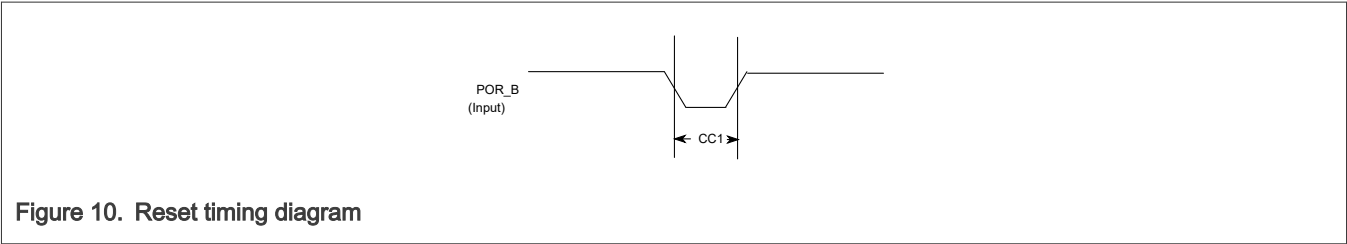


Figure 10. Reset timing diagram

Table 38. Reset timing parameters

ID	Parameter	Min	Max	Unit
CC1	Duration of POR_B to be qualified as valid.	1	—	RTC_XTALI cycle

4.4.2 JTAG Controller timing parameters

Figure 11 depicts the JTAG controller timing. Figure 12 depicts the JTAG TRST_B timing.

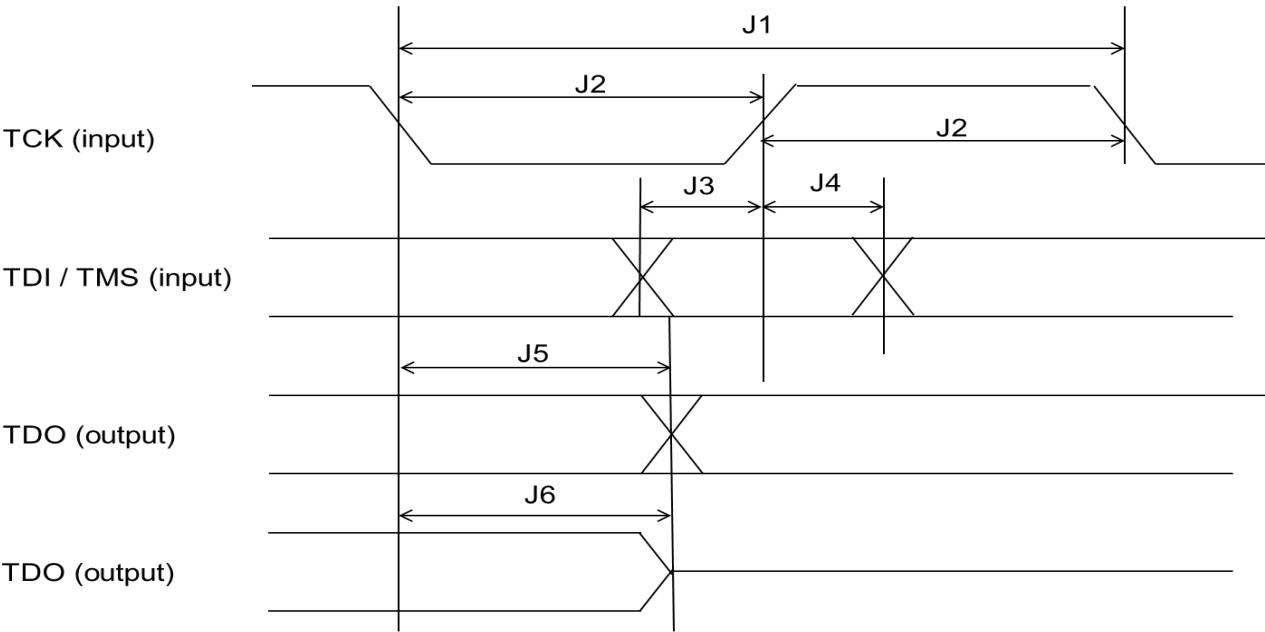


Figure 11. JTAG controller timing

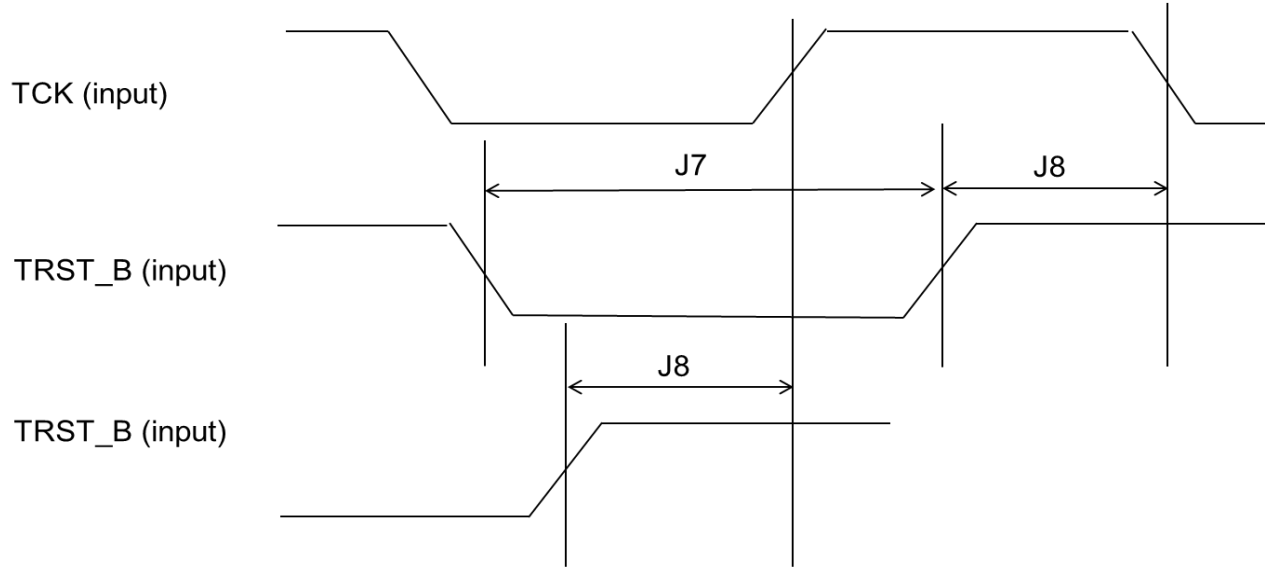


Figure 12. JTAG_TRST_B timing

Table 39. JTAG timing parameters

ID	Parameter	Value		Unit
		Min	Max	
J0	TCK frequency	—	25	MHz
J1	TCK cycle time	40	—	ns
J2	TCK pulse width	20	—	ns
J3	Input data setup time	5	—	ns
J4	Input data hold time	5	—	ns
J5	Output data valid time	—	15.2	ns
J6	Output high impedance time	—	15.2	ns
J7	TRST_B assert time	100	—	ns
J8	TRST_B setup time to TCK edge	18	—	ns

4.4.3 SWD timing parameters

Figure 13 depicts the SWD timing.

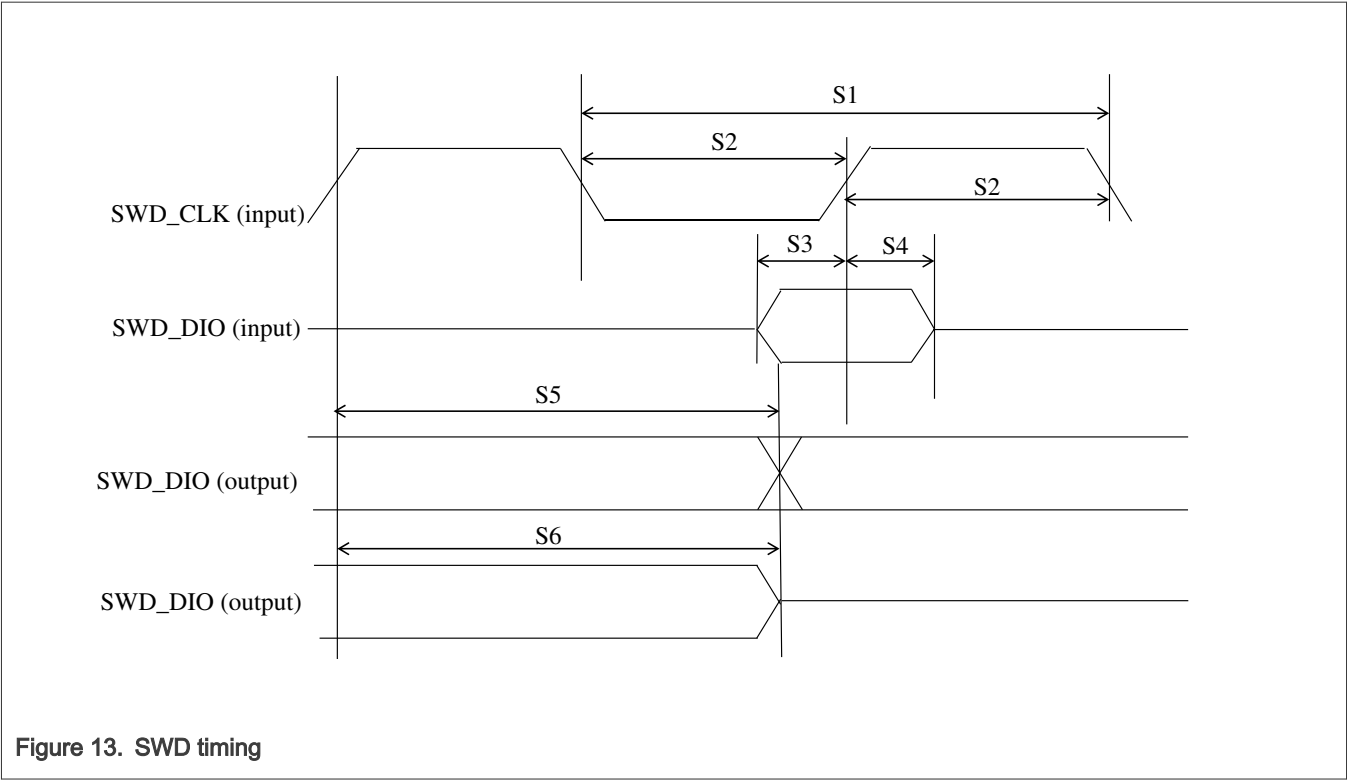


Table 40 shows SWD timing parameters.

Table 40. SWD timing parameters

Symbol	Description	Min	Max	Unit
S0	SWD_CLK frequency	—	50	MHz
S1	SWD_CLK cycle time	20	—	ns
S2	SWD_CLK pulse width	10	—	ns
S3	Input data setup time	5	—	ns
S4	Input data hold time	1	—	ns
S5	Output data valid time	—	14.4	ns
S6	Output high impedance time	—	14.4	ns

4.5 External memory interface

The following sections provide information about external memory interfaces.

4.5.1 SEMC specifications

The following sections provide information on SEMC interface.

Measurements are with a load of 15 pf and an input slew rate of 1 V/ns.

4.5.1.1 SEMC output timing

There are ASYNC and SYNC modes for SEMC output timing.

4.5.1.1.1 SEMC output timing in ASYNC mode


Table 41 shows SEMC output timing in ASYNC mode.

Table 41. SEMC output timing in ASYNC mode

Symbol	Parameter	Min.	Max.	Unit	Comment
	Frequency of operation	—	200	MHz	
T _{CK}	Internal clock period	5	—	ns	
T _{AVO}	Address output valid time	—	2	ns	These timing parameters apply to Address and ADV# for NOR/SRAM in ASYNC mode.
T _{AHO}	Address output hold time	(TCK - 2) ¹	—	ns	
T _{ADVL}	Active low time	(TCK - 1) ²			
T _{DVO}	Data output valid time	—	2	ns	These timing parameters apply to Data/CLE/ALE and WE# for NAND, apply to Data/DM/CRE for NOR/SRAM, apply to Data/DCX and WRX for DBI interface.
T _{DHO}	Data output hold time	(TCK - 2) ³	—	ns	
T _{WEL}	WE# low time	(TCK - 1) ⁴		ns	

1. Address output hold time is configurable by SEMC_*CR0.AH. AH field setting value is 0x0 in above table. When AH is set with value N, T_{AHO} min time should be $((N + 1) \times T_{CK})$. See the *i.MX RT1180 Reference Manual* (IMXRT1180RM) for more detail about SEMC_*CR0.AH register field.
2. ADV# low time is configurable by SEMC_*CR0.AS. AS field setting value is 0x0 in above table. When AS is set with value N, T_{ADL} min time should be $((N + 1) \times T_{CK} - 1)$. See the *i.MX RT1180 Reference Manual* (IMXRT1180RM) for more detail about SEMC_*CR0.AS register field.
3. Data output hold time is configurable by SEMC_*CR0.WEH. WEH field setting value is 0x0 in above table. When WEH is set with value N, T_{DHO} min time should be $((N + 1) \times T_{CK})$. See the *i.MX RT1180 Reference Manual* (IMXRT1180RM) for more detail about SEMC_*CR0.WEH register field.
4. WE# low time is configurable by SEMC_*CR0.WEL. WEL field setting value is 0x0 in above table. When WEL is set with value N, T_{WEL} min time should be $((N + 1) \times T_{CK} - 1)$. See the *i.MX RT1180 Reference Manual* (IMXRT1180RM) for more detail about SEMC_*CR0.WEL register field.

Figure 14 shows the output timing in ASYNC mode.

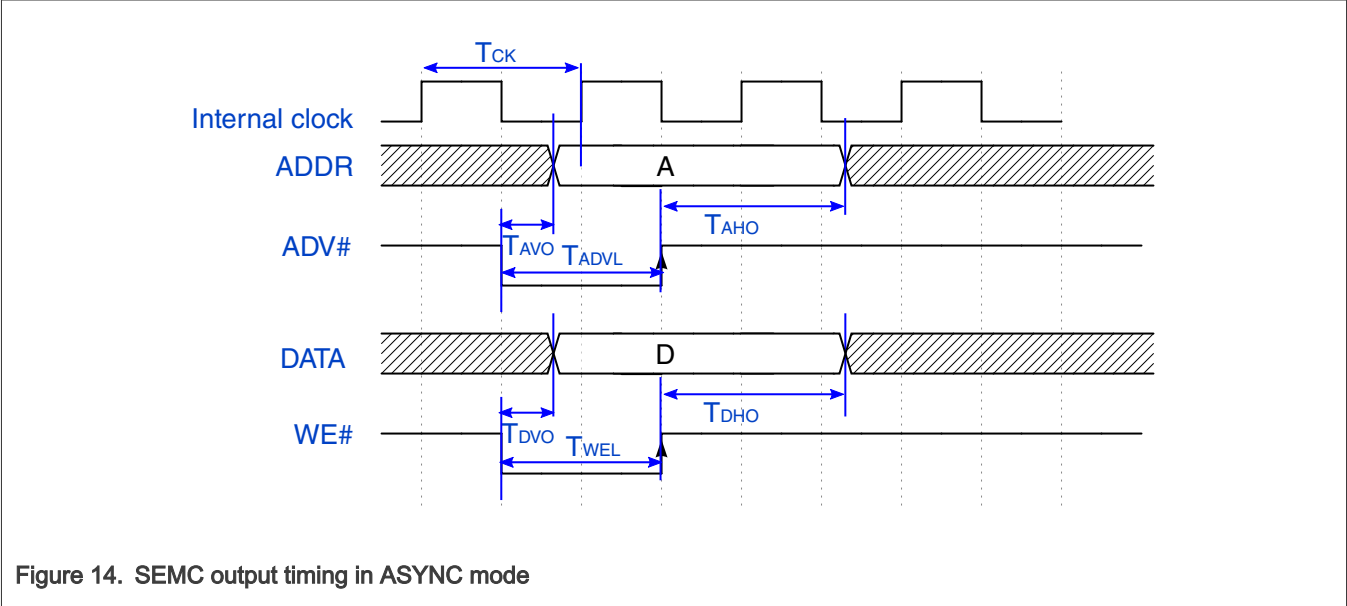

4.5.1.1.2 SEMC output timing in SYNC mode

Table 42 shows SEMC output timing in SYNC mode.

Table 42. SEMC output timing in SYNC mode

Symbol	Parameter	Min.	Max.	Unit	Comment
	Frequency of operation	—	200	MHz	—
T_{CK}	Internal clock period	5	—	ns	—
T_{DVO}	Data output valid time	—	0.6	ns	These timing parameters apply to Address/Data/DM/CKE/control signals with SEMC_CLK for SDRAM.
T_{DHO}	Data output hold time	-0.7	—	ns	

Figure 15 shows the output timing in SYNC mode.




Figure 15. SEMC output timing in SYNC mode

4.5.1.2 SEMC input timing

There are ASYNC and SYNC modes for SEMC input timing.

4.5.1.2.1 SEMC input timing in ASYNC mode

Table 43 shows SEMC input timing in ASYNC mode.

Table 43. SEMC input timing in ASYNC mode

Symbol	Parameter	Min.	Max.	Unit	Comment
T _{IS}	Data input setup	7.1	—	ns	For NAND/NOR/SRAM/DBI, these timing parameters apply to RE# and Read Data.
T _{IH}	Data input hold	0	—	ns	

Figure 16 shows the input timing in ASYNC mode.

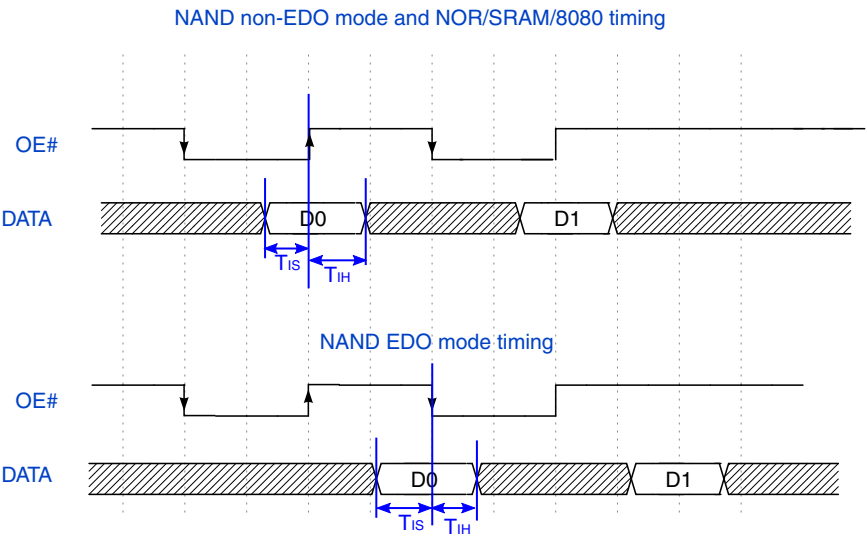


Figure 16. SEMC input timing in ASYNC mode

4.5.1.2.2 SEMC input timing in SYNC mode

Table 44 and Table 45 show SEMC input timing in SYNC mode.


Table 44. SEMC input timing in SYNC mode (SEMC_MCR.DQSMD = 0x0)

Symbol	Parameter	Min.	Max.	Unit	Comment
T_{IS}	Data input setup	8.67	—	ns	—
T_{IH}	Data input hold	0	—	ns	

Table 45. SEMC input timing in SYNC mode (SEMC_MCR.DQSMD = 0x1)

Symbol	Parameter	Min.	Max.	Unit	Comment
T_{IS}	Data input setup	0.6	—	ns	—
T_{IH}	Data input hold	1	—	ns	

Figure 17 shows the input timing in SYNC mode.

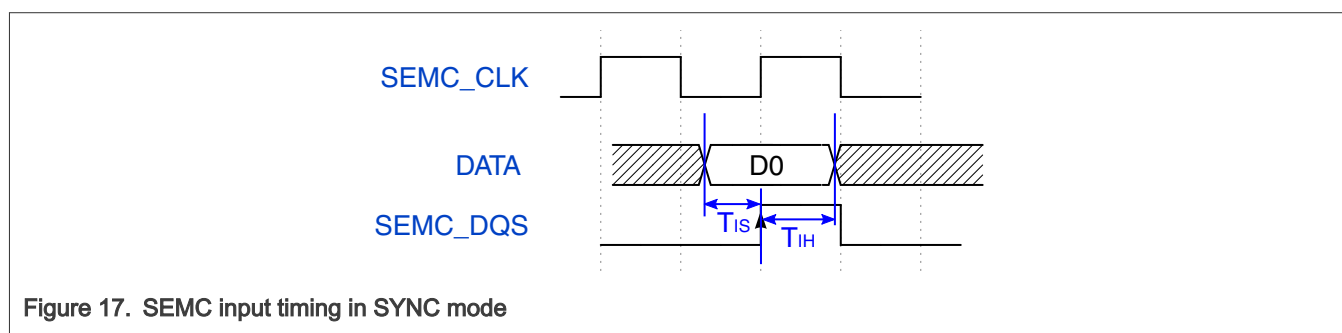

4.5.2 SRAMC parameters

The following sections provide information on SRAMC interface.

Measurements are with a load of 15 pf and an input slew rate of 1 V/ns.

4.5.2.1 SRAMC output timing

There is ASYNC mode for SRAMC output timing.

4.5.2.1.1 SRAMC output timing in ASYNC mode

Table 46 shows SRAMC output timing in ASYNC mode.

Table 46. SRAMC output timing in ASYNC mode

Symbol	Parameter	Min.	Max.	Unit	Comment
	Frequency of operation	—	133	MHz	
T_{CK}	Internal clock period	7.5	—	ns	
T_{AVO}	Address output valid time	—	2	ns	These timing parameters apply to Address and ADV# for SRAM in ASYNC mode.
T_{AHO}	Address output hold time	$(T_{CK} - 2)$ ¹	—	ns	
T_{ADVL}	Active low time	$(T_{CK} - 1)$ ²			

Table continues on the next page...

Table 46. SRAMC output timing in ASYNC mode...continued

Symbol	Parameter	Min.	Max.	Unit	Comment
T _{DVO}	Data output valid time	—	2	ns	These timing parameters apply to Data and DM for SRAM interface.
T _{DHO}	Data output hold time	(TCK - 2) ³	—	ns	
T _{WEL}	WE# low time	(TCK - 1) ⁴		ns	

1. Address output hold time is configurable by BLK_CTRL_WAKEUPMIX register's SRAMCR0[AH]. AH field setting value is 0x0 in above table. When AH is set with value N, T_{AHO} min time should be $((N + 1) \times T_{CK} - 2)$. See the *i.MX RT1180 Reference Manual* (IMXRT1180RM) for more detail about SRAMCR0[AH] register field.
2. ADV# low time is configurable by BLK_CTRL_WAKEUPMIX register's SRAMCR0[AS]. AS field setting value is 0x1 in above table. When AS is set with value N, T_{ADVL} min time should be $((N + 1) \times T_{CK} - 1)$. See the *i.MX RT1180 Reference Manual* (IMXRT1180RM) for more detail about SRAMCR0[AS] register field.
3. Data output hold time is configurable by BLK_CTRL_WAKEUPMIX register's SRAMCR1[WEH]. WEH field setting value is 0x0 in above table. When WEH is set with value N, T_{DHO} min time should be $((N + 1) \times T_{CK} - 2)$. See the *i.MX RT1180 Reference Manual* (IMXRT1180RM) for more detail about SRAMCR1[WEH] register field.
4. WE# low time is configurable by BLK_CTRL_WAKEUPMIX register's SRAMCR1[WEL]. WEL field setting value is 0x0 in above table. When WEL is set with value N, T_{WEL} min time should be $((N + 1) \times T_{CK} - 1)$. See the *i.MX RT1180 Reference Manual* (IMXRT1180RM) for more detail about SRAMCR1[WEL] register field.

Figure 18 shows the output timing in ASYNC mode.

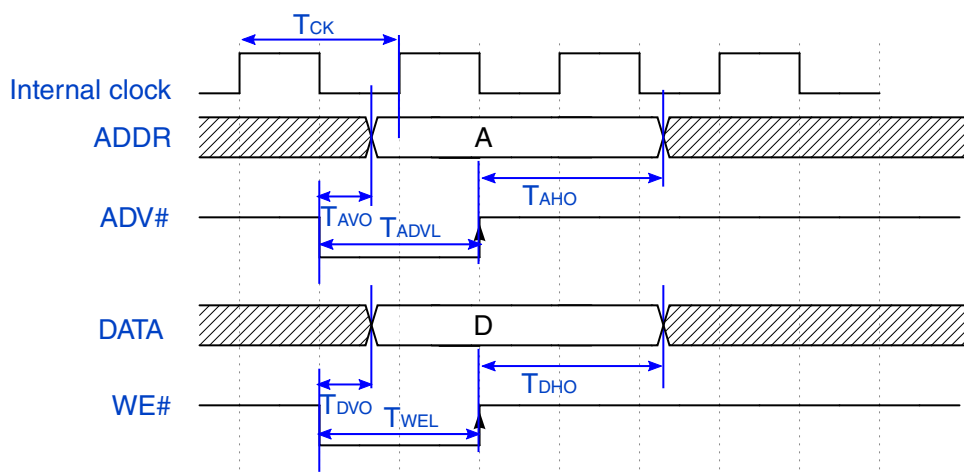


Figure 18. SRAMC output timing in ASYNC mode

4.5.2.2 SRAMC input timing

There is ASYNC mode for SRAMC input timing.


4.5.2.2.1 SRAMC input timing in ASYNC mode

Table 46 shows SRAMC input timing in ASYNC mode.

Table 47. SRAMC input timing in ASYNC mode

Symbol	Parameter	Min.	Max.	Unit	Comment
T_{IS}	Data input setup	7.1	—	ns	For SRAM, these timing parameters apply to RE# and Read Data.
T_{IH}	Data input hold	0	—	ns	

Figure 18 shows the input timing in ASYNC mode.

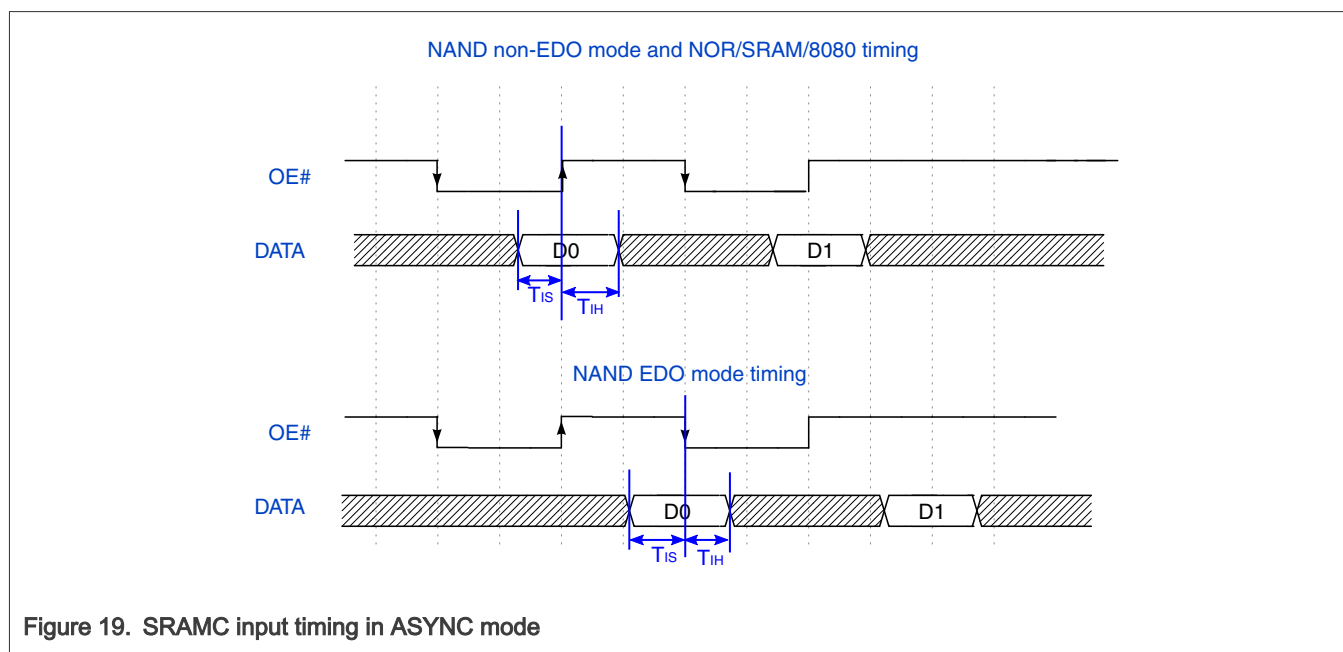

4.5.3 FlexSPI parameters

Measurements are with a load 15 pF and input slew rate of 1 V/ns.

FlexSPI1 pin multiplex options performance specifications:

1. GPIO_B1_XX and GPIO_B2_XX support the maximum 200 MHz operation frequency;
2. GPIO_SD_B2_XX only supports the maximum 166 MHz operation frequency.

FlexSPI2 pin multiplex options performance specifications:

1. GPIO_EMC_B1_XX supports the maximum 166 MHz operation frequency;
2. GPIO_AON_XX only supports the maximum 104 MHz operation frequency.

4.5.3.1 FlexSPI input/read timing

There are three sources for the internal sample clock for FlexSPI read data:

- Dummy read strobe generated by FlexSPI controller and looped back internally (FlexSPI_n_MCR0[RXCLKSRC] = 0x0)
- Dummy read strobe generated by FlexSPI controller and looped back through the DQS pad (FlexSPI_n_MCR0[RXCLKSRC] = 0x1)
- Read strobe provided by memory device and input from DQS pad (FlexSPI_n_MCR0[RXCLKSRC] = 0x3)

The following sections describe input signal timing for each of these three internal sample clock sources.

4.5.3.1.1 SDR mode with FlexSPIn_MCR0[RXCLKSRC] = 0x0, 0x1

Table 48. FlexSPI input timing in SDR mode where FlexSPIn_MCR0[RXCLKSRC] = 0x0

Symbol	Parameter	Min	Max	Unit
	Frequency of operation	—	60	MHz
T _{IS}	Setup time for incoming data	8.67	—	ns
T _{IH}	Hold time for incoming data	0	—	ns

Table 49. FlexSPI input timing in SDR mode where FlexSPIn_MCR0[RXCLKSRC] = 0x1

Symbol	Parameter	Min	Max	Unit
	Frequency of operation	—	133	MHz
T _{IS}	Setup time for incoming data	2	—	ns
T _{IH}	Hold time for incoming data	1	—	ns

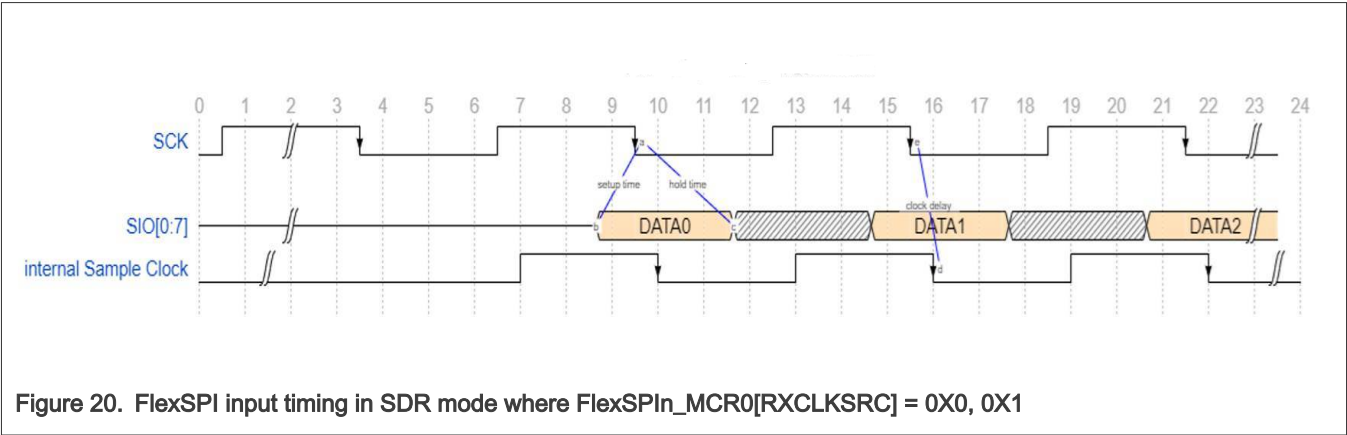


Figure 20. FlexSPI input timing in SDR mode where FlexSPIn_MCR0[RXCLKSRC] = 0x0, 0x1

NOTE

Timing shown is based on the memory generating read data on the SCK falling edge, and FlexSPI controller sampling read data on the falling edge.


4.5.3.1.2 SDR mode with FlexSPIn_MCR0[RXCLKSRC] = 0x3

There are two cases when the memory provides both read data and the read strobe in SDR mode:

- A1—Memory generates both read data and read strobe on SCK rising edge (or falling edge)
- A2—Memory generates read data on SCK falling edge and generates read strobe on SCK rising edge

Table 50. FlexSPI input timing in SDR mode where FlexSPI_n_MCR0[RXCLKSRC] = 0x3 (case A1)


Symbol	Parameter	Value		Unit
		Min	Max	
	Frequency of operation	—	166	MHz
$T_{SCKD} - T_{SCKDQS}$	Time delta between T_{SCKD} and T_{SCKDQS}	-2	2	ns

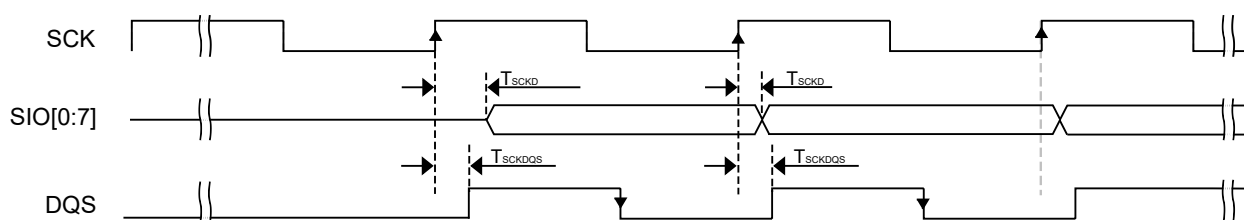Figure 21. FlexSPI input timing in SDR mode where FlexSPI_n_MCR0[RXCLKSRC] = 0X3 (case A1)**NOTE**

Timing shown is based on the memory generating read data and read strobe on the SCK rising edge. The FlexSPI controller samples read data on the DQS falling edge.

Table 51. FlexSPI input timing in SDR mode where FlexSPI_n_MCR0[RXCLKSRC] = 0x3 (case A2)

Symbol	Parameter	Value		Unit
		Min	Max	
	Frequency of operation	—	166	MHz
$T_{SCKD} - T_{SCKDQS}$	Time delta between T_{SCKD} and T_{SCKDQS}	-2	2	ns

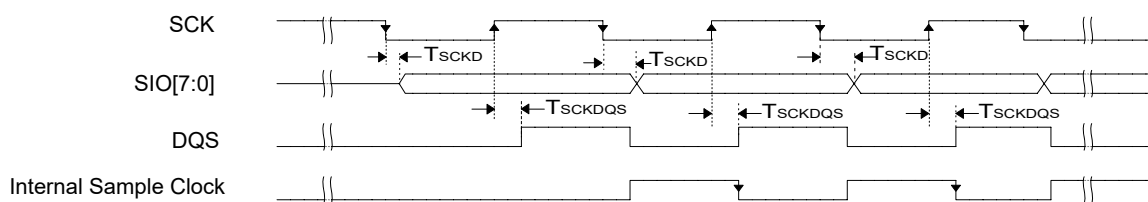Figure 22. FlexSPI input timing in SDR mode where FlexSPI_n_MCR0[RXCLKSRC] = 0X3 (case A2)**NOTE**

Timing shown is based on the memory generating read data and DQS on the SCK falling edge and read strobe on the SCK rising edge. The FlexSPI controller samples read data on a half cycle delayed DQS falling edge.

Table 52 shows the input timing in SDR200M Read mode.

Table 52. FlexSPI input timing in SDR200M Read mode¹

Description	Min	Max	Unit
Input delay	-1.5	+1.5	ns

1. This mode is only supported in FlexSPI1.

4.5.3.1.3 DDR mode with FlexSPIn_MCR0[RXCLKSRC] = 0x0, 0x1


Table 53. FlexSPI input timing in DDR mode where FlexSPIn_MCR0[RXCLKSRC] = 0x0

Symbol	Parameter	Min	Max	Unit
	Frequency of operation	—	30	MHz
T_{IS}	Setup time for incoming data	8.67	—	ns
T_{IH}	Hold time for incoming data	0	—	ns

Table 54. FlexSPI input timing in DDR mode where FlexSPIn_MCR0[RXCLKSRC] = 0x1

Symbol	Parameter	Min	Max	Unit
	Frequency of operation ¹	—	66	MHz
T_{IS}	Setup time for incoming data	2	—	ns
T_{IH}	Hold time for incoming data	1	—	ns

1. Note: GPIO_AON_XX maximum frequency of operation in DDR mode is 52 MHz where FlexSPIn_MCR0[RXCLKSRC] = 0x1.

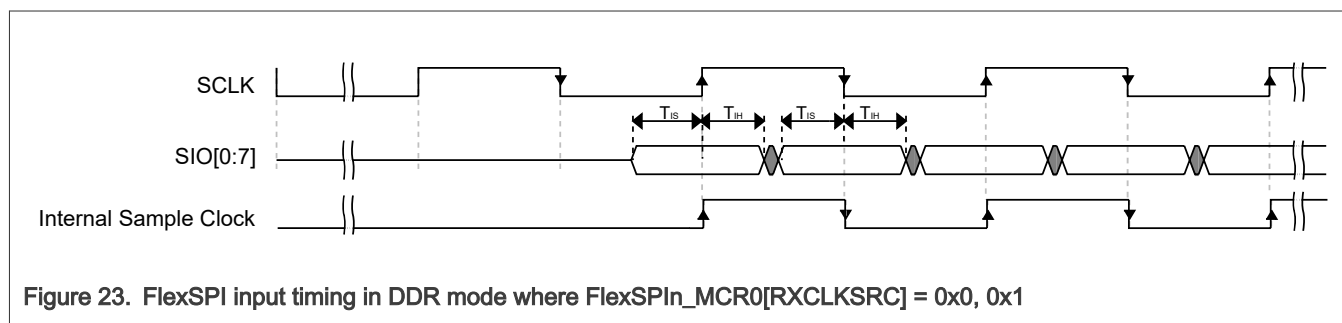

4.5.3.1.4 DDR mode with FlexSPIn_MCR0[RXCLKSRC] = 0x3

There are two cases when the memory provides both read data and the read strobe in DDR mode:

- B1—Memory generates both read data and read strobe on SCK edges
- B2—Memory generates read data on SCK edges and generates read strobe on SCK2 edges

Table 55. FlexSPI input timing in DDR mode where FlexSPIn_MCR0[RXCLKSRC] = 0x3 (case B1)

Symbol	Parameter	Min	Max	Unit
	Frequency of operation	—	166	MHz

Table continues on the next page...

Table 55. FlexSPI input timing in DDR mode where FlexSPI_n_MCR0[RXCLKSRC] = 0x3 (case B1) ...continued

Symbol	Parameter	Min	Max	Unit
T _{SCKD} - T _{SCKDQS}	Time delta between T _{SCKD} and T _{SCKDQS}	-1	1	ns

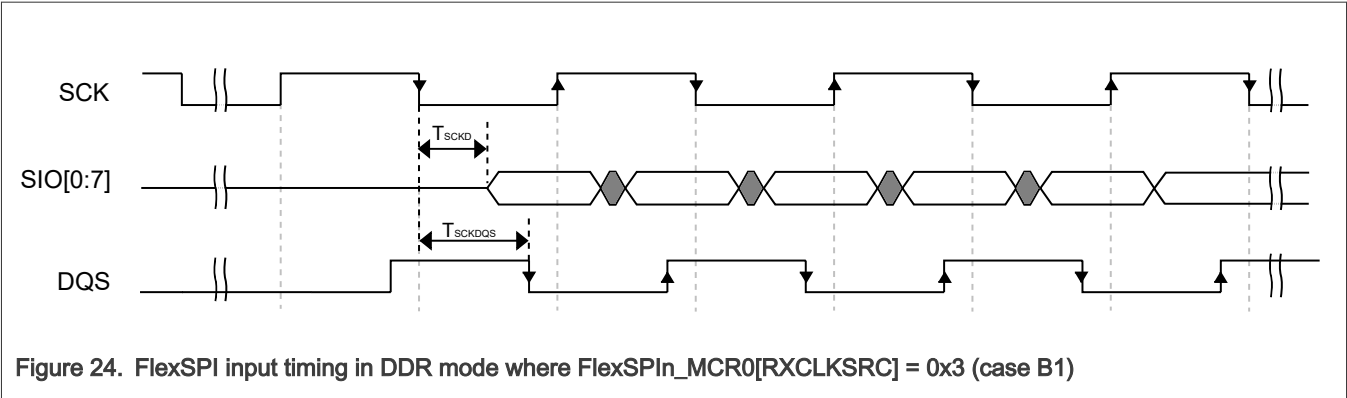


Figure 24. FlexSPI input timing in DDR mode where FlexSPI_n_MCR0[RXCLKSRC] = 0x3 (case B1)

Table 56. FlexSPI input timing in DDR mode where FlexSPI_n_MCR0[RXCLKSRC] = 0x3 (case B2)

Symbol	Parameter	Min	Max	Unit
	Frequency of operation	—	166	MHz
T _{SCKD} - T _{SCKDQS}	Time delta between T _{SCKD} and T _{SCKDQS}	-1	1	ns

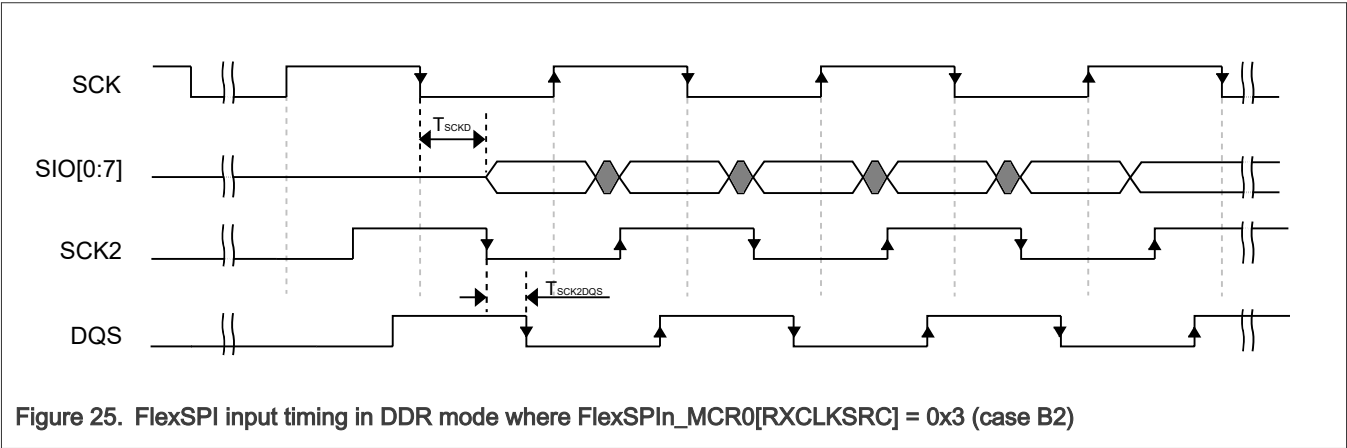


Figure 25. FlexSPI input timing in DDR mode where FlexSPI_n_MCR0[RXCLKSRC] = 0x3 (case B2)

Table 57 shows the input timing in DDR200M Read mode.

Table 57. FlexSPI input timing in DDR200M Read mode¹

Description	Min	Max	Unit
Input delay	-0.6	+0.6	ns

1. This mode is only supported in FlexSPI1.

4.5.3.2 FlexSPI output/write timing

The following sections describe output signal timing for the FlexSPI controller including control signals and data outputs.

4.5.3.2.1 SDR mode

Table 58. FlexSPI output timing in SDR mode

Symbol	Parameter	Min	Max	Unit
	Frequency of operation	—	166 ¹	MHz
T_{ck}	SCK clock period	6.0	—	ns
T_{DVO}	Output data valid time	—	1	ns
T_{DHO}	Output data hold time	0	—	ns
T_{CSS}	Chip select output setup time	$3 \times T_{CK} - 1$	—	ns
T_{CSH}	Chip select output hold time	$3 \times T_{CK} + 2$	—	ns

1. The actual maximum frequency supported is limited by the FlexSPI $_n$ _MCR0[RXCLKSRC] configuration used. Please refer to the FlexSPI SDR input timing specifications.

NOTE

T_{CSS} and T_{CSH} are configured by the FlexSPI $_n$ _FLSHAxCR1/FlexSPI $_n$ _FLSHBxCR1 register, the default values are shown above. Please refer to the *i.MXRT1180 Reference Manual* (IMXRT1180RM) for more details.

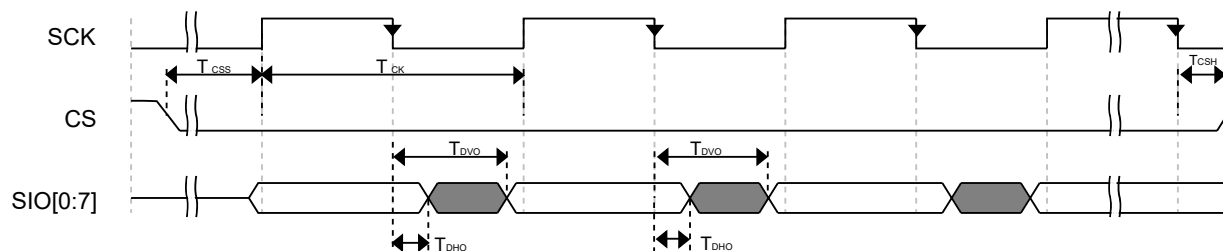


Figure 26. FlexSPI output timing in SDR mode

Table 59 shows the SDR200M Write mode.

Table 59. FlexSPI output timing in SDR200M Writing mode¹

Description	Min	Max	Unit
Output delay	-1.5	+1.5	ns

1. This mode is only supported in FlexSPI1.

4.5.3.2.2 DDR mode

Table 60. FlexSPI output timing in DDR mode

Symbol	Parameter	Min	Max	Unit
	Frequency of operation ¹	—	166	MHz

Table continues on the next page...

Table 60. FlexSPI output timing in DDR mode...continued

Symbol	Parameter	Min	Max	Unit
T _{ck}	SCK clock period	6.0	—	ns
T _{DVO}	Output data valid time	—	2.2	ns
T _{DHO}	Output data hold time	0.8	—	ns
T _{CSS}	Chip select output setup time	3 x T _{CK} / 2 - 0.7	—	ns
T _{CSH}	Chip select output hold time	3 x T _{CK} / 2 + 0.8	—	ns

1. The actual maximum frequency supported is limited by the FlexSPI_n_MCR0[RXCLKSRC] configuration used. Please refer to the FlexSPI DDR input timing specifications.

NOTE

T_{CSS} and T_{CSH} are configured by the FlexSPI_n_FLSHAxCR1/FlexSPI_n_FLSHBxCR1 register, the default values are shown above. Please refer to the *i.MXRT1180 Reference Manual* (IMXRT1180RM) for more details.

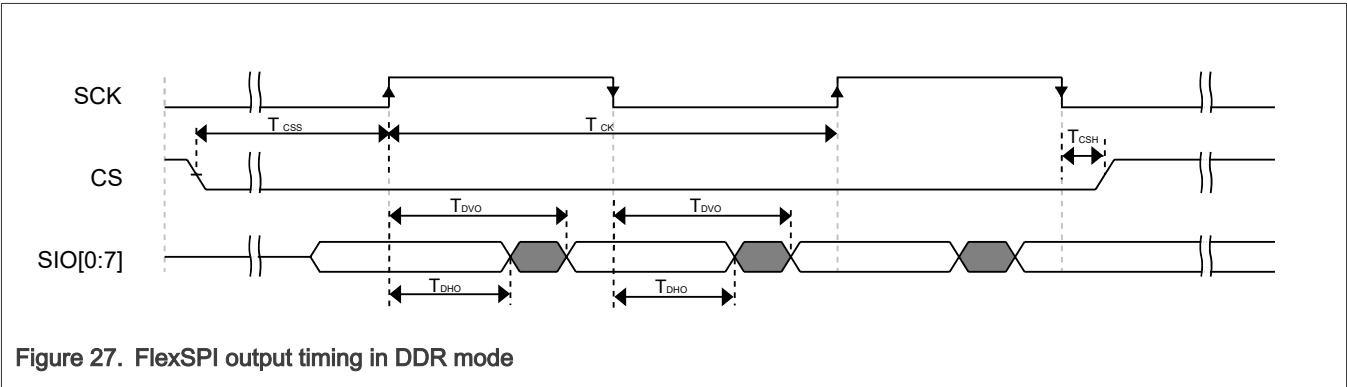


Figure 27. FlexSPI output timing in DDR mode

Table 61 shows the DDR200M Write mode.

Table 61. FlexSPI output timing in DDR200M Writing mode¹

Description	Min	Max	Unit
Output delay	-0.6	+0.6	ns

1. This mode is only supported in FlexSPI1.

4.5.4 FlexSPI Follower parameters

Table 62 shows the AC electrical characteristics about FlexSPI follower.

Table 62. FlexSPI Follower AC electrical characteristics^{1, 2}

Description	Symbol	ALT	Specification			Unit
			Min	Typ	Max	
Clock frequency except for Read Data (03h) instructions (3.0 – 3.6 V)	F _R	f _C	D.C.	—	133	MHz

Table continues on the next page...

Table 62. FlexSPI Follower AC electrical characteristics^{1, 2...continued}

Description	Symbol	ALT	Specification			Unit
			Min	Typ	Max	
Clock frequency except for Read Data (03h) instructions (2.7 – 3.0 V)	F _R	f _C	D.C.	—	104	MHz
Clock frequency except for Read Data instruction (03h)	F _R	—	D.C.	—	50	MHz
Clock High, Low Time for all instructions except for Read Data (03h)	t _{CLH} , t _{CLL}	—	45%Pc	—	—	ns
Clock High, Low Time for Read Data (03h) instruction ³	t _{CRLH} , t _{CRLH}	—	45%Pc	—	—	ns
Clock Rise Time peak to peak	t _{CLCH}	—	0.1	—	—	V/ns
Clock Fall Time peak to peak ⁴	t _{CHCL}	—	0.1	—	—	V/ns
/CS Active Setup Time relative to CLK	t _{SLCH}	t _{CSS}	3	—	—	ns
/CS Not Active Hold Time relative to CLK	t _{CHSL}	—	3	—	—	ns
Data In Setup Time	t _{DVCH}	t _{DSU}	1	—	—	ns
Data In Hold Time	t _{CHDX}	t _{DH}	3	—	—	ns
/CS Active Hold Time relative to CLK	t _{CHSH}	—	3	—	—	ns
/CS Not Active Setup Time relative to CLK	t _{SHCH}	—	3	—	—	ns
/CS Deselect Time (During Read)	t _{SHSL1}	t _{CSH}	10	—	—	ns
/CS Deselect Time (During Erase or Program or Write)	t _{SHSL2}	t _{CSH}	50	—	—	ns
Output Disable Time ⁴	t _{SHQZ}	t _{DIS}	—	—	7	ns
Clock Low to Output Valid	t _{CLQV}	t _V	—	—	6	ns
Output Hold Time	t _{CLQX}	t _{HO}	1.5	—	—	ns
Write Protect Setup Time Before /CS Low	t _{WHSL}	—	20	—	—	ns
Write Protect Hold Time After /CS High ⁵	t _{SHWL}	—	100	—	—	ns
/CS High to Power-down Mode ⁴	t _{DP}	—	—	—	3	μs
/CS High to Standby Mode without ID Read ⁴	t _{RES1}	—	—	—	3	μs
/CS High to Standby Mode with ID Read ⁴	t _{RES2}	—	—	—	1.8	μs

Table continues on the next page...

Table 62. FlexSPI Follower AC electrical characteristics^{1, 2...continued}

Description	Symbol	ALT	Specification			Unit
			Min	Typ	Max	
/CS High to next Instruction after Suspend ⁴	t _{SUS}	—	—	—	20	μs
/CS High to next Instruction after Reset ⁴	t _{RST}	—	—	—	30	μs
/Reset pin Low period to reset the device ^{4,6}	t _{RESET}	—	1	—	—	μs
Write Status Register Time	t _W	—	—	10	15	ms
Page Program Time	t _{PP}	—	—	0.4	3	ms
Sector Erase Time (4 KB)	t _{SE}	—	—	50	400	ms
Block Erase Time (32 KB)	t _{BE1}	—	—	120	1,600	ms
Block Erase Time (64 KB)	t _{BE2}	—	—	150	2,000	ms
Chip Erase Time	t _{CE}	—	—	80	400	s

1. Tested on samples basis and specified through design and characterization data. TA = 25°C, VCC = 3.0 V.
2. 4-bytes address alignment for Quad Read: read address start from A1,A0 = 0,0
3. Clock high + Clock low must be less than or equal to Pc. Pc = 1/fc (max.)
4. Value guaranteed by design and/or characterization, not 100% tested in production.
5. Only applicable as a constraint for a Write Status Register instruction when SRP = 1.
6. It is possible to reset the device with shorter t_{RESET} (as short as a few hundred ns), a 1 μs minimum is recommended to ensure reliable operation.

4.6 Audio

This section provides information about audio module.

4.6.1 PDM Microphone interface timing parameters

NOTE

These timing requirements apply only if the clock divider is enabled (PDM_CTRL2[CLKDIV] = 0), otherwise there are no special timing requirements.

The PDM microphones must meet the setup and hold timing requirements shown in the following table. The "k" factor value in [Table 63](#) depends on the selected quality mode as shown in [Table 64](#).

Table 63. PDM timing parameters


Parameter	Value
trs, tfs	≤ floor (k x CLKDIV) - 1 / PDM_CLK_ROOT rate ¹
trh, tfh	≥ 0

1. Depending on value of "K", you must ensure that floor (K x CTRL_2[CLKDIV]) > 1 to avoid timing problems.

Table 64. K factor value

Quality factor	K factor
High Quality	1/2
Medium Quality, Very Low Quality 0	1
Low Quality, Very Low Quality 1	2
Very Low Quality 2	4

Figure 28 illustrates the timing requirements for the PDM.

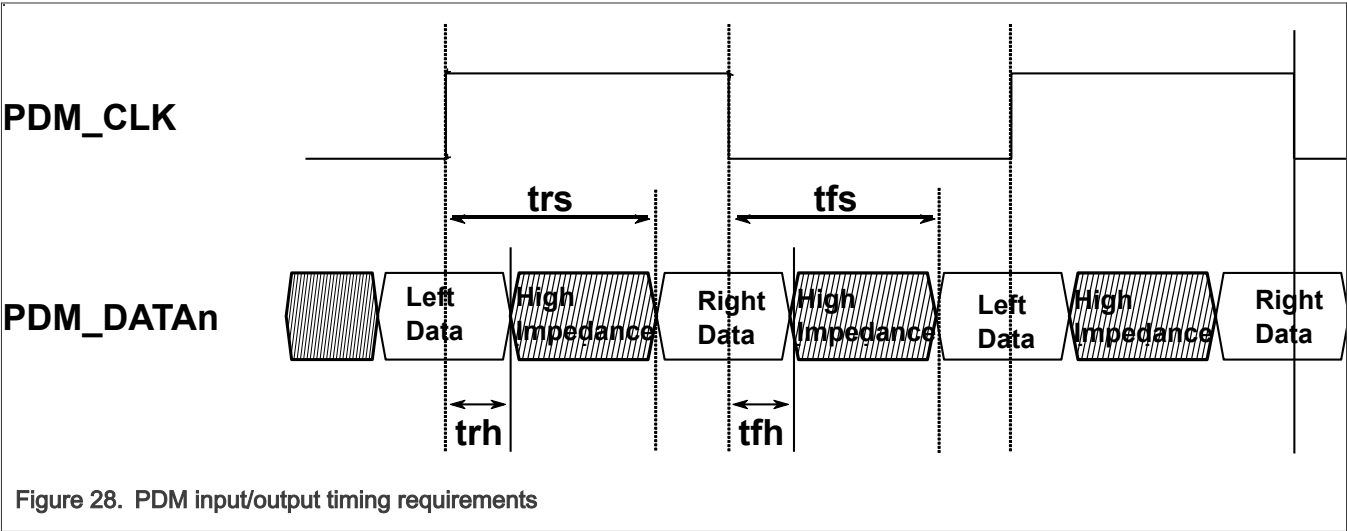

4.6.2 SAI/I2S switching specifications

This section provides the AC timings for the SAI in Controller (clocks driven) and Target (clocks input) modes. All timings are given for non-inverted serial clock polarity (SAI_TCR2[BCP] = 0, SAI_RCR2[BCP] = 0) and non-inverted frame sync (SAI_TCR4[FSP] = 0, SAI_RCR4[FSP] = 0). If the polarity of the clock and/or the frame sync have been inverted, all the timings remain valid by inverting the clock signal (SAI_BCLK) and/or the frame sync (SAI_FS) shown in the figures below.

Table 65. Controller mode SAI timing

Num	Characteristic	Min	Max	Unit
S1	SAI_MCLK cycle time	15	—	ns
S2	SAI_MCLK pulse width high/low	40%	60%	MCLK period
S3	SAI_BCLK cycle time	40	—	ns
S4	SAI_BCLK pulse width high/low	40%	60%	BCLK period
S5	SAI_BCLK to SAI_FS output valid	—	8.4	ns
S6	SAI_BCLK to SAI_FS output invalid	0	—	ns

Table continues on the next page...

Table 65. Controller mode SAI timing ...continued

Num	Characteristic	Min	Max	Unit
S7	SAI_BCLK to SAI_TXD valid	—	10	ns
S8	SAI_BCLK to SAI_TXD invalid	1	—	ns
S9	SAI_RXD/SAI_FS input setup before SAI_BCLK	14	—	ns
S10	SAI_RXD/SAI_FS input hold after SAI_BCLK	0	—	ns

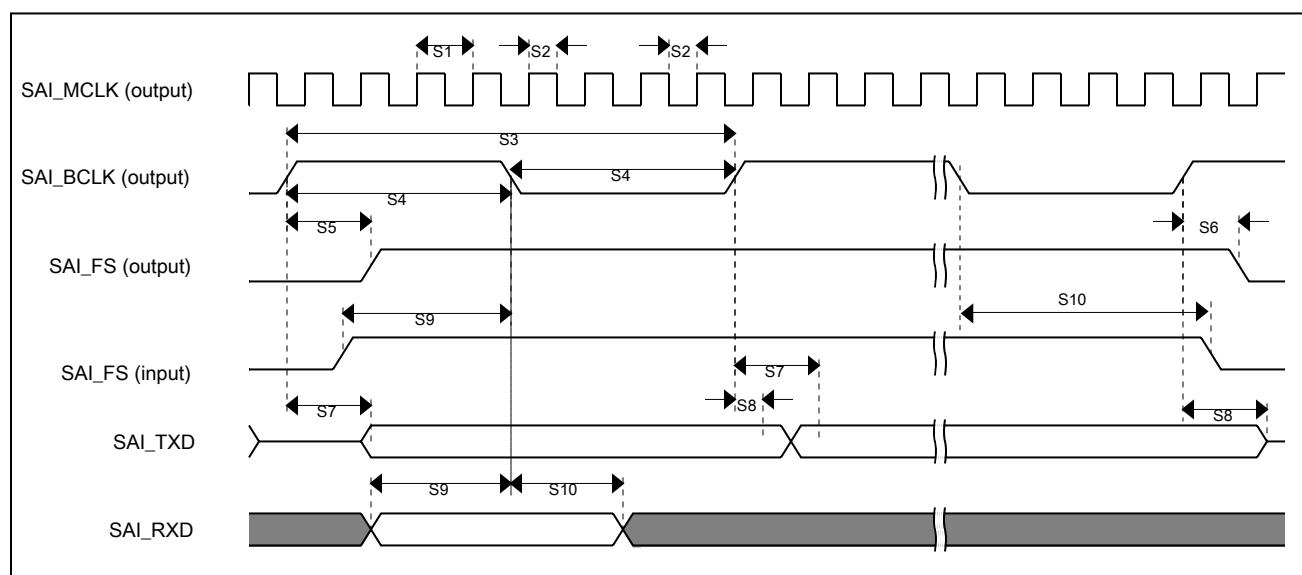


Figure 29. SAI timing—Controller modes

Table 66. Target mode SAI timing

Num	Characteristic	Min	Max	Unit
S11	SAI_BCLK cycle time (input)	40	—	ns
S12	SAI_BCLK pulse width high/low (input)	40%	60%	BCLK period
S13	SAI_FS input setup before SAI_BCLK	6	—	ns
S14	SAI_FS input hold after SAI_BCLK	2	—	ns
S15	SAI_BCLK to SAI_TXD/SAI_FS output valid	—	20	ns
S16	SAI_BCLK to SAI_TXD/SAI_FS output invalid	-1.5	—	ns
S17	SAI_RXD setup before SAI_BCLK	6	—	ns
S18	SAI_RXD hold after SAI_BCLK	2	—	ns
S19	SAI_FS input assertion to SAI_TXD output ¹	—	18.5	ns

1. Applies to first bit in each frame and only if the TCR4[FSE] bit is clear.

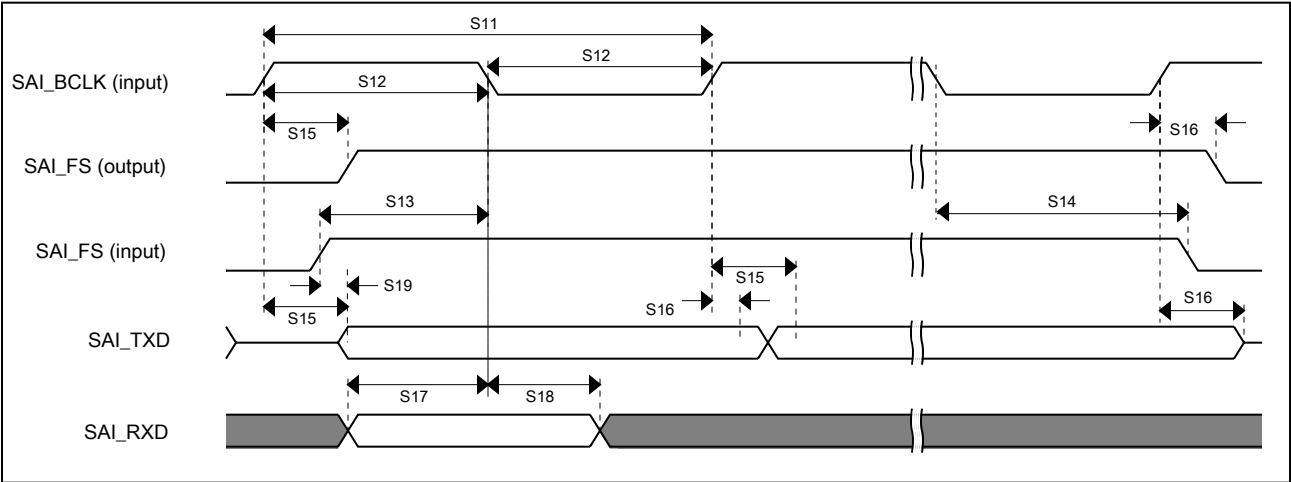


Figure 30. SAI timing—Target mode

4.6.3 SPDIF timing parameters

The Sony/Philips Digital Interconnect Format (SPDIF) data is sent using the bi-phase marking code. When encoding, the SPDIF data signal is modulated by a clock that is twice the bit rate of the data signal.

Table 67 and Figure 31 and Figure 32 show SPDIF timing parameters for the Sony/Philips Digital Interconnect Format (SPDIF), including the timing of the modulating Rx clock (SPDIF_SR_CLK) for SPDIF in Rx mode and the timing of the modulating Tx clock (SPDIF_ST_CLK) for SPDIF in Tx mode.

Table 67. SPDIF timing parameters

Characteristics	Symbol	Timing Parameter Range		Unit
		Min	Max	
SPDIF_IN Skew: asynchronous inputs, no specs apply	—	—	0.7	ns
SPDIF_OUT output (Load = 50 pf)	—	—	1.5	ns
• Skew	—	—	24.2	
• Transition rising	—	—	31.3	
• Transition falling	—	—		
SPDIF_OUT1 output (Load = 30 pf)	—	—	1.5	ns
• Skew	—	—	13.6	
• Transition rising	—	—	18.0	
• Transition falling	—	—		
Modulating Rx clock (SPDIF_SR_CLK) period	srckp	40.0	—	ns
SPDIF_SR_CLK high period	srckph	16.0	—	ns

Table continues on the next page...

Table 67. SPDIF timing parameters ...continued

Characteristics	Symbol	Timing Parameter Range		Unit
		Min	Max	
SPDIF_SR_CLK low period	srckpl	16.0	—	ns
Modulating Tx clock (SPDIF_ST_CLK) period	stclkp	40.0	—	ns
SPDIF_ST_CLK high period	stclkph	16.0	—	ns
SPDIF_ST_CLK low period	stcklpl	16.0	—	ns




Figure 31. SPDIF_SR_CLK timing diagram




Figure 32. SPDIF_ST_CLK timing diagram

4.7 Analog

The following sections provide information about analog interfaces.

4.7.1 16-bit ADC electrical specifications

Table 68 lists the ADC operation conditions.

Table 68. 16-bit ADC operating conditions

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit	Notes
3.3 V supply voltage	—	V _{DDA33} ¹	2.7	3.3	3.6	V	—
Supply voltage	—	V _{DDAD} ²	1.62	1.8	1.98	V	—
Ground voltage	—	V _{SSAD}	-0.1	0	+0.1	V	—
Reference voltage High	—	V _{REFH}	1.0	V _{DDAD}	V _{DDAD}	V	—
Reference voltage Low	—	V _{REFL}	V _{SSAD}	V _{SSAD}	V _{SSAD}	V	—
Input voltage	—	V _{ADIN}	V _{REFL}	—	3.6	V	³
Sample cycles	—	C _{SMP}	3.5 ⁴	—	131.5	Cycles	—

Table continues on the next page...

Table 68. 16-bit ADC operating conditions ...continued

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit	Notes
ADC conversion clock frequency ⁵	16b Mode	F _{ADCK}	6	—	88	MHz	—
	12b Mode		6	—	88		—
Conversion cycles	16b Mode	C _{CONV}	24	—	152	Cycles	—
	12b Mode		19	—	147		—
Conversion Rate	16b Mode	R _{CONV}	—	—	3.14	MS/s	⁶
	12b Mode		—	—	3.8		⁶
Maximum Conversion Rate for internal channels	—	R _{CONV_int}	—	—	0.55	MS/s	⁷
Input Capacitance	3.6 V mode (CSCALE = 0)	C _{ADIN}	—	1.9	2.375	pF	—
	1.8 V mode (CSCALE = 1)		—	3.8	4.75		—
Input Resistance	3.6 V mode (CSCALE = 0)	R _{ADIN}	—	—	2.54	KΩ	—
	1.8 V mode (CSCALE = 1)		—	—	1.27		—
Parasitic Capacitance	—	C _P	—	3	5	pF	⁸
Analog source Resistance	—	R _{AS}	—	—	5	KΩ	⁹

1. Power rail pin is VDDA_ADC_3P3.
2. Power rail pin is VDDA_ADC_1P8.
3. CSCALE bit must be clear for >1.8 V inputs.
4. Must meet min T_{SMP}
5. Only valid when VDDA_ADC_1P8 is selected as ADC voltage reference. If ADC_VREFH is selected as ADC voltage reference, the maximum ADC conversion clock frequency is 20 MHz to meet the listed specifications.
6. F_{ADCK} = 88 MHz, STS = 010
7. F_{ADCK} = 88 MHz, STS = 111
8. Includes Pad, Pin
9. This resistance is external to the MCU. To achieve the best results, the analog source resistance should be kept as low as possible.

Table 69 lists the ADC electrical characteristics.

Table 69. 16-bit ADC electrical characteristics

Characteristic	Conditions ¹	Symbol	Min	Typ ²	Max	Unit	Notes
Current consumption	Power Enabled (PWREN = 1) No Conversions	I _{DDAD}	—	75	—	μA	—

Table continues on the next page...

Table 69. 16-bit ADC electrical characteristics ...continued

Characteristic	Conditions ¹	Symbol	Min	Typ ²	Max	Unit	Notes
	12b, Single-Enabled Mode		—	542	—	μA	
	12b, Differential or Dual-SE Mode		—	807	—	μA	
	16b, Single-Enabled Mode		—	789	—	μA	³
	16b, Differential or Dual-SE Mode		—	1329	—	μA	⁴
Temperature sensor supply current	Temp sensor adder	I _{DDTS}	—	60	—	μA	—
Required sample time	Use equation based on R _{AS} , R _{ADIN} , C _{ADIN} , C _{AS} , C _P , and desired accuracy	T _{SMP_REQ}	See note	—	—	ns	⁵
Required Auto-Zero time	12b Mode	T _{AZ_REQ}	65.5	—	—	ns	⁶
	16b Mode		89.3	—	—	ns	⁷
Sample time	External inputs	T _{SMP}	See note	—	—	ns	⁸
Internal channel sample time	Internal inputs	T _{SMP_INT}	1.5	—	—	μs	—
Differential Nonlinearity	12b Mode	DNL	—	—	±1	LSB	⁹
Integral Nonlinearity	12b Mode	INL	—	—	±1.5	LSB	—
Offset Error ¹⁰	12b Mode, V _{ADIN} = V _{REFL}	E _O	—	—	±0.02	%FSR	”
Gain Error ¹⁴	12b Mode, V _{ADIN} = V _{REFH}	E _G	—	—	±0.05	%FSR	—
ENOB, 12b Differential Mode	0.95 MS/s (F _{adc} = 88 MHz, AVGS = 0010)	ENOB _{DIFF}	—	12.0	—	—	¹¹
	3.8 MS/s (F _{adc} = 88 MHz, AVGS = 0000)		—	11.4	—	—	

Table continues on the next page...

Table 69. 16-bit ADC electrical characteristics ...continued

Characteristic	Conditions ¹	Symbol	Min	Typ ²	Max	Unit	Notes
ENOB, 12b Single Ended Mode	0.95 MS/s (F_{adc} = 88 MHz, AVGS = 0010)	ENOB _{SE}	—	11.3	—	—	
	3.8 MS/s (F_{adc} = 88 MHz, AVGS = 0000)		—	10.8	—	—	
THD	12b Mode	THD	—	88	—	dB	—
SFDR	12b Mode	SFDR	—	89	—	dB	—
Differential Nonlinearity	16b Mode	DNL	—	—	±3	LSB	—
Integral Nonlinearity	16b Mode	INL	—	—	±16	LSB	—
Offset Error	16b Mode, V_{ADIN} = V_{REFL}	E _O	—	—	±0.01	%FSR	^{11, 12, 13}
Gain Error	16b Mode, V_{ADIN} = V_{REFH}	E _G	—	—	±0.03	%FSR	—
Total Unadjusted Error	16b Mode	TUE	—	—	±52	LSB	—
ENOB, 16b Differential Mode	0.785 MS/s (F_{adc} = 88 MHz, AVGS = 0010)	ENOB _{DIFF}	—	13.3	—	—	¹¹
	3.14 MS/s (F_{adc} = 88 MHz, AVGS = 0000)		—	12.5	—	—	
ENOB, 16b Single Ended Mode	0.785 MS/s (F_{adc} = 88 MHz, AVGS = 0010)	ENOB _{SE}	—	12.8	—	—	
	3.14 MS/s (F_{adc} = 88 MHz, AVGS = 0000)		—	11.9	—	—	
THD	16b Mode	THD	—	95	—	dB	—
SFDR	16b Mode	SFDR	—	88	—	dB	—
Start-up time	—	t _{ADCSTUP}	5	—	—	μs	¹⁵
Temperature Sensor Error	—	E _{TS}	—	±1.5	±3.5	°C	
Slope factor constant	—	A	—	789.2	—	—	—

Table continues on the next page...

Table 69. 16-bit ADC electrical characteristics ...continued

Characteristic	Conditions ¹	Symbol	Min	Typ ²	Max	Unit	Notes
Offset constant	—	B	—	319.2	—	—	—
Bandgap constant	—	α	—	11.2	—	—	—

1. All accuracy numbers assume the ADC is calibrated with $V_{REFH} = V_{DDA}$ and using a high speed dedicated input channel.
2. Typical values assume $V_{DDA} = 1.8\text{ V}$, $\text{Temp} = 25\text{ }^{\circ}\text{C}$, $f_{ADCK} = 88\text{ MHz}$ unless otherwise stated. Typical values are for reference only, and are not tested in production.
3. 88 MHz clock, CTYPE = 0X
4. 88 MHz clock, CTYPE = 1X
5. $T_{SMP_REQ} = B * \ln(2) * [R_{AS} * (C_{AS} + C_P + C_{ADIN}) + (R_{AS} + R_{ADCtotal}) * C_{ADIN}]$, B = desired sampling accuracy in bits
6. 5.5 cycles at 88 MHz
7. 7.5 cycles at 88 MHz
8. $T_{SMP} = \max(T_{SMP_REQ}, T_{AZ_REQ})$
9. Monotonic with no missing codes in 12b Mode
10. Offset error is same as ZSE, error measured at 0 V with zero scale.
11. $F_{in} = 1\text{ kHz}$, half factor mode
12. For 3.6 V tolerant input channels
13. $FSR = V_{REFH} - V_{REFL}$
14. Gain error is $FSE - ZSE$ (same as $FSE - E_O$)
15. Delay required

4.7.1.1 16-bit ADC input impedance equivalent circuit diagram

There is an additional R_{IOMUX} of 350 Ω (from 295 Ω to 405 Ω) resistance if an input goes through the MUX inside the IO and C_P of 3 pF as shown in Figure 33.

To calculate the sample request time, using the following equation where $R_{ADCtotal} = R_{ADIN} + R_{IOMUX}$, $R_{IOMUX} = 350\text{ }\Omega$, $C_P = 3\text{ pF}$ as shown in Figure 33.

$$T_{SMP_REQ} = B * \ln(2) * [R_{AS} * (C_{AS} + C_P + C_{ADIN}) + (R_{AS} + R_{ADCtotal}) * C_{ADIN}]$$

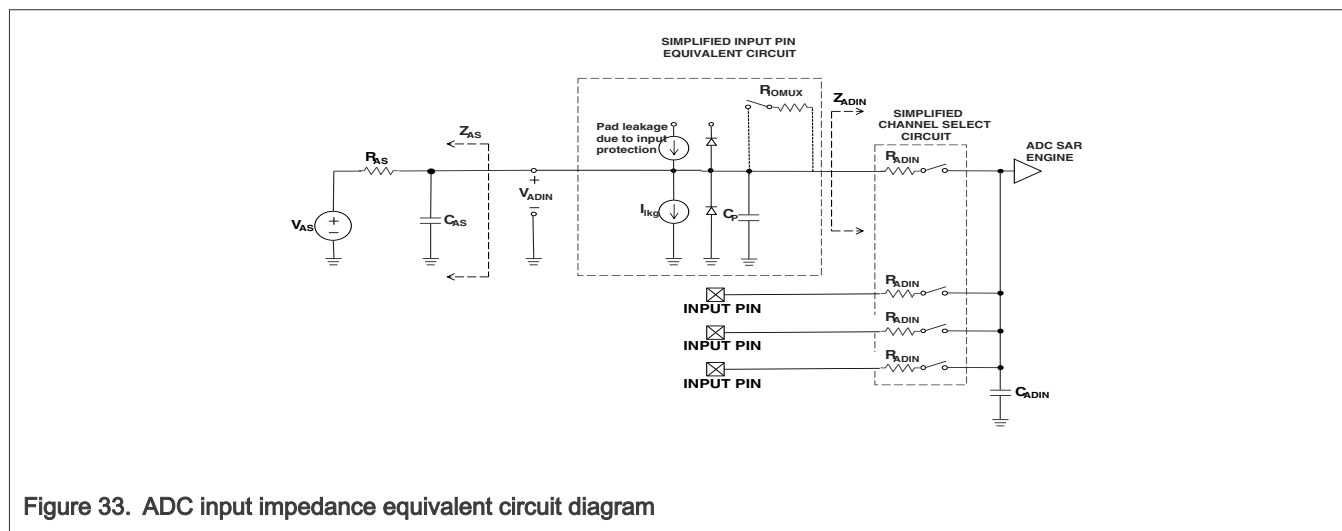


Figure 33. ADC input impedance equivalent circuit diagram

4.7.2 Voltage Reference (VREF)

Table 70 lists the electrical specification of VREF.

Table 70. VREF electrical specifications

Symbol	Description	Min	Typ	Max	Unit
VDDA	Analog supply voltage	1.71	—	1.98	V
VDD	Digital supply voltage	—	1.1	—	V
V _{STEP}	Fine trim step	—	0.5	—	mV
T _{STUP}	Start-up time	—	400	—	μs
T _C	Temperature coefficient	—	15	—	ppm/°C
I _{OUT}	Drive strength	±1	—	—	mA
ΔV _{LOAD}	Load regulation	—	100	200	μV/mA
V _{OUT}	Buffered output voltage	—	1.2	—	V
I _Q	Quiescent	—	750	—	μA
C	Capacitance	—	220	—	nF

4.7.3 12-bit DAC electrical characteristics

4.7.3.1 12-bit DAC operating requirements

Table 71. 12-bit DAC operating conditions

Symbol	Description	Min	Typ	Max	Unit	Notes
C _L	Output load capacitance	—	50	100	pF	¹
I _L	Output load current	—	—	1	mA	²

1. The DAC output can drive R and C loading. The user should consider both DC and dynamic application requirements. 50 pF C_L provides the best dynamic performance, while 100 pF provides the best DC performance.
2. Sink or source current ability.

Table 72. DAC characteristics

Symbol	Description	Test Conditions	Min	Typ	Max	Unit	Notes
VDACOUTL	DAC low level output voltage	ADC_VREFH selected, Rload = 18 kΩ, Cload = 50 pF	VSS	—	0.15	V	¹
VDACOUTH	DAC high level output voltage		VDDA_AD C_1P8 - 0.15	—	VDDA_AD C_1P8	V	
DNL	Differential nonlinearity error	Code 100h — F00h best fit curve	—	±0.5	±1	LSB	—

Table continues on the next page...

Table 72. DAC characteristics ...continued

Symbol	Description	Test Conditions	Min	Typ	Max	Unit	Notes
INL	Integral nonlinearity error	Code 100h — F00h best fit curve	—	±2	—	LSB	—
EO	Offset error	Code 100h	—	±0.6	—	%FSR (Full-scale range)	—
TEO	Offset error temperature coefficient	Code 100h	—	±30	—	μV/°C	—
EG	Gain error	Code F00h	—	±0.4	—	%FSR	—
TEG	Gain error temperature coefficient	Code F00h	—	±10	—	ppm of FSR/°C	—
TFS_LS	Full scale setting time in Low Speed mode	Code 100h — F00h or F00h — 100h @ Zero Temperature Coefficient (ZTC) current	—	5	—	μs	2
TFS_MS	Full scale setting time in Middle Speed mode	Code 100h — F00h or F00h — 100h @ZTC current	—	1	—		
TFS_HS	Full scale setting time in High Speed mode	Code 100h — F00h or F00h — 100h @ZTC current	—	0.5	—		
TCC_LS	Code to code setting time in Low Speed mode	Code 7F7h — 807h or 807h — 7F7h @ZTC current	—	1	—		
TCC_MS	Code to code setting time in Middle Speed mode	Code 7F7h — 807h or 807h — 7F7h @ZTC current	—	0.5	—		
TCC_HS	Code to code setting time in High Speed mode	Code 7F7h — 807h or 807h — 7F7h @ZTC current	—	0.3	—		
SR_LS	Slew rate in Low Speed mode	Code 100h — F00h or F00h — 100h @ZTC current	—	0.24	—	V/μs	3
SR_MS	Slew rate in Middle Speed mode	Code 100h — F00h or F00h — 100h @ZTC current	—	1.2	—		

Table continues on the next page...

Table 72. DAC characteristics ...continued

Symbol	Description	Test Conditions	Min	Typ	Max	Unit	Notes
SR_HS	Slew rate in High Speed mode	Code 100h — F00h or F00h — 100h @ZTC current	—	2.4	—		
PSRR	Power supply rejection ratio	Code 800h, $\Delta VDDA_1P8$ (powered by $VDDA_ADC_1P8$) = 100 mV, DAC Reference Select (DACRFS) = 1	—	70	—	dB	⁴
Glitch	Glitch energy	Code 100h — F00h — 100h	—	30	—	nV-s	—
		Code 7FFh — 800h — 7FFh	—	30	—		
CT	Channel to channel crosstalk	—	—	—	-80	dB	⁵
ROP	Output resistance	Code 100h — F00h and $R_{load} = 18\text{ k}\Omega$	—	200	—	Ω	⁶

1. It is recommended to operate the DAC in the output voltage range between 0.15 V and ($VDDA_ADC_1P8 - 0.15\text{ V}$) for best accuracy. Linearity of the output voltage outside this range will be affected as current load increases.
2. The DAC output remains within ± 0.5 LSB of the final measured value for digital input code change. Noise on the power supply can cause this performance to degrade to ± 1 LSB. This parameter represents both rising edge and falling edge settling time.
3. Time for the DAC output to transition from 10% to 90% signal amplitude (rising edge or falling edge).
4. $PSRR = 20 \times \lg(\Delta VDDA_ADC_1P8 / \Delta VDAC_OUT)$
5. If two DACs are used and sharing the same VREFH.
6. Based on design simulation.

4.7.4 ACMP electrical specifications

Table 73 lists the characteristics of ACMP.

Table 73. ACMP characteristics

Symbol	Description	Condition	Min	Typ	Max	Unit
VAIN	Analog input voltage	—	0	—	$NVCC_GPIO_AD^1$	V
VAIO	Analog input offset voltage	—	—	—	20	mV
VH	Analog comparator hysteresis	HysTrl[1:0] = 00	—	5	—	mV
		HysTrl[1:0] = 01	—	10	—	mV
		HysTrl[1:0] = 10	—	20	—	mV

Table continues on the next page...

Table 73. ACMP characteristics ...continued

Symbol	Description	Condition	Min	Typ	Max	Unit
		HysTrl[1:0] = 11	—	30	—	mV
TDHS	Propagation delay, high-speed mode	Normal supply	—	—	50	ns
	Propagation delay, low-speed mode	—	—	—	5	μs
—	Analog comparator initialization delay	—	—	—	20	μs
INL	8-bit DAC integral non-linearity	—	-1	—	1	LSB
DNL	8-bit DAC differential non-linearity	—	-1	—	1	LSB

1. The maximum input voltage for CMP analog inputs associated with GPIO_AD bank is NVCC_GPIO_AD. RDIVE bit must be set for greater than 1.8 V inputs.

4.7.5 SINC filter specifications

Table 74 lists the timing parameters of SINC.

Table 74. SINC timing parameters

Symbol	Description	Condition	Min	Typ	Max	Unit
MCLK	External modulator clock frequency	—	0.02	—	33	MHz
MMCLK	Manchester modulator clock frequency	Clock recovered internally using External Modulator bit	—	—	22	MHz
TS1	Setup time from data valid to clock high	—	2	—	—	ns
TH1	Hold time from clock high to data valid	—	2	—	—	ns
TS2	Setup time from data valid to clock low	—	2	—	—	ns
TH2	Hold time from clock low to data valid	—	2	—	—	ns
TS3	Setup time from data valid to clock low	—	2	—	—	ns

Table continues on the next page...

Table 74. SINC timing parameters ...continued

Symbol	Description	Condition	Min	Typ	Max	Unit
TH3	Hold time from clock low to data valid	—	2	—	—	ns
TS4	Setup time from data valid to clock high	—	2	—	—	ns
TH4	Hold time from clock high to data valid	—	2	—	—	ns

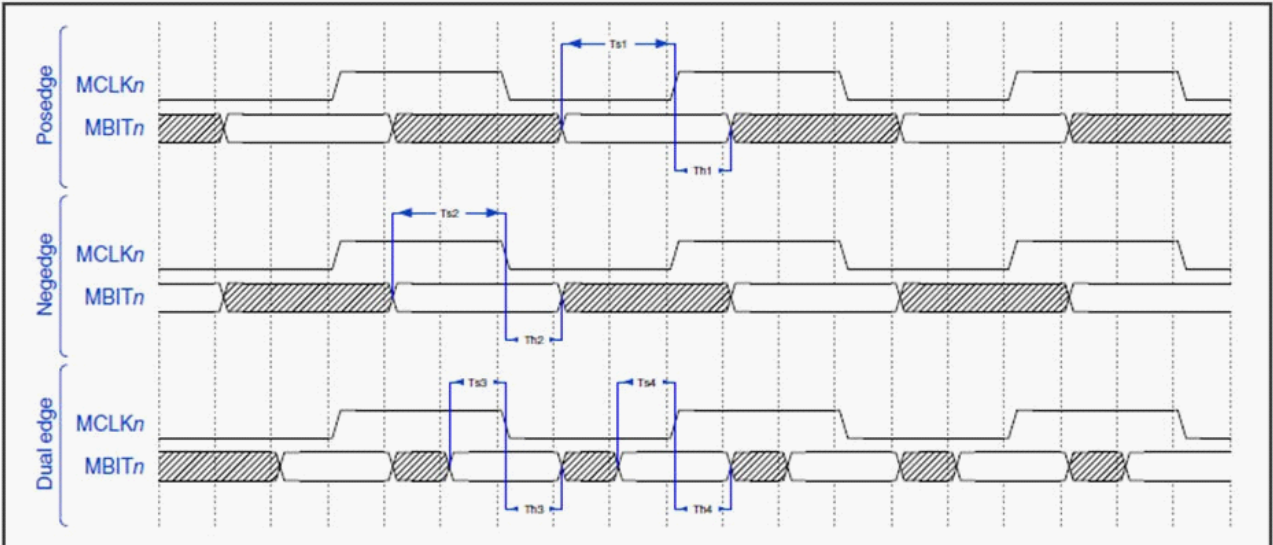


Figure 34. SINC timing

4.7.6 Temperature sensor specifications

Table 75 lists the parameters of temperature sensor.

Table 75. Temperature sensor parameters

Parameter	Min	Max	Unit
Temperature range ¹	-40	125	°C

1. Accuracy of measurement: ± 5°C for 25°C and above, while ± 10°C for below 25°C.

4.8 Communication interfaces

The following sections provide the information about communication interfaces.

4.8.1 LPSPI timing parameters


The Low Power Serial Peripheral Interface (LPSPI) provides a synchronous serial bus with Controller and Peripheral operations. Many of the transfer attributes are programmable. The following tables provide timing characteristics for classic LPSPI timing modes.

All timing is shown with respect to 20% V_{DD} and 80% V_{DD} thresholds, unless noted, as well as input signal transitions of 3 ns and a 30 pF maximum load on all LPSPI pins.

Table 76. LPSPI Controller mode timing

Number	Symbol	Description	Min.	Max.	Units	Note
1	f_{SCK}	Frequency of SPI clock	—	$f_{lpspi_root} / 2$	MHz	1
2	t_{SCK}	SCK period	$2 \times t_{lpspi_root}$	—	ns	2
3	t_{Lead}	Enable lead time	1	—	t_{lpspi_root}	—
4	t_{Lag}	Enable lag time	1	—	t_{lpspi_root}	—
5	t_{wSCK}	Clock (SCK) high or low time	$t_{SCK} / 2 - 3$	—	ns	—
6	t_{SU}	Data setup time (inputs)	3	—	ns	3
7	t_{HI}	Data hold time (inputs)	2	—	ns	—
8	t_V	Data valid (after SCK edge)	—	4.5	ns	—
9	t_{HO}	Data hold time (outputs)	0	—	ns	—

1. Absolute maximum frequency of operation (fop) is 60 MHz. The clock driver in the LPSPI module for f_{lpspi_root} must guaranteed this limit is not exceeded.
2. $t_{lpspi_root} = 1000 / f_{lpspi_root}$
3. If enable sample = 1, the data setup specification is same with the one in Peripheral mode.

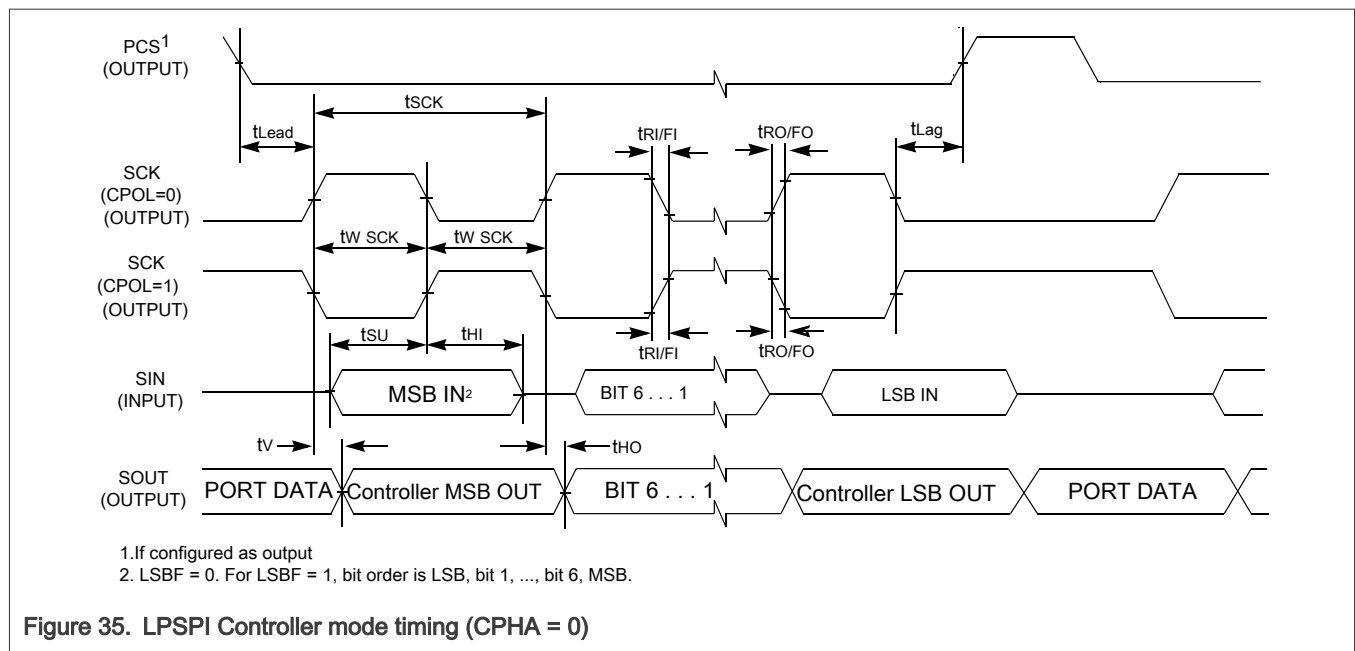

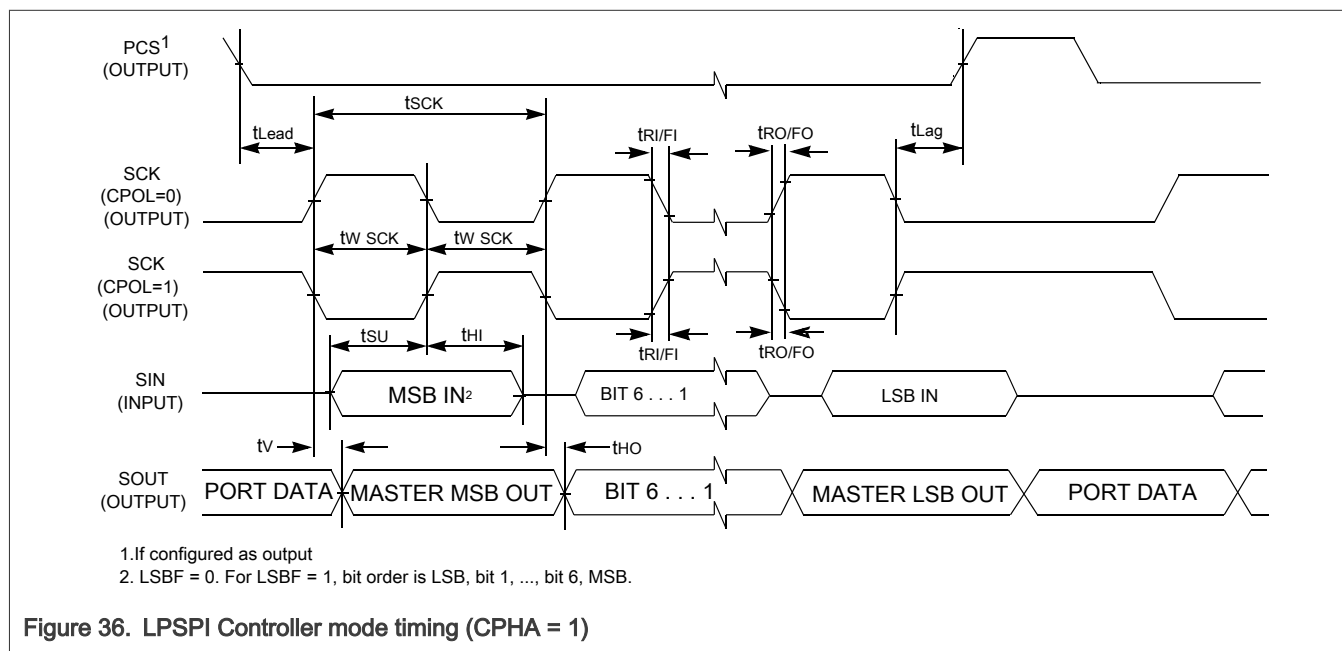


Figure 36. LPSPi Controller mode timing (CPHA = 1)

Table 77. LPSPi Peripheral mode timing

Number	Symbol	Description	Min.	Max.	Units	Note
1	f_{SCK}	Frequency of SPI clock	0	$f_{lpspi_root} / 2$	MHz	1
2	t_{SCK}	SCK period	$2 \times t_{lpspi_root}$	—	ns	2
3	t_{Lead}	Enable lead time	1	—	t_{lpspi_root}	—
4	t_{Lag}	Enable lag time	1	—	t_{lpspi_root}	—
5	t_{WSCK}	Clock (SCK) high or low time	35	65	%	—
6	t_{SU}	Data setup time (inputs)	3	—	ns	—
7	t_{HI}	Data hold time (inputs)	3.8	—	ns	—
8	t_a	Peripheral access time	—	t_{lpspi_root}	ns	3
9	t_{dis}	Peripheral MISO disable time	—	t_{lpspi_root}	ns	4
10	t_v	Data valid (after SCK edge)	—	12.8	ns	—
11	t_{HO}	Data hold time (outputs)	0	—	ns	—

1. Absolute maximum frequency of operation (fop) is 30 MHz. The clock driver in the LPSPi module for f_{lpspi_root} must be guaranteed this limit is not exceeded.
2. $t_{lpspi_root} = 1000 / f_{lpspi_root}$
3. Time to data active from high-impedance state
4. Hold time to high-impedance state

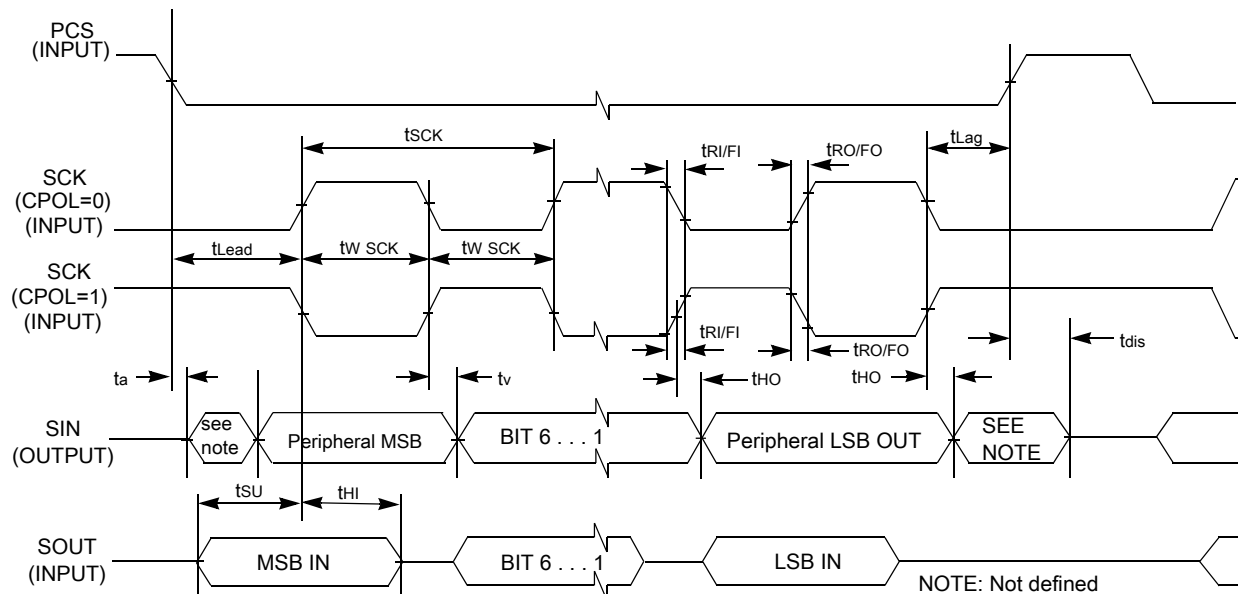


Figure 37. LPSPI Peripheral mode timing (CPHA = 0)

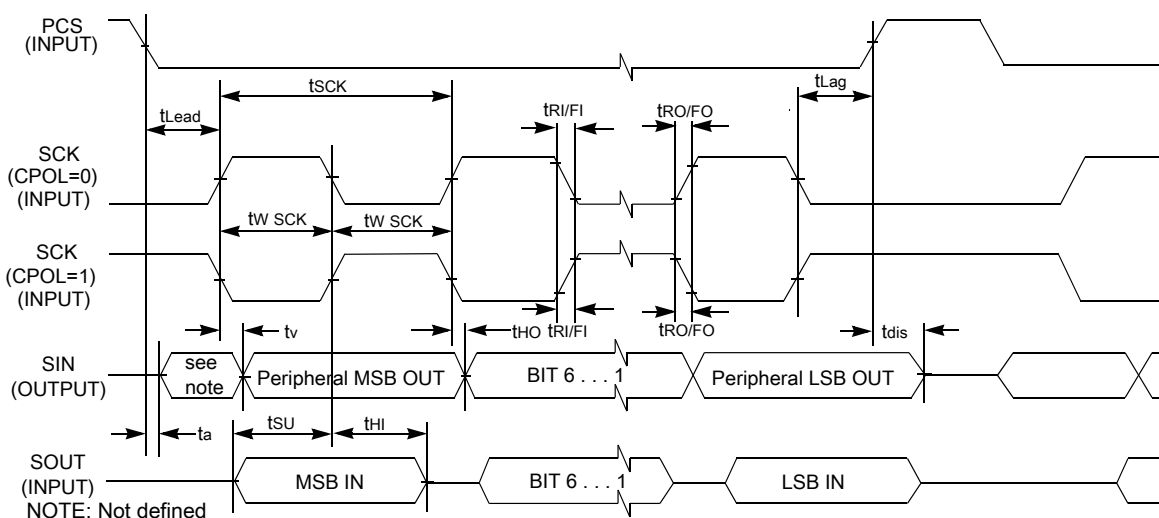


Figure 38. LPSPI Peripheral mode timing (CPHA = 1)

4.8.2 LPI2C module timing parameters

This section describes the timing parameters of the LPI2C module.

Table 78. LPI2C module timing parameters¹

Symbol	Description		Min	Max	Unit	Notes
f _{SCL}	SCL clock frequency	Standard mode (Sm)	0	100	kHz	2
		Fast mode (Fm)	0	400		
		Fast mode Plus (Fm+)	0	1000		

Table continues on the next page...

Table 78. I2C module timing parameters¹ ...continued

Symbol	Description	Min	Max	Unit	Notes
	High speed mode (Hs-mode)	0	3400		
	Ultra Fast mode (UFm)	0	5000		

1. For more details, see *UM10204 I2C-bus specification and user manual*.

2. Standard, Fast, Fast+, and Ultra Fast modes are supported; High speed mode (HS) in Target mode.

4.8.3 Improved Inter-Integrated Circuit Interface (I3C) specifications

I3C conforms to the MIPI I3C v1.1.1 and I3C Basic v1.1.1.

I3C interface is not supported on GPIO-Standard-plus pad type for 5 V operation. Measurements are with maximum output load of 30 pF, input transition of 1 ns. GPIO-Standard-plus pad configured with DSE = 1'b1 and GPIO-Medium pad with DSE = 1'b1 and SRE = 1'b1. SCL, SDA and PUR combination should be of same pad type. For e.g. I3C medium Data Pads to be used with I3C Medium Clock and PUR Pads Only. I3C Standard plus Data Pads to be used with I3C standard plus Clock and PUR pads only.

Table 79. I3C Push-Pull timing parameters (SDR)

Symbol	Characteristic	Min	Typ	Max	Unit	Notes
f_{SCL}	SCL clock frequency	0.01	12.5	12.9	MHz	—
t_{DIG_L}	SCL clock low period ²	32	—	—	ns	—
t_{DIG_H}	SCL clock high period ¹	32	—	—	ns	—
t_{SCO}	Clock in to data out for Target ^{3, 4}	—	—	12	ns	—
t_{CR}	SCL clock rise time	—	—	$150 \times 1 / f_{SCL}$ (capped at 60 ns)	ns	—
t_{CF}	SCL clock fall time ⁵	—	—	$150 \times 1 / f_{SCL}$ (capped at 60 ns)	ns	—
t_{HD_PP}	SDA signal data hold in Push-Pull Mode, Target ⁶	0	—	—	ns	—
t_{SU_PP}	SDA signal setup in Push-Pull Mode	3	—	—	ns	—

1. t_{DIG_L} and t_{DIG_H} are the clock Low and High periods as seen at the receiver end of the I3C Bus using VIL and VIH.

2. As both edges are used, the hold time needs to be satisfied for the respective edges; i.e., $t_{CF} + 3$ for falling edge clocks, and $t_{CR} + 3$ for rising edge clocks.

3. Devices with more than 12 ns of t_{SCO} delay shall set the limitation bit in the BCR, and shall support the GETMXDS CCC to allow the Controller to read this value and adjust computations accordingly. For purposes of system design and test conformance, this parameter should be considered together with pad delay, bus capacitance, propagation delay, and clock triggering points.

4. Pad delay based on 90 Ω / 4 mA driver and 50 pF load. Note that Controller may be a Target in a multi-Controller system, and thus shall also adhere to this requirement.

5. The clock maximum rise/fall time is capped at 60 ns. For lower frequency rise and fall the maximum value is limited at 60 ns, and is not dependent upon the clock frequency.

6. tHD_PP is a Hold time parameter for Push-Pull Mode that has a different value for Controller mode vs. Target mode. In SDR Mode the Hold time parameter is referred to as tHD_SDR.

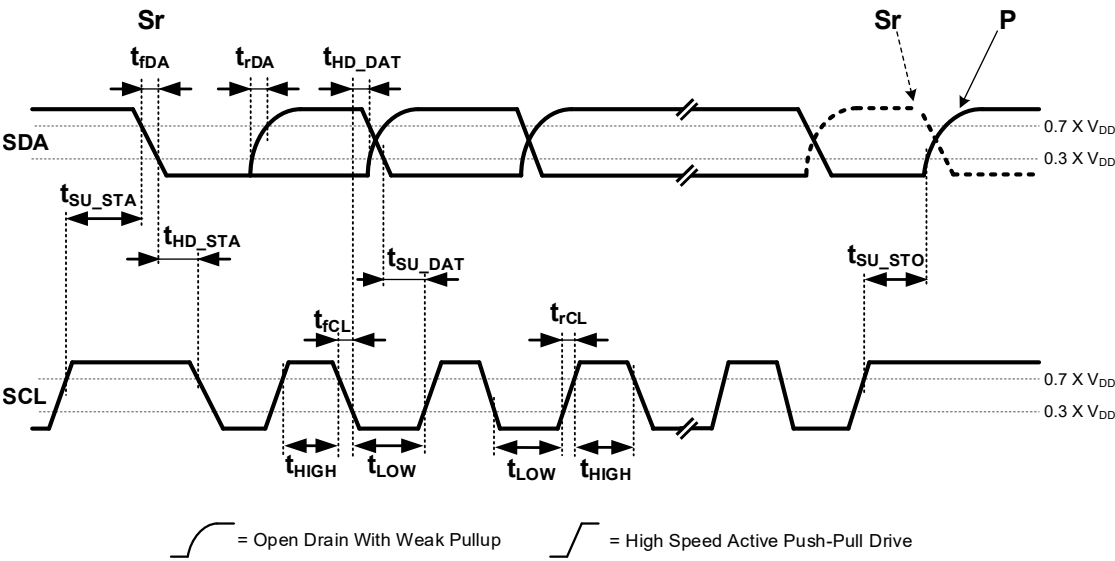


Figure 39. I3C legacy mode timing

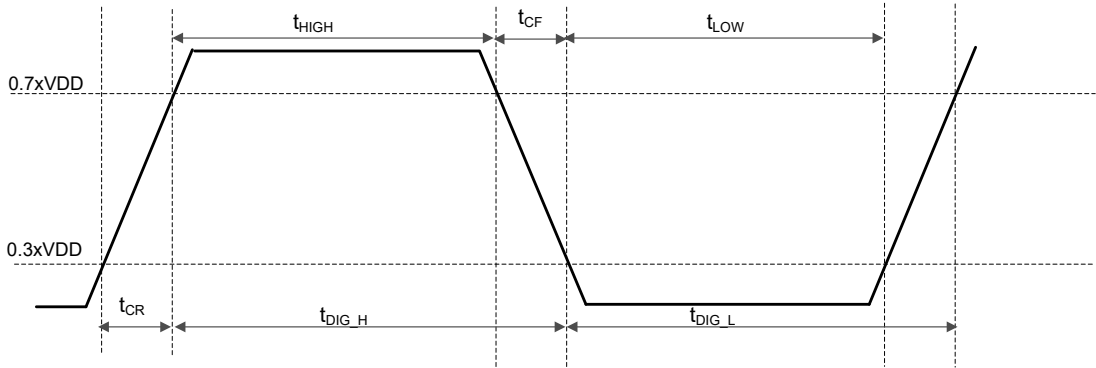


Figure 40. t_{DIG_H} and t_{DIG_L}

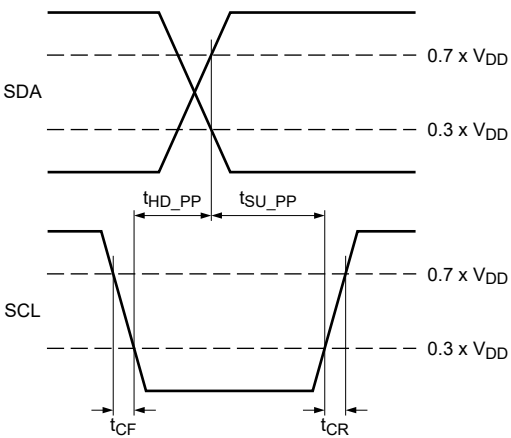


Figure 41. Controller out timing

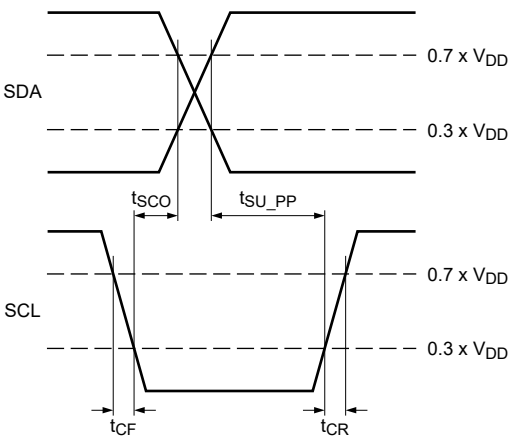


Figure 42. Target out timing

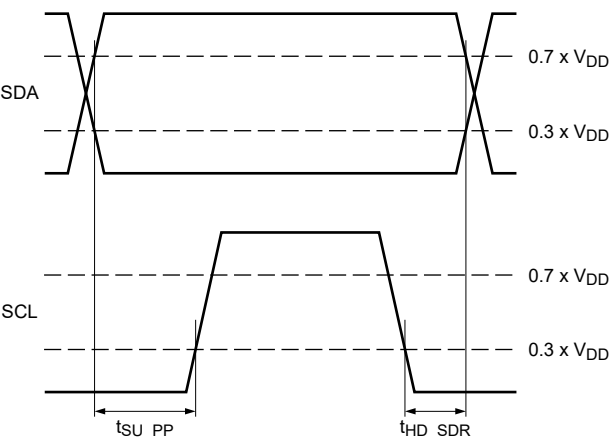


Figure 43. Controller SDR timing

4.8.4 Ultra High Speed SD/SDIO/MMC Host Interface (uSDHC) AC timing

This section describes the electrical information of the uSDHC, which includes SD/eMMC5.1 (single data rate) timing, eMMC5.1/SD3.0 (dual data rate) timing and SDR50/SDR104 AC timing.

4.8.4.1 SD3.0/eMMC4.3 (Single Data Rate) specifications

Figure 44 depicts the timing of SD3.0/eMMC4.3, and Table 80 lists the SD/eMMC4.3 timing characteristics.

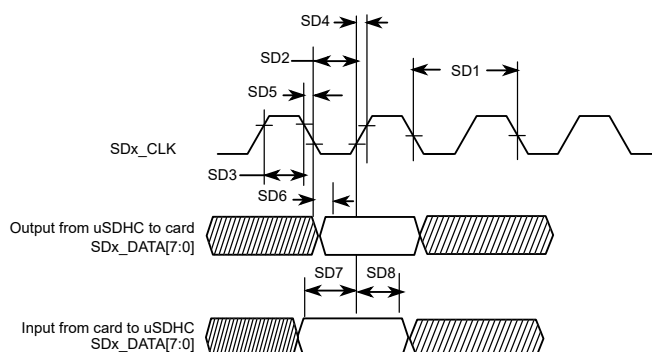


Figure 44. SD/eMMC4.3 timing

Table 80. SD/eMMC4.3 interface timing specification

ID	Parameter	Symbols	Min	Max	Unit
Card Input Clock					
SD1	Clock Frequency (Low Speed)	f_{PP}^1	0	400	kHz
	Clock Frequency (SD/SDIO Full Speed/High Speed)	f_{PP}^2	0	25/50	MHz
	Clock Frequency (MMC Full Speed/High Speed) Push-pull	f_{PP}^3	0	20/52	MHz
	Clock Frequency (Identification Mode) Open-drain	f_{OD}	100	400	kHz
SD2	Clock Low Time	t_{WL}	7	—	ns
SD3	Clock High Time	t_{WH}	7	—	ns
SD4	Clock Rise Time	t_{TLH}	—	3	ns
SD5	Clock Fall Time	t_{THL}	—	3	ns
uSDHC Output/Card Inputs SD_CMD, SDx_DATAx (Reference to CLK)					
SD6	uSDHC Output Delay	t_{OD}	-6.6	3.6	ns
uSDHC Input/Card Outputs SD_CMD, SDx_DATAx (Reference to CLK)					
SD7	uSDHC Input Setup Time	t_{ISU}	2	—	ns
SD8	uSDHC Input Hold Time ⁴	t_{IH}	1.5	—	ns

1. In low speed mode, card clock must be lower than 400 kHz, voltage ranges from 2.7 to 3.6 V.
2. In normal (full) speed mode for SD/SDIO card, clock frequency can be any value between 0–25 MHz. In high-speed mode, clock frequency can be any value between 0–50 MHz.
3. In normal (full) speed mode for MMC card, clock frequency can be any value between 0–20 MHz. In high-speed mode, clock frequency can be any value between 0–52 MHz.
4. To satisfy hold timing, the delay difference between clock input and cmd/data input must not exceed 2 ns.

4.8.4.2 eMMC4.4/4.41/SD3.0 (Dual Data Rate) AC timing

Figure 45 depicts the timing of eMMC4.4/4.41/SD3.0. Table 81 lists the eMMC4.4/4.41/SD3.0 timing characteristics. Be aware that only DATA is sampled on both edges of the clock (not applicable to CMD).

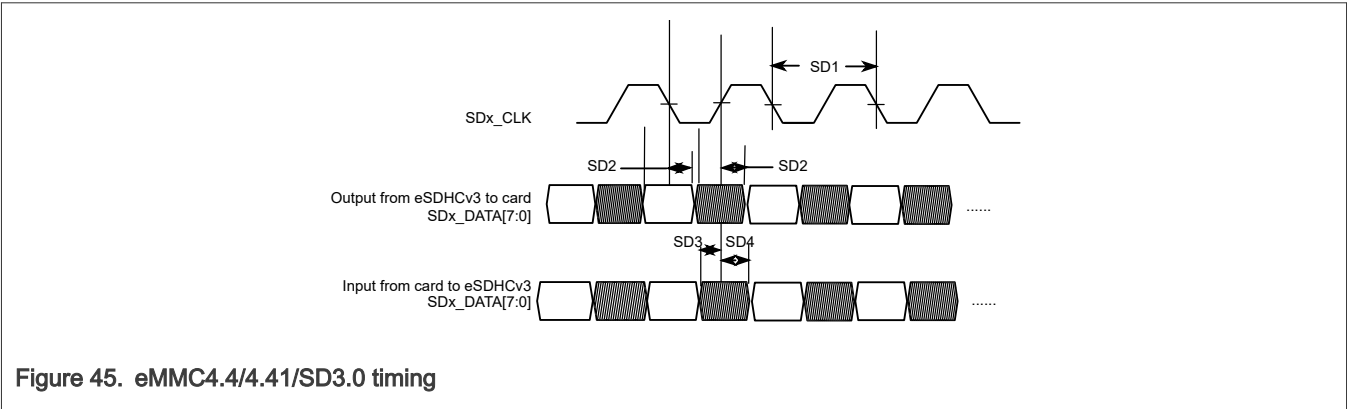


Figure 45. eMMC4.4/4.41/SD3.0 timing

Table 81. eMMC4.4/4.41/SD3.0 interface timing specification

ID	Parameter	Symbols	Min	Max	Unit
Card Input Clock					
SD1	Clock Frequency (eMMC4.4/4.41 DDR)	f_{PP}	0	52	MHz
SD1	Clock Frequency (SD3.0 DDR)	f_{PP}	0	50	MHz
uSDHC Output / Card Inputs SD_CMD, SDx_DATAx (Reference to CLK)					
SD2	uSDHC Output Delay	t_{OD}	2.8	6.8	ns
uSDHC Input / Card Outputs SD_CMD, SDx_DATAx (Reference to CLK)					
SD3	uSDHC Input Setup Time	t_{ISU}	2.4	—	ns
SD4	uSDHC Input Hold Time	t_{IH}	1.2	—	ns

4.8.4.3 SDR50/SDR104 AC timing

Figure 46 depicts the timing of SDR50/SDR104, and Table 82 lists the SDR50/SDR104 timing characteristics.

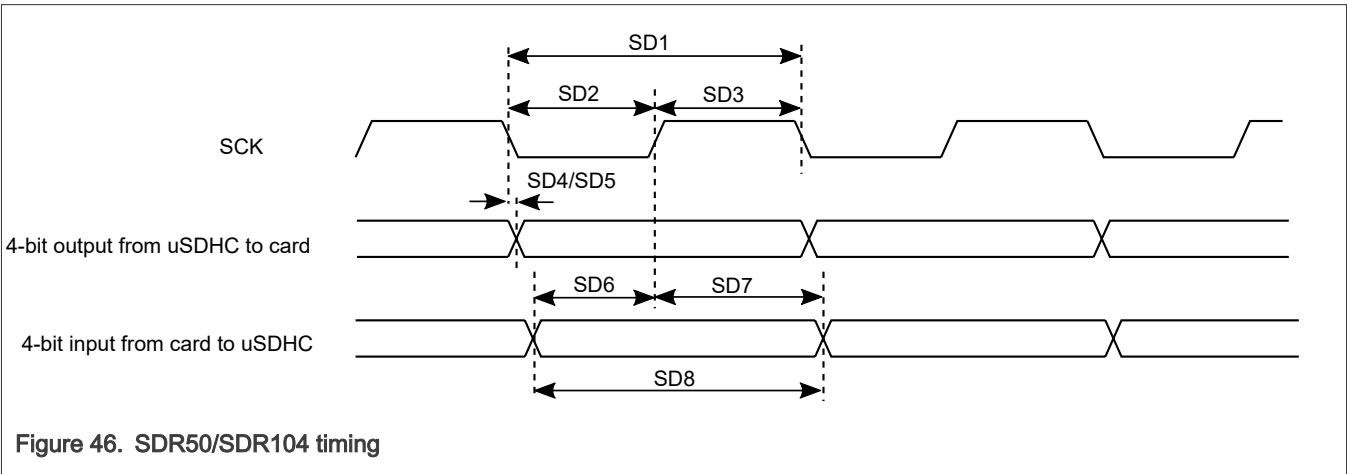


Figure 46. SDR50/SDR104 timing

Table 82. SDR50/SDR104 interface timing specification

ID	Parameter	Symbols	Min	Max	Unit
Card Input Clock					
SD1	Clock Frequency Period	t_{CLK}	5.0	—	ns
SD2	Clock Low Time	t_{CL}	$0.46 \times t_{CLK}$	$0.54 \times t_{CLK}$	ns
SD3	Clock High Time	t_{CH}	$0.46 \times t_{CLK}$	$0.54 \times t_{CLK}$	ns
uSDHC Output/Card Inputs SD_CMD, SDx_DATAx in SDR50 (Reference to CLK)					
SD4	uSDHC Output Delay	t_{OD}	–3	1	ns
uSDHC Output/Card Inputs SD_CMD, SDx_DATAx in SDR104 (Reference to CLK)					
SD5	uSDHC Output Delay	t_{OD}	–1.6	1	ns
uSDHC Input/Card Outputs SD_CMD, SDx_DATAx in SDR50 (Reference to CLK)					
SD6	uSDHC Input Setup Time	t_{ISU}	2.5	—	ns
SD7	uSDHC Input Hold Time	t_{IH}	1.5	—	ns
uSDHC Input/Card Outputs SD_CMD, SDx_DATAx in SDR104 (Reference to CLK)¹					
SD8	Card Output Data Window	t_{ODW}	$0.5 \times t_{CLK}$	—	ns

1. Data window in SDR104 mode is variable.

4.8.4.4 HS200 mode timing

Figure 47 depicts the timing of HS200 mode, and Table 83 lists the HS200 timing characteristics.

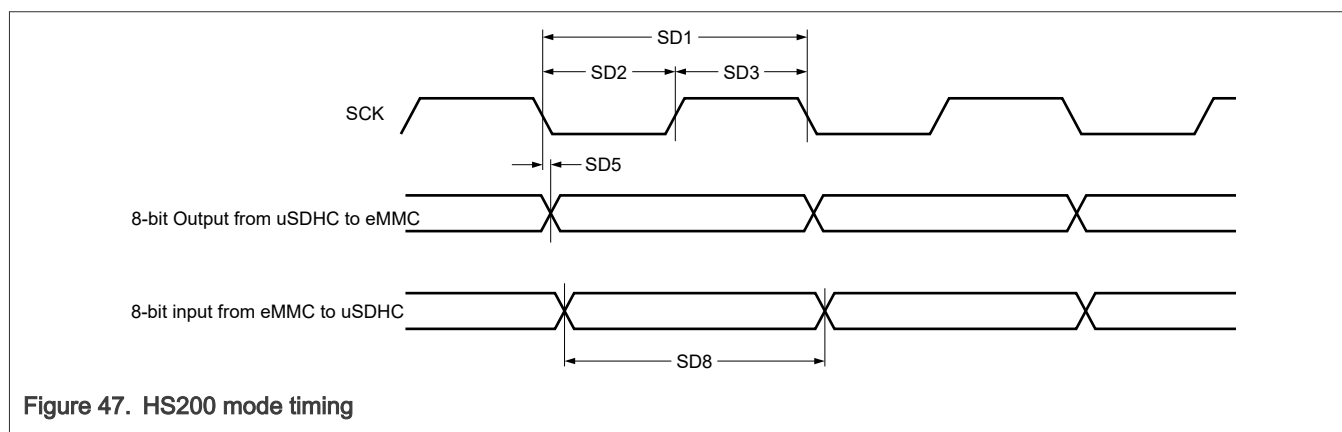


Table 83. HS200 interface timing specification

ID	Parameter	Symbols	Min	Max	Unit
Card Input Clock					

Table continues on the next page...

Table 83. HS200 interface timing specification ...continued

ID	Parameter	Symbols	Min	Max	Unit
SD1	Clock Frequency Period	t_{CLK}	5.0	—	ns
SD2	Clock Low Time	t_{CL}	$0.46 \times t_{CLK}$	$0.54 \times t_{CLK}$	ns
SD3	Clock High Time	t_{CH}	$0.46 \times t_{CLK}$	$0.54 \times t_{CLK}$	ns
uSDHC Output/Card Inputs SD_CMD, SDx_DATAx in HS200 (Reference to CLK)					
SD5	uSDHC Output Delay	t_{OD}	-1.6	0.74	ns
uSDHC Input/Card Outputs SD_CMD, SDx_DATAx in HS200 (Reference to CLK)¹					
SD8	Card Output Data Window	t_{ODW}	$0.5 \times t_{CLK}$	—	ns

1. HS200 is for 8 bits while SDR104 is for 4 bits.

4.8.4.5 HS400 specifications - eMMC 5.0 only

Be aware that only data are sampled on both edges of the clock (not applicable to CMD). The CMD input/output timing for HS400 mode is the same as CMD input/output timing for HS200 mode. Check SD5 and SD8 parameters in the HS200 interface timing specifications table for CMD input/output timing of HS400 mode.

Table 84 lists the HS400 timing specifications.

Table 84. HS400 interface timing specification

Symbol	Description	Min	Max	Unit
	Operating voltage	1.71	1.95	V
Card input clock				
	Clock frequency	0	200	MHz
SD1	Clock period	5.0	—	ns
SD2	Clock Low time	$0.46 \times SD1$	$0.54 \times SD1$	ns
SD3	Clock High time	$0.46 \times SD1$	$0.54 \times SD1$	ns
SDHC output / card Inputs SDHC_CMD, SDHC_Dn (reference to SDHC_CLK)				
SD4	Output skew from data to edge of SCK	0.45	—	ns
SD5	Output skew from edge of SCK to data	0.45	—	ns
SDHC input / card outputs (reference to strobe)				
SD6	SDHC input skew	—	0.45	ns
SD7	SDHC hold skew	—	0.45	ns

Figure 48 depicts the timing of HS400.

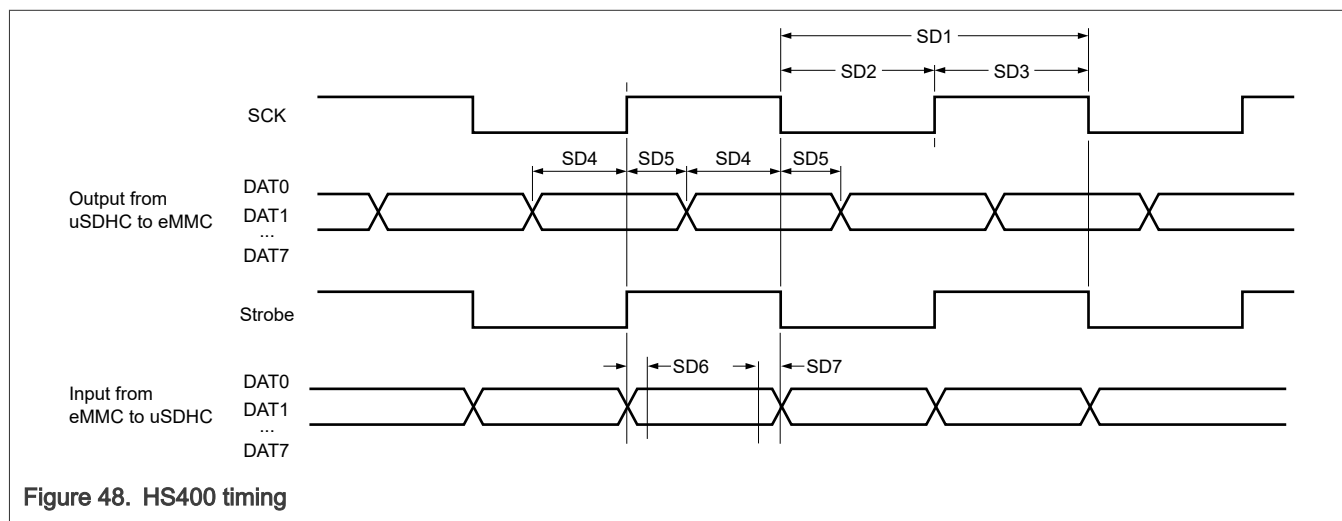


Figure 48. HS400 timing

4.8.4.6 Bus operation condition for 3.3 V and 1.8 V signaling

Signaling level of SD/eMMC4.3 and eMMC4.4/4.41 modes is 3.3 V. Signaling level of SDR104/SDR50/HS200/HS400 mode is 1.8 V.

4.8.5 Network AC electrical specifications

This section describes MII, RMII, RGMII, 1588 and management interface timing parameters.

4.8.5.1 ENET MII mode timing

Table 85 describes the MII timing parameters.

Table 85. MII timing Parameters

Symbol	Description	Min.	Typ	Max.	Unit	Condition	Spec number
tCYC_RX	RX_CLK period	—	40 / 400	—	ns	10/100 Mbps	—
ΔtCYC_RX	RX_CLK duty cycle (tPWH / tCYC)	45	—	55	%	—	—
tS	Input setup time to RX_CLK	5	—	—	ns	10/100 Mbps	—
tH	Input hold time to RX_CLK ¹	5	—	—	ns	10/100 Mbps	—
tCYC_TX	TX_CLK period	—	40 / 400	—	ns	10/100 Mbps	—
ΔtCYC_TX	TX_CLK duty cycle (tPWH / tCYC) ²	45	—	55	%	—	—
tD	Output delay from TX_CLK ²	2	—	25	ns	10/100 Mbps	—

1. Input timing assumes an input signal slew rate of 3 ns (20%/80%).

2. Output timing valid for maximum external load $CL = 25\text{ pF}$, which is assumed to be a 10 pF load at the end of a 50 Ohm , un-terminated, 5-inch microstrip trace on standard FR4 (1.5 pF/inch), (25 pF total with margin). For best signal integrity, the series resistance of the transmission line should be matched closely to the $R_{DS(on)}$ of the I/O pad output driver.

Figure 49 shows MII receive timing.


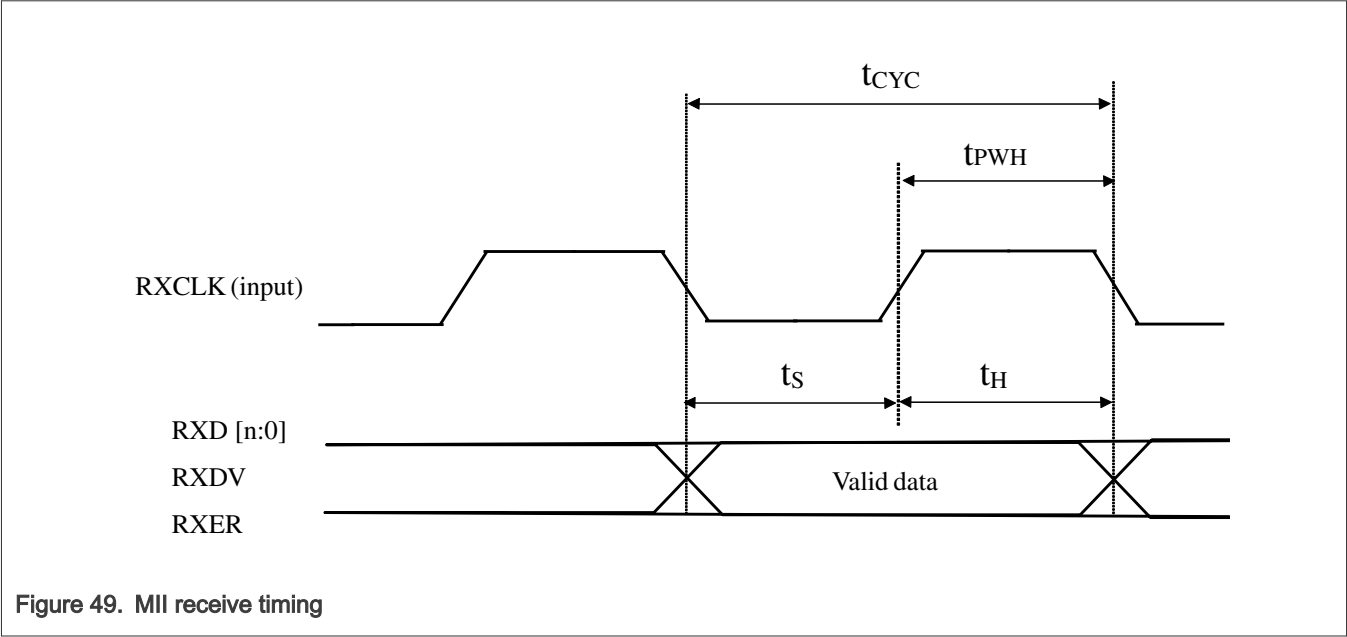


Figure 50 shows MII transmit timing.

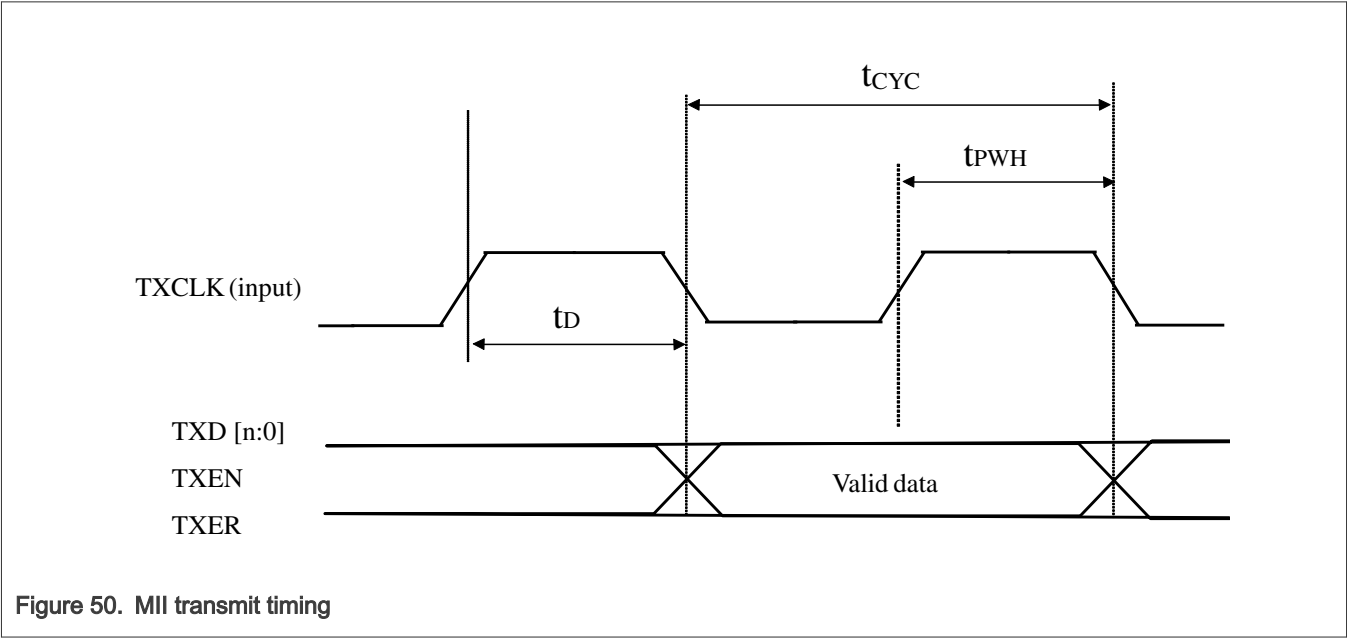

4.8.5.2 RMII mode timing

Table 86 describes the RMII timing parameters.

Table 86. RMII timing Parameters

Symbol	Description	Min.	Typ	Max.	Unit	Condition	Spec number
fRMII_CLK	RMII input clock frequency (RMII_CLK)	—	—	50	MHz	—	—
ΔtRMII_CLK	RMII_CLK duty cycle (tPWH / tCYC)	35	—	65	%	—	E3, E4, E7, E8
tS	RXD[1:0], CRS_DV, RXER to RMII_CLK setup time	4	—	—	ns	—	E1
tH	RMII_CLK to RXD[1:0], CRS_DV, RXER hold time ¹	2	—	—	ns	—	E2
tDATA_VALID	RMII_CLK to TXD[1:0], TXN data valid	—	—	14	ns	CLOAD = 25 pF	E6
tDATA_INVALID	RMII_CLK to TXD[1:0], TXN data invalid ²	2	—	—	ns	CLOAD = 25 pF	E5

- 1. Input timing assumes an input signal slew rate of 3 ns (20%/80%).
- 2. Output timing valid for maximum external load CL = 25 pF, which is assumed to be a 10 pF load at the end of a 50 Ohm, un-terminated, 5-inch microstrip trace on standard FR4 (1.5 pF/inch), (25 pF total with margin). For best signal integrity, the series resistance of the transmission line should be matched closely to the RDSON of the I/O pad output driver.

Figure 51 shows RMII receive timing.

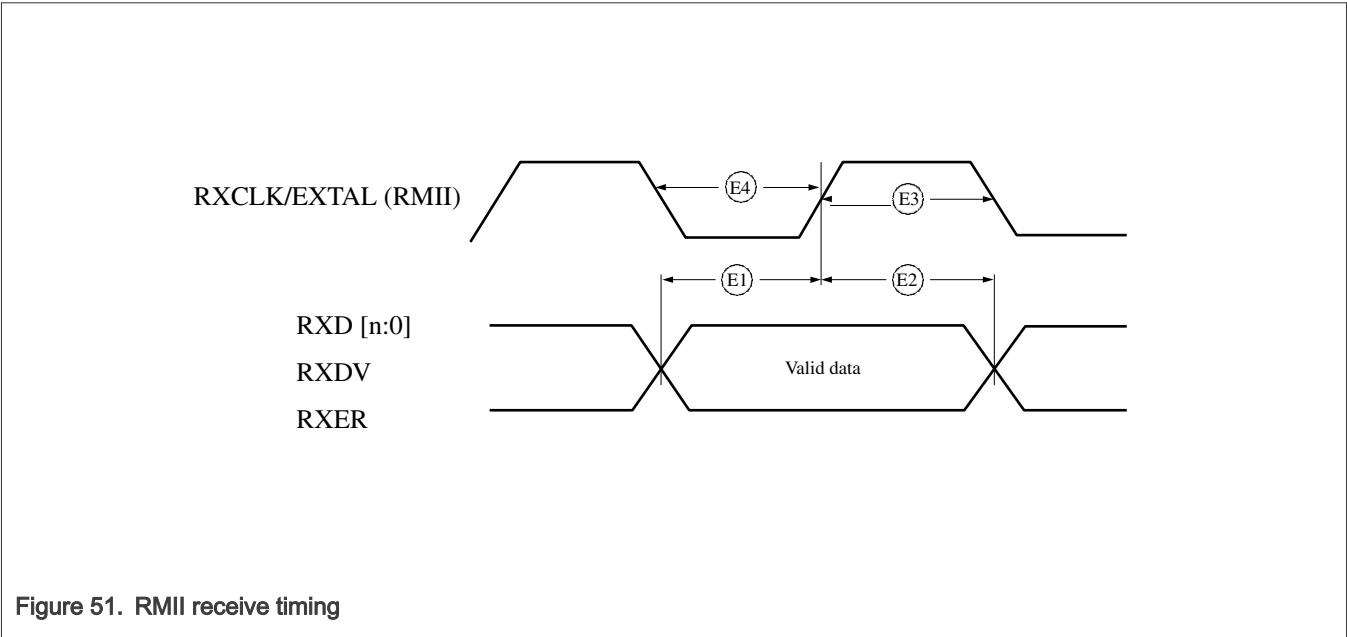


Figure 51. RMII receive timing

Figure 52 shows RMII transmit timing.

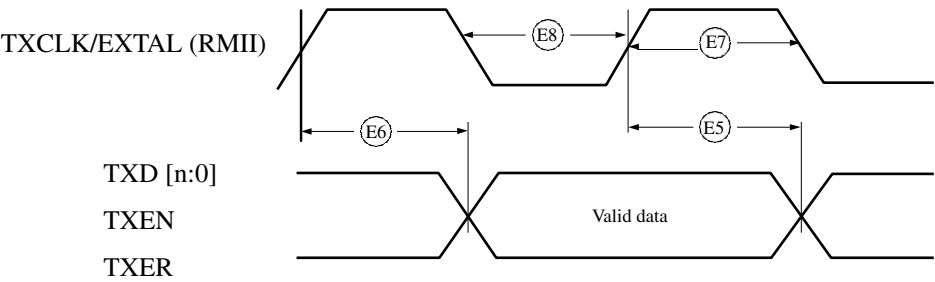


Figure 52. RMII transmit timing

4.8.5.3 RGMII mode timing

Table 87 describes the RGMII timing parameters.

Table 87. RGMII timing Parameters

Symbol	Description	Min.	Typ	Max.	Unit	Condition	Spec number
T _{CYC}	Clock cycle duration ^{1,...}	7.2	—	8.8	ns	—	—
T _{skewT}	Data to clock output skew (at transmitter) ^{2,3,4,5}	-500	—	500	ps	—	—
T _{skewR}	Data to clock output skew (at receiver) ^{2,4}	1	—	2.6	ns	—	—
Duty_G	Clock duty cycle for Gigabit ^{2,4}	45	—	55	%	—	—
Duty_T	Clock duty cycle for 10/100T ^{2,4,6}	40	—	60	%	—	—

- 1. For 10 Mbps and 100 Mbps, T_{cyc} will scale to 400 ns ±40 ns and 40 ns ±4 ns respectively.
- 2. Measured as defined in EIA/JESD 8-6 1995 with a timing threshold voltage of VDDQ/2
- 3. Output timing valid for maximum external load CL = 15 pF, which is assumed to be a 8 pF load at the end of a 50 Ω, un-terminated, 2 inch microstrip trace on standard FR4 (1.5 pF/inch). For best signal integrity, the series resistance of the transmission line should be matched closely to the selected RDSON of the I/O pad output driver.
- 4. RGMII timing specifications are valid for both 1.8 V and 3.3 V nominal I/O pad supply voltage.
- 5. For all versions prior to RGMII v2.0 specifications; This implies that PC board design will require clocks to be routed such that an additional delay of greater than 1.5 ns and less than 2 ns will be added to the associated clock signal. For 10/100, the max value is unspecified.
- 6. Duty cycle may be stretched/shrunk during speed changes or while transitioning to a received packet's clock domain as long as minimum duty cycle is not violated and stretching occurs for no more than three T_{cyc} of the lowest speed transitioned between.

Figure 53 shows RGMII receive timing.

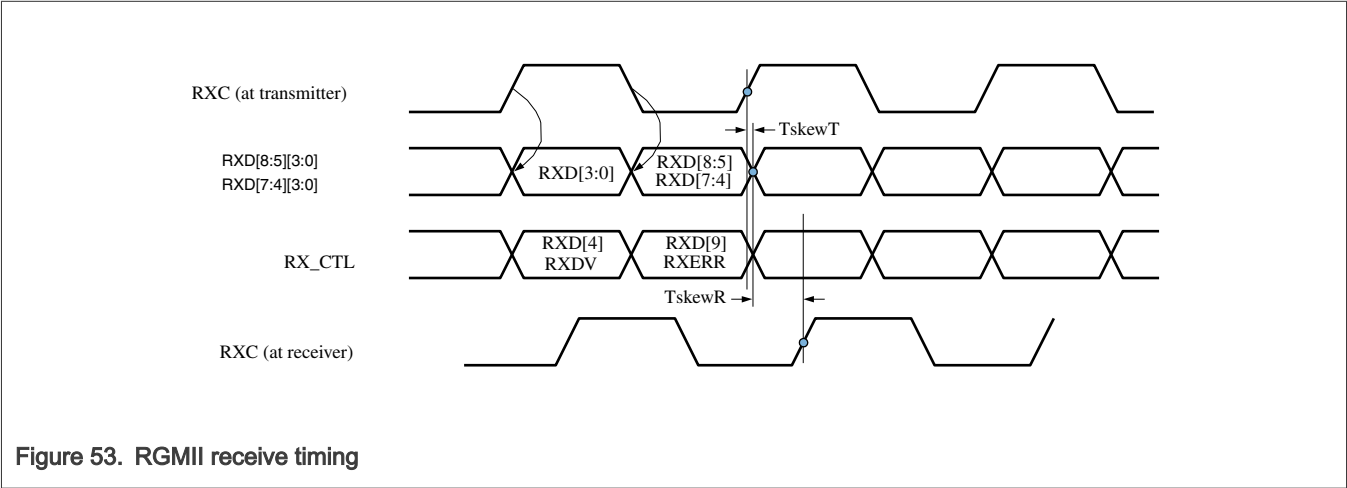


Figure 53. RGMII receive timing

Figure 54 shows RGMII transmit timing.

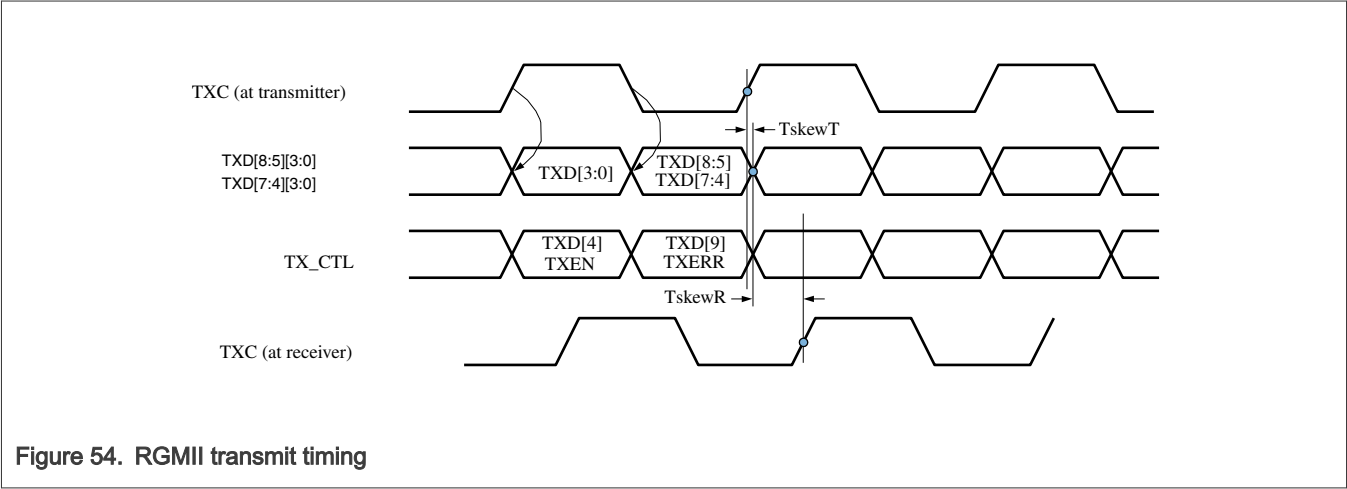


Figure 54. RGMII transmit timing

4.8.5.4 NETC 1588 specifications

Table 88 describes the NETC 1588 timing parameters.

Table 88. NETC 1588 timing Parameters

Symbol	Description	Min.	Typ	Max.	Unit	Condition	Spec number
tT1588CLK	TMR_1588_CLK_IN clock period	5	—	—	ns	—	—
tT1588CLKL/ tT1588CLK	TMR_1588_CLK_IN duty cycle	40	50	60	%	—	—
tT1588CLKINJ	TMR_1588_CLK_IN peak-to-peak jitter	—	—	250	ps	—	—

Table continues on the next page...

Table 88. NETC 1588 timing Parameters ...continued

Symbol	Description	Min.	Typ	Max.	Unit	Condition	Spec number
tT1588CLKINR	Rise time TMR_1588_CLK_IN (20% to 80%)	1.0	—	2.0	ns	—	—
tT1588CLKINF	Fall time TMR_1588_CLK_IN (80% to 20%)	1.0	—	2.0	ns	—	—
tT1588CLKOUT	TMR_1588_CLK_OUT clock period	2 x t1588CLK	—	—	ns	—	—
tT1588CLKOTH/ tT1588CLKOUT	TMR_1588_CLK_OUT duty cycle	30.0	50.0	70.0	%	—	—
tT1588TRIGH	TMR_1588_TRIG_IN1/2 pulse width	2 x t1588CLK	—	—	ns	—	—

Figure 55 shows NETC 1588 input AC timing.

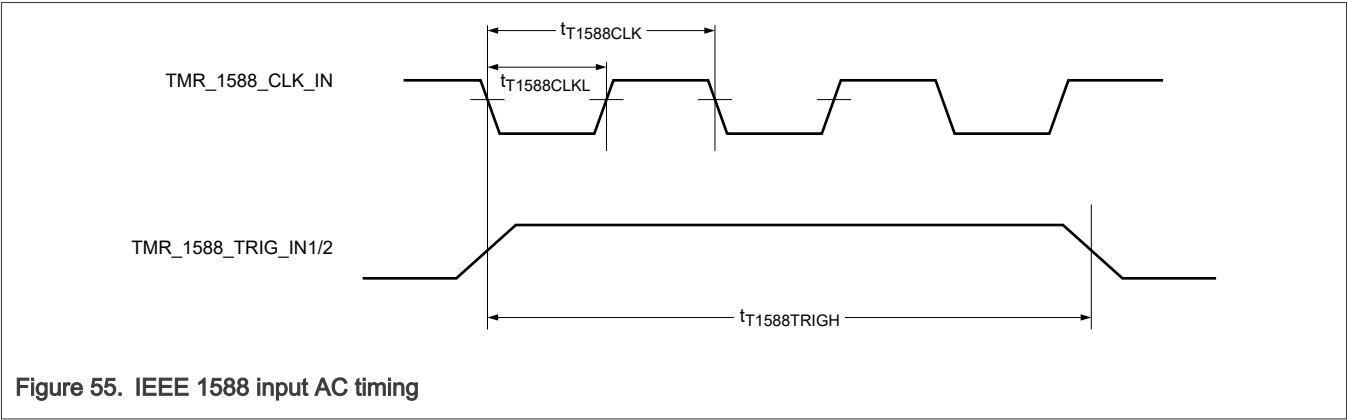


Figure 55. IEEE 1588 input AC timing

Figure 56 shows NETC 1588 output AC timing.

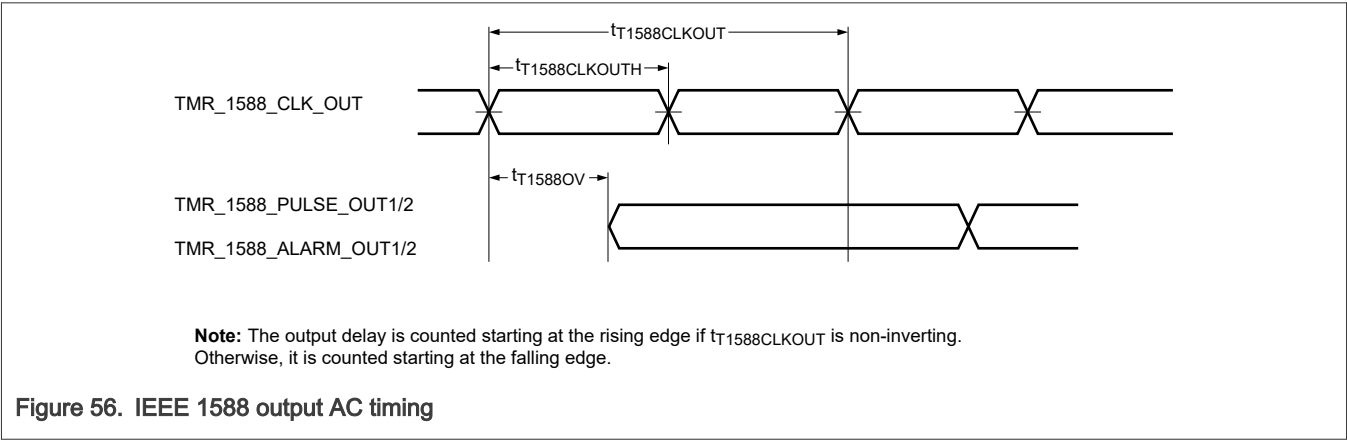


Figure 56. IEEE 1588 output AC timing

4.8.5.5 NETC management specifications

Table 89 describes the NETC management timing parameters.

Table 89. NETC management timing Parameters

Symbol	Description	Min.	Typ	Max.	Unit	Condition	Spec number
fMDC	MDC clock frequency	—	—	5	MHz	—	—
MDIO_CH	MDC pulse width high time	40	—	60	%	—	MDC14
MDIO_CL	MDC pulse width low time	40	—	60	%	—	MDC15
tMDKHDX	MDC to MDIO delay ¹	$(Y + 5) \times \text{tenet_clk} - 4$	—	$(Y + 5) \times \text{tenet_clk} + 4$	ns	—	—
MDIO_ISU	MDIO (input) to MDC rising edge setup time	8	—	—	ns	—	MDC12
MDIO_IH	MDIO (input) to MDC rising edge hold time	0	—	—	ns	—	MDC13

1. tenet_clk is NETC system clock. Y is the value programmed to adjust hold time by EMDIO_CFG[MDIO_HOLD].

Figure 57 shows MDC / MDIO timing.

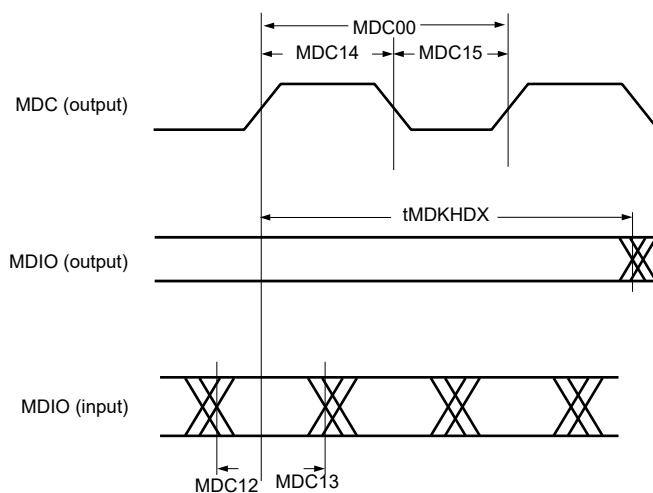


Figure 57. MDC / MDIO timing

4.8.5.6 Ethernet Time Sensitive Networking (TSN) electrical specifications

The following timing specs are defined at the chip I/O pin and must be translated appropriately to arrive at timing specs/constraints for the physical interface.

It also supports the following TSN features:

- 802.1AS Timing and Synchronization

- 802.1CB (switch only) Frame Replication and Elimination for Reliability (FRER)
- 802.1Qav Forwarding and Queuing Enhancements for Time Sensitive Streams
- 802.1Qbu Frame preemption
- 802.1Qbv Enhancements to Scheduling Traffic
- 802.1Qch Cyclic Queuing and Forwarding (CQF)
- 802.1Qci Per Stream Filtering and Policing (PSFP)
- Time based Scheduling

4.8.5.7 EtherCAT

4.8.5.7.1 ENET MII mode timing

This subsection describes MII receive, transmit, asynchronous inputs, and serial management signal timings.

4.8.5.7.2 MII receive signal timing (ENET_RX_DATA3,2,1,0, ENET_RX_EN, ENET_RX_ER, and ENET_RX_CLK)

The receiver functions correctly up to an ENET_RX_CLK maximum frequency of 25 MHz + 1%. There is no minimum frequency requirement. Additionally, the processor clock frequency must exceed twice the ENET_RX_CLK frequency.

Figure 58 shows MII receive signal timings. Table 90 describes the timing parameters (M1–M4) shown in the figure.

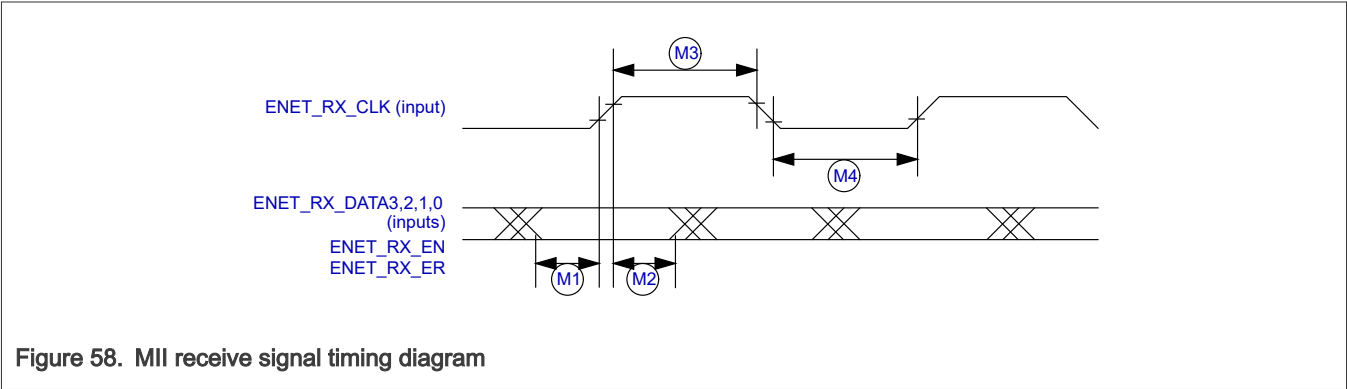


Table 90. MII receive signal timing

ID	Characteristic ¹	Min.	Max.	Unit
M1	ENET_RX_DATA3,2,1,0, ENET_RX_EN, ENET_RX_ER to ENET_RX_CLK setup	5	—	ns
M2	ENET_RX_CLK to ENET_RX_DATA3,2,1,0, ENET_RX_EN, ENET_RX_ER hold	5	—	ns
M3	ENET_RX_CLK pulse width high	35%	65%	ENET_RX_CLK period
M4	ENET_RX_CLK pulse width low	35%	65%	ENET_RX_CLK period

1. ENET_RX_EN, ENET_RX_CLK, and ENET0_RXD0 have the same timing in 10 Mbps 7-wire interface mode.

4.8.5.7.3 MII transmit signal timing (ENET_TX_DATA3,2,1,0, ENET_TX_EN, ENET_TX_ER, and ENET_TX_CLK)

The transmitter functions correctly up to an ENET_TX_CLK maximum frequency of 25 MHz + 1%. There is no minimum frequency requirement. Additionally, the processor clock frequency must exceed twice the ENET_TX_CLK frequency.

Figure 59 shows MII transmit signal timings. Table 91 describes the timing parameters (M5–M8) shown in the figure.

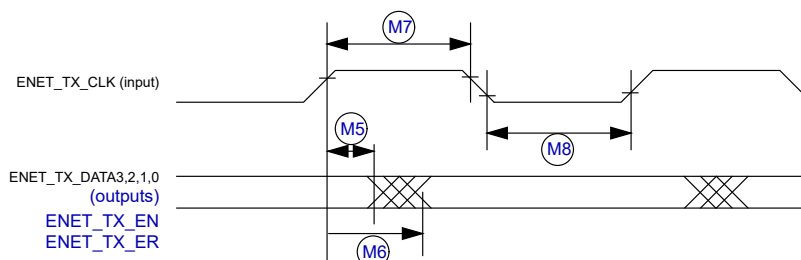


Figure 59. MII transmit signal timing diagram

Table 91. MII transmit signal timing

ID	Characteristic ¹	Min.	Max.	Unit
M5	ENET_TX_CLK to ENET_TX_DATA3,2,1,0, ENET_TX_EN, ENET_TX_ER invalid	5	—	ns
M6	ENET_TX_CLK to ENET_TX_DATA3,2,1,0, ENET_TX_EN, ENET_TX_ER valid	—	20	ns
M7	ENET_TX_CLK pulse width high	35%	65%	ENET_TX_CLK period
M8	ENET_TX_CLK pulse width low	35%	65%	ENET_TX_CLK period

1. ENET_TX_EN, ENET_TX_CLK, and ENET0_TXD0 have the same timing in 10-Mbps 7-wire interface mode.

4.8.5.7.4 MII asynchronous inputs signal timing (ENET_CRS and ENET_COL)

Figure 60 shows MII asynchronous inputs timings. Table 92 describes the timing parameter (M9) shown in the figure.




Figure 60. MII asynchronous inputs timing diagram

Table 92. MII asynchronous inputs signal timing

ID	Characteristic	Min.	Max.	Unit
M9	ENET_CRS and ENET_COL minimum pulse width	1.5	—	ENET_TX_CLK period

4.8.5.7.5 MII serial management channel timing (ENET_MDIO and ENET_MDC)

The MDC frequency is designed to be equal to or less than 2.5 MHz to be compatible with the IEEE 802.3 MII specification. However the ENET can function correctly with a maximum MDC frequency of 15 MHz.

Figure 61 shows MII serial management channel timings. Table 93 describes the timing parameters (M10–M15) shown in the figure.

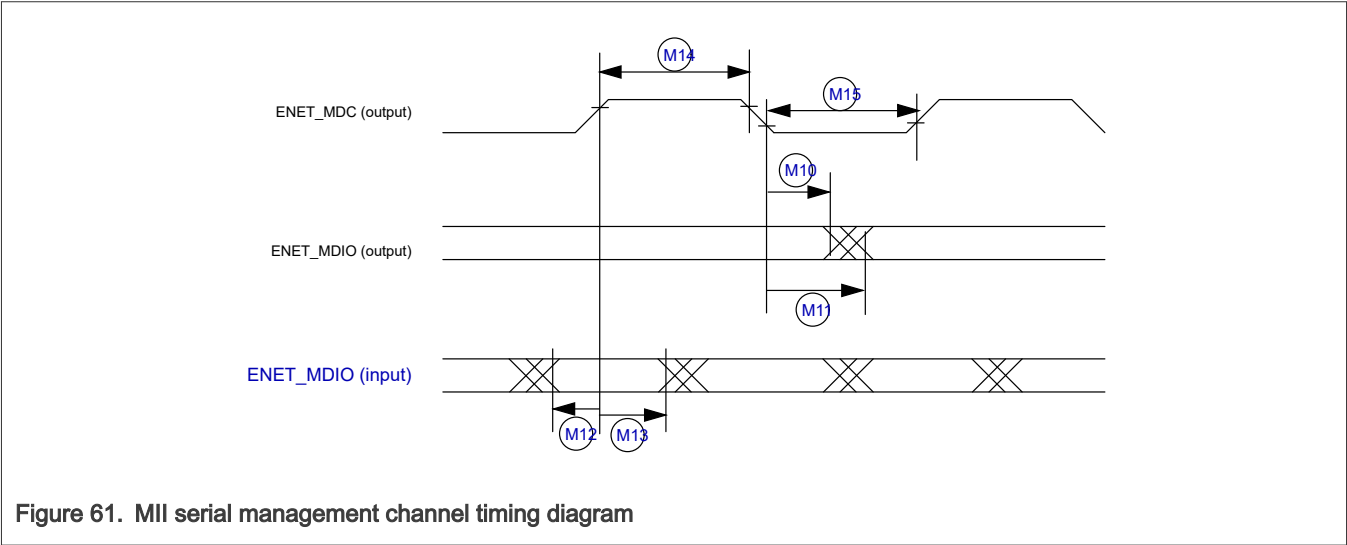


Table 93. MII serial management channel timing

ID	Characteristic	Min.	Max.	Unit
M10	ENET_MDC falling edge to ENET_MDIO output invalid (min. propagation delay)	0	—	ns
M11	ENET_MDC falling edge to ENET_MDIO output valid (max. propagation delay)	—	5	ns
M12	ENET_MDIO (input) to ENET_MDC rising edge setup	18	—	ns
M13	ENET_MDIO (input) to ENET_MDC rising edge hold	0	—	ns
M14	ENET_MDC pulse width high	40%	60%	ENET_MDC period
M15	ENET_MDC pulse width low	40%	60%	ENET_MDC period

4.8.5.8 RMII mode timing

Please refer to [RMII mode timing](#).

4.8.6 Controller Area Network (CAN) AC electrical specifications

The Controller Area Network (CAN) module is a communication controller implementing the CAN protocol according to the CAN with Flexible Data rate (CAN FD) protocol and the CAN 2.0B protocol specification. See the IOMUXC chapter of the device reference manual to see which pins expose Tx and Rx pins; these ports are named CAN_TX and CAN_RX, respectively.

Please refer to [General purpose I/O \(GPIO\) AC parameters](#).

4.8.7 LPUART electrical specifications

Please refer to [General purpose I/O \(GPIO\) AC parameters](#).

4.8.8 GPIO electrical specifications

Please refer to [General purpose I/O \(GPIO\) AC parameters](#).

4.8.9 Flexible I/O controller (FlexIO) electrical specifications

[Table 94](#) shows FlexIO timing specifications.

Table 94. FlexIO timing specifications

Symbol	Descriptions	Min	Typ	Max	Unit	Notes
t_{ODS}	Output delay skew between any two FlexIO_Dx pins configured as outputs that toggle on same internal clock cycle	0	—	10	ns	
t_{IDS}	Input delay skew between any two FlexIO_Dx pins configured as inputs that are sampled on the same internal clock cycle	0	—	10	ns	¹

1. Assume pins muxed on same VDD_IO domain with same load.

4.8.10 USB PHY parameters

This section describes the USB-OTG PHY parameters.

The USB PHY meets the electrical compliance requirements defined in the Universal Serial Bus Revision 2.0 OTG with the following amendments.

- USB ENGINEERING CHANGE NOTICE
 - Title: 5 V Short Circuit Withstand Requirement Change
 - Applies to: Universal Serial Bus Specification, Revision 2.0
- Errata for USB Revision 2.0 April 27, 2000 as of 12/7/2000
- USB ENGINEERING CHANGE NOTICE
 - Title: Pull-up/Pull-down resistors
 - Applies to: Universal Serial Bus Specification, Revision 2.0
- USB ENGINEERING CHANGE NOTICE
 - Title: Suspend Current Limit Changes
 - Applies to: Universal Serial Bus Specification, Revision 2.0
- USB ENGINEERING CHANGE NOTICE
 - Title: USB 2.0 Phase Locked SOFs
 - Applies to: Universal Serial Bus Specification, Revision 2.0
- On-The-Go and Embedded Host Supplement to the USB Revision 2.0 Specification
 - Revision 2.0 plus errata and ecn June 4, 2010
- Battery Charging Specification (available from USB-IF)
 - Revision 1.2, December 7, 2010
 - Portable device only

4.8.11 Timers

This section provide information on timers.

4.8.11.1 Pulse Width Modulator (PWM) characteristics

This section describes the electrical information of the PWM.

Table 95. PWM timing parameters

Parameter	Min	Typ	Max	Unit
PWM Clock Frequency	—	—	133	MHz
Output skew	—	—	2	ns


4.8.11.2 Quad Timer timing

Table 96 lists the Quad Timer parameters.

Table 96. Quad Timer timing

Characteristic	Symbol	Min	Max	Unit	See Figure
Maximum frequency	f	—	133	MHz	—
Timer input period	T _{IN}	2T ¹ + 6	—	ns	—
Timer input high/low period	T _{INHL}	1T + 3	—	ns	—
Timer output period	T _{OUT}	30	—	ns	—
Timer output high/low period	T _{OUTHL}	15	—	ns	—

1. T = 1000/f

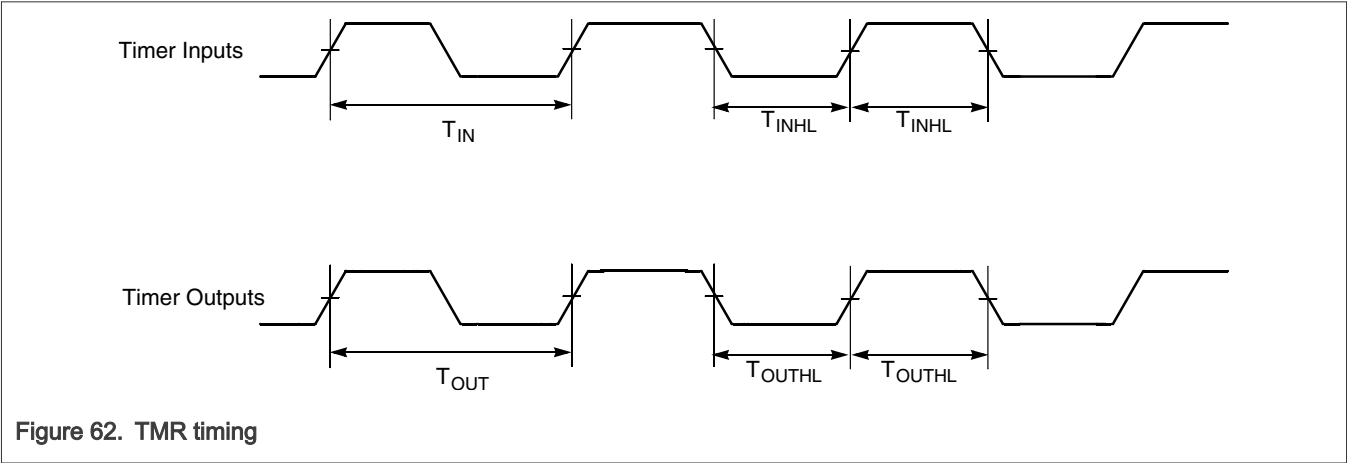

4.8.11.3 LPTMR characteristics

This section describes the characteristics of LPTMR.

Table 97. LPTMR timing parameters

Parameter	Symbol	Min	Typ	Max	Unit
Clock Frequency	f	—	—	80	MHz

4.8.12 BBSM

This section provides parameters of BBSM.

4.8.12.1 BBSM tamper

Table 98 lists the DC specification of BBSM tamper.

Table 98. DC specification of BBSM tamper

Parameter	Symbol	Min	Typ ¹	Max	Unit	Condition
High level input voltage	V _{IH}	0.7 x NVCC_BBSM	—	NVCC_BBSM + 0.1	V	—
Low level input voltage	V _{IL}	-0.3	—	0.3 x NVCC_BBSM	V	—
Output high current	I _{OH}	—	-45	—	μA	V _{OH} = NVCC_BBSM - 0.3
Output low current	I _{OL}	—	50	—	μA	V _{OL} = 0.3
Weak pull-up and pull-down						
Pull-up and pull-down resistance	R _{PU} / R _{PD}	—	200	—	kΩ	—

1. Typical numbers are not guaranteed.

Table 99 lists the BBSM tamper specifications.

Table 99. BBSM tamper specifications

Parameters	Min	Typ	Max	Unit
High Temp Tamper	125	130	135	°C
Low Temp Tamper	-40	-30	-20	°C
Low Temp Tamper (Shelf mode)	-60	-50	-40	°C
Vbat LVD tamper	2.25	2.325	2.4	V
Vbat HVD tamper	4.25	4.375	4.5	V
Regulator LVD tamper	1.48	1.58	1.68	V

Table continues on the next page...

Table 99. BBSM tamper specifications ...continued

Parameters	Min	Typ	Max	Unit
Regulator HVD tamper	1.86	1.96	2.06	V
Clock low freq tamper	15	20	25	kHz
Clock high freq tamper	40	52.5	80	kHz

5 Boot mode configuration

This section provides information on boot mode configuration pins allocation and boot devices interfaces allocation.

5.1 Boot mode configuration pins

Table 100 implements a compressed boot mode decode with 3 BOOT_MODE pins.

Table 100. Boot_MODE definition

BOOT_MODE[2:0]	Boot type
000	Boot from Internal Fuses
001	Serial Downloader
010	eMMC 8-bit via uSDHC2
011	SD 4-bit via uSDHC ¹
100	Serial NOR Flash with JESD216 via FlexSPI1, Primary group, PortA
101	Serial NAND Flash with 2K page via FlexSPI1, Primary group, PortA ²
110	Infinite Loop Modes
111	Test mode ³

1. Boot device, instance and bus width are fixed. The other options can be set by the values in the BOOT_CFG fuse words.
2. Boot device is fixed. The other options can be overwritten by the values in the BOOT_CFG fuse words, including instance, pin group, port, etc.
3. Test Mode is reserved for NXP usage only.

When booting from Internal Fuses, additional boot options are also supported:

- All boot modes supported for a range of speeds/timings/protocol formats
- eMMC and SD boot supported from any USDHC instance 1, 2 or 3 (if USDHC3 present in a given SoC)
- Serial NOR boot supported for 1-bit, 4-bit, and 8-bit mode
- Serial NAND boot supported for 1-bit, 4-bit, and 8-bit mode (8-bit Serial NAND)
- Assorted additional minor parameter options.

BOOT_MODE pins are multiplexed over other functional pins. The functional IO that are multiplexed with these pins must be selected subject to two criteria:

- Functional IO must not be used if they are inputs to the SoC which could potentially be constantly driven by external components. Such functional mode driving may interfere with the need for the board to pull these pins a certain way while POR is asserted.
- Functional IO must not be used if they are outputs of the SoC which will be connected to components on the board that may misinterpret the signals as valid signals if they toggle (such as when the board drives them while POR is asserted). Examples in this category include chip selects to memory devices that may be output of the SoC.

For detailed boot mode options configured by the boot mode pins, see the i.MX RT1180 Fuse Map and the System Boot chapter in *i.MX RT1180 Reference Manual* (IMXRT1180RM).

5.2 Boot device interface allocation

The following tables list the interfaces that can be used by the boot process in accordance with the specific boot mode configuration. The tables also describe the interface's specific modes and IOMUXC allocation, which are configured during boot when appropriate.

Table 101. Boot through NAND

PAD Name	IO Function	ALT	Comments
GPIO_EMC_B1_00	semc.DATA[0]	ALT 0	—
GPIO_EMC_B1_01	semc.DATA[1]	ALT 0	—
GPIO_EMC_B1_02	semc.DATA[2]	ALT 0	—
GPIO_EMC_B1_03	semc.DATA[3]	ALT 0	—
GPIO_EMC_B1_04	semc.DATA[4]	ALT 0	—
GPIO_EMC_B1_05	semc.DATA[5]	ALT 0	—
GPIO_EMC_B1_06	semc.DATA[6]	ALT 0	—
GPIO_EMC_B1_07	semc.DATA[7]	ALT 0	—
GPIO_EMC_B1_30	semc.DATA[8]	ALT 0	—
GPIO_EMC_B1_31	semc.DATA[9]	ALT 0	—
GPIO_EMC_B1_32	semc.DATA[10]	ALT 0	—
GPIO_EMC_B1_33	semc.DATA[11]	ALT 0	—
GPIO_EMC_B1_34	semc.DATA[12]	ALT 0	—
GPIO_EMC_B1_35	semc.DATA[13]	ALT 0	—
GPIO_EMC_B1_36	semc.DATA[14]	ALT 0	—
GPIO_EMC_B1_37	semc.DATA[15]	ALT 0	—
GPIO_EMC_B1_18	semc.ADDR[9]	ALT 0	—
GPIO_EMC_B1_19	semc.ADDR[11]	ALT 0	—

Table continues on the next page...

Table 101. Boot through NAND ...continued

GPIO_EMC_B1_20	semc.ADDR[12]	ALT 0	—
GPIO_EMC_B1_22	semc.BA1	ALT 0	—
GPIO_EMC_B1_41	semc.CSX[0]	ALT 0	—
GPIO_B1_00	semc.CSX[1]	ALT 2	—
GPIO_B1_01	semc.CSX[2]	ALT 2	—
GPIO_B2_00	semc.CSX[3]	ALT 1	—

Table 102. Boot through FlexSPI1 (QSPI/HyperFLASH)

PAD Name	IO Function	ALT	Comments
GPIO_SD_B2_00	flexspi1_bus2bit.B_DATA[4]	ALT 1	Port B Group 0
GPIO_SD_B2_01	flexspi1_bus2bit.B_DATA[5]	ALT 1	
GPIO_SD_B2_02	flexspi1_bus2bit.B_DATA[6]	ALT 1	
GPIO_SD_B2_03	flexspi1_bus2bit.B_DATA[7]	ALT 1	
GPIO_SD_B2_04	flexspi1_bus2bit.B_SS1_B	ALT 1	
GPIO_SD_B2_05	flexspi1_bus2bit.B_DQS	ALT 1	
GPIO_SD_B2_06	flexspi1_bus2bit.B_SS0_B	ALT 1	
GPIO_SD_B2_07	flexspi1_bus2bit.B_SCLK	ALT 1	
GPIO_SD_B2_08	flexspi1_bus2bit.B_DATA[0]	ALT 1	
GPIO_SD_B2_09	flexspi1_bus2bit.B_DATA[1]	ALT 1	
GPIO_SD_B2_10	flexspi1_bus2bit.B_DATA[2]	ALT 1	
GPIO_SD_B2_11	flexspi1_bus2bit.B_DATA[3]	ALT 1	
GPIO_B2_03	flexspi1_bus2bit.A_DATA[4]	ALT 7	Port A
GPIO_B2_04	flexspi1_bus2bit.A_DATA[5]	ALT 7	
GPIO_B2_05	flexspi1_bus2bit.A_DATA[6]	ALT 7	
GPIO_B2_06	flexspi1_bus2bit.A_DATA[7]	ALT 7	
GPIO_B2_07	flexspi1_bus2bit.A_DQS	ALT 7	
GPIO_B2_02	flexspi1_bus2bit.A_SCLK_B	ALT 6	

Table continues on the next page...

Table 102. Boot through FlexSPI1 (QSPI/HyperFLASH) ...continued

PAD Name	IO Function	ALT	Comments
GPIO_B2_08	flexspi1_bus2bit.A_SCLK	ALT 7	
GPIO_B2_01	flexspi1_bus2bit.A_SS1_B	ALT 6	
GPIO_B2_09	flexspi1_bus2bit.A_SS0_B	ALT 7	
GPIO_B2_10	flexspi1_bus2bit.A_DATA[0]	ALT 7	
GPIO_B2_11	flexspi1_bus2bit.A_DATA[1]	ALT 7	
GPIO_B2_12	flexspi1_bus2bit.A_DATA[2]	ALT 7	
GPIO_B2_13	flexspi1_bus2bit.A_DATA[3]	ALT 7	
GPIO_SD_B2_12_DUMMY	flexspi1_bus2bit.A_DQS	ALT 0	Secondary option
GPIO_SD_B2_12_DUMMY	flexspi1_bus2bit.B_DQS	ALT 1	Secondary option
GPIO_B1_04	flexspi1_bus2bit.B_SS0_B	ALT 7	Port B Group 1
GPIO_B1_02	flexspi1_bus2bit.B_SS1_B	ALT 7	
GPIO_B1_05	flexspi1_bus2bit.B_SCLK	ALT 7	
GPIO_B1_03	flexspi1_bus2bit.B_DQS	ALT 7	
GPIO_B1_10	flexspi1_bus2bit.B_DATA[3]	ALT 7	
GPIO_B1_11	flexspi1_bus2bit.B_DATA[2]	ALT 7	
GPIO_B1_12	flexspi1_bus2bit.B_DATA[1]	ALT 7	
GPIO_B1_13	flexspi1_bus2bit.B_DATA[0]	ALT 7	
GPIO_B1_09	flexspi1_bus2bit.B_DATA[4]	ALT 7	
GPIO_B1_08	flexspi1_bus2bit.B_DATA[5]	ALT 7	
GPIO_B1_07	flexspi1_bus2bit.B_DATA[6]	ALT 7	
GPIO_B1_06	flexspi1_bus2bit.B_DATA[7]	ALT 7	

Table 103. Boot through FlexSPI2

PAD Name	IO Function	ALT	Comments
GPIO_EMC_B1_35	flexspi2_bus2bit.A_DATA[0]	ALT 3	Port A Group 1
GPIO_EMC_B1_36	flexspi2_bus2bit.A_DATA[1]	ALT 3	

Table continues on the next page...

Table 103. Boot through FlexSPI2...continued

PAD Name	IO Function	ALT	Comments
GPIO_EMC_B1_37	flexspi2_bus2bit.A_DATA[2]	ALT 3	
GPIO_EMC_B1_38	flexspi2_bus2bit.A_DATA[3]	ALT 3	
GPIO_EMC_B1_39	flexspi2_bus2bit.A_SS0_B	ALT 3	
GPIO_EMC_B1_40	flexspi2_bus2bit.A_DQS	ALT 3	
GPIO_EMC_B1_41	flexspi2_bus2bit.A_SCLK	ALT 3	
GPIO_EMC_B1_26	flexspi2_bus2bit.A_SS1_B	ALT 3	
GPIO_AON_28_DUMMY	flexspi2_bus2bit.A_DQS	ALT 0	Secondary option
GPIO_AON_21	flexspi2_bus2bit.A_DQS	ALT 8	Port A Group 0
GPIO_AON_20	flexspi2_bus2bit.A_SS1_B	ALT 1	
GPIO_AON_22	flexspi2_bus2bit.A_SS0_B	ALT 0	
GPIO_AON_23	flexspi2_bus2bit.A_SCLK	ALT 0	
GPIO_AON_24	flexspi2_bus2bit.A_DATA[0]	ALT 0	
GPIO_AON_25	flexspi2_bus2bit.A_DATA[1]	ALT 0	
GPIO_AON_26	flexspi2_bus2bit.A_DATA[2]	ALT 0	
GPIO_AON_27	flexspi2_bus2bit.A_DATA[3]	ALT 0	
GPIO_AON_18	flexspi2_bus2bit.B_DATA[0]	ALT 0	Port B Group 0
GPIO_AON_17	flexspi2_bus2bit.B_DATA[1]	ALT 0	
GPIO_AON_16	flexspi2_bus2bit.B_DATA[2]	ALT 0	
GPIO_AON_15	flexspi2_bus2bit.B_DATA[3]	ALT 0	
GPIO_AON_21	flexspi2_bus2bit.B_SS0_B	ALT 0	
GPIO_AON_20	flexspi2_bus2bit.B_DQS	ALT 0	
GPIO_AON_19	flexspi2_bus2bit.B_SCLK	ALT 0	
GPIO_EMC_B1_33	flexspi2_bus2bit.B_DATA[0]	ALT 3	Port B Group 1
GPIO_EMC_B1_32	flexspi2_bus2bit.B_DATA[1]	ALT 3	
GPIO_EMC_B1_31	flexspi2_bus2bit.B_DATA[2]	ALT 3	

Table continues on the next page...

Table 103. Boot through FlexSPI2...continued

PAD Name	IO Function	ALT	Comments
GPIO_EMC_B1_30	flexspi2_bus2bit.B_DATA[3]	ALT 3	
GPIO_EMC_B1_28	flexspi2_bus2bit.B_SS0_B	ALT 3	
GPIO_EMC_B1_29	flexspi2_bus2bit.B_DQS	ALT 3	
GPIO_EMC_B1_34	flexspi2_bus2bit.B_SCLK	ALT 3	
GPIO_EMC_B1_27	flexspi2_bus2bit.B_SS1_B	ALT 3	
GPIO_AON_28_DUMMY	flexspi2_bus2bit.B_DQS	ALT 1	Secondary option

Table 104. Boot through FlexSPI reset

PAD Name	IO Function	ALT	Comments
GPIO_SD_B1_00	gpio5.IO[4]	ALT 5	—
GPIO_EMC_B1_40	gpio3.IO[8]	ALT 5	—

Table 105. Boot through SPI-1

PAD Name	IO Function	ALT	Comments
GPIO_AON_04	lpspi1.SCK	ALT 0	—
GPIO_AON_05	lpspi1.PCS0	ALT 0	—
GPIO_AON_06	lpspi1.SDO	ALT 0	Recovery boot: SIO0
GPIO_AON_07	lpspi1.SDI	ALT 0	Recovery boot: SIO1
GPIO_AON_09	lpspi1.PCS2	ALT 8	Recovery boot: SIO2
GPIO_AON_03	lpspi1.PCS3	ALT 4	Recovery boot: SIO3, Serial: nIRQ

Table 106. Boot through SPI-2

PAD Name	IO Function	ALT	Comments
GPIO_AON_22	lpspi2.SCK	ALT 6	—
GPIO_AON_25	lpspi2.PCS0	ALT 6	—
GPIO_AON_23	lpspi2.SDO	ALT 6	—
GPIO_AON_24	lpspi2.SDI	ALT 6	—

Table continues on the next page...

Table 106. Boot through SPI-2....continued

GPIO_AON_26	lpspi2.PCS2	ALT 1	—
GPIO_AON_27	lpspi2.PCS3	ALT 1	—

Table 107. Boot through SPI-4

PAD Name	IO Function	ALT	Comments
GPIO_SD_B2_08	lpspi4.SCK	ALT 4	—
GPIO_SD_B2_09	lpspi4.PCS0	ALT 4	—
GPIO_SD_B2_10	lpspi4.SDO	ALT 4	—
GPIO_SD_B2_11	lpspi4.SDI	ALT 4	—
GPIO_SD_B2_06	lpspi4.PCS2	ALT 4	—
GPIO_SD_B2_05	lpspi4.PCS3	ALT 4	—

Table 108. Boot through SPI-5

PAD Name	IO Function	ALT	Comments
GPIO_AD_28	lpspi5.SCK	ALT 0	—
GPIO_AD_29	lpspi5.PCS0	ALT 0	—
GPIO_AD_30	lpspi5.SDO	ALT 0	—
GPIO_AD_31	lpspi5.SDI	ALT 0	—
GPIO_AD_26	lpspi5.PCS2	ALT 2	—
GPIO_AD_25	lpspi5.PCS3	ALT 2	—

Table 109. Boot through SD1

PAD Name	IO Function	ALT	Comments
GPIO_AD_32	usdhc1.CD_B	ALT 4	—
GPIO_AD_33	usdhc1.WP	ALT 4	—
GPIO_AD_34	usdhc1.VSELECT	ALT 4	—
GPIO_AD_35	usdhc1.RESET_B	ALT 4	—
GPIO_SD_B1_00	usdhc1.CMD	ALT 0	—
GPIO_SD_B1_01	usdhc1.CLK	ALT 0	—

Table continues on the next page...

Table 109. Boot through SD1...continued

GPIO_SD_B1_02	usdhc1.DATA0	ALT 0	—
GPIO_SD_B1_03	usdhc1.DATA1	ALT 0	—
GPIO_SD_B1_04	usdhc1.DATA2	ALT 0	—
GPIO_SD_B1_05	usdhc1.DATA3	ALT 0	—

Table 110. Boot through SD2

PAD Name	IO Function	ALT	Comments
GPIO_AD_26	usdhc2.CD_B	ALT 9	—
GPIO_AD_27	usdhc2.WP	ALT 9	—
GPIO_AD_29	usdhc2.VSELECT	ALT 9	—
GPIO_SD_B2_00	usdhc2.DATA3	ALT 0	—
GPIO_SD_B2_01	usdhc2.DATA2	ALT 0	—
GPIO_SD_B2_02	usdhc2.DATA1	ALT 0	—
GPIO_SD_B2_03	usdhc2.DATA0	ALT 0	—
GPIO_SD_B2_04	usdhc2.CLK	ALT 0	—
GPIO_SD_B2_05	usdhc2.CMD	ALT 0	—
GPIO_SD_B2_06	usdhc2.RESET_B	ALT 0	—
GPIO_SD_B2_08	usdhc2.DATA4	ALT 0	—
GPIO_SD_B2_09	usdhc2.DATA5	ALT 0	—
GPIO_SD_B2_10	usdhc2.DATA6	ALT 0	—
GPIO_SD_B2_11	usdhc2.DATA7	ALT 0	—

Table 111. Boot through UART1

PAD Name	IO Function	ALT	Comments
GPIO_AON_08	lpuart1.TX	ALT 0	—
GPIO_AON_09	lpuart1.RX	ALT 0	—

Table 112. Boot failure indicators

PAD Name	IO Function	ALT	Comments
----------	-------------	-----	----------

Table continues on the next page...

Table 112. Boot failure indicators...continued

GPIO_AD_00	gpio4.IO[0]	ALT 5	—
GPIO_AD_01	gpio4.IO[1]	ALT 5	—
GPIO_AD_02	gpio4.IO[2]	ALT 5	—
GPIO_AD_03	gpio4.IO[3]	ALT 5	—
GPIO_AD_04	gpio4.IO[4]	ALT 5	—
GPIO_AD_05	gpio4.IO[5]	ALT 5	—
GPIO_AD_06	gpio4.IO[6]	ALT 5	—
GPIO_AD_07	gpio4.IO[7]	ALT 5	—
GPIO_AD_08	gpio4.IO[8]	ALT 5	—
GPIO_AD_09	gpio4.IO[9]	ALT 5	—
GPIO_AD_10	gpio4.IO[10]	ALT 5	—
GPIO_AD_11	gpio4.IO[11]	ALT 5	—
GPIO_B1_00	gpio6.IO[0]	ALT 5	—
GPIO_B1_01	gpio6.IO[1]	ALT 5	—
GPIO_B2_00	gpio6.IO[14]	ALT 5	—
GPIO_AD_33	gpio5.IO[1]	ALT 5	—

6 Package information and contact assignments

This section includes the contact assignment information and mechanical package drawing.


6.1 14 x 14 mm package information

6.1.1 14 x 14 mm, 0.8 mm pitch, ball matrix

Figure 63 shows the top, bottom, and side views of the 14 x 14 mm MAPBGA package.

MAPBGA-289 I/O
14 X 14 X 1.37 PKG, 0.8 PITCH

SOT1534-4

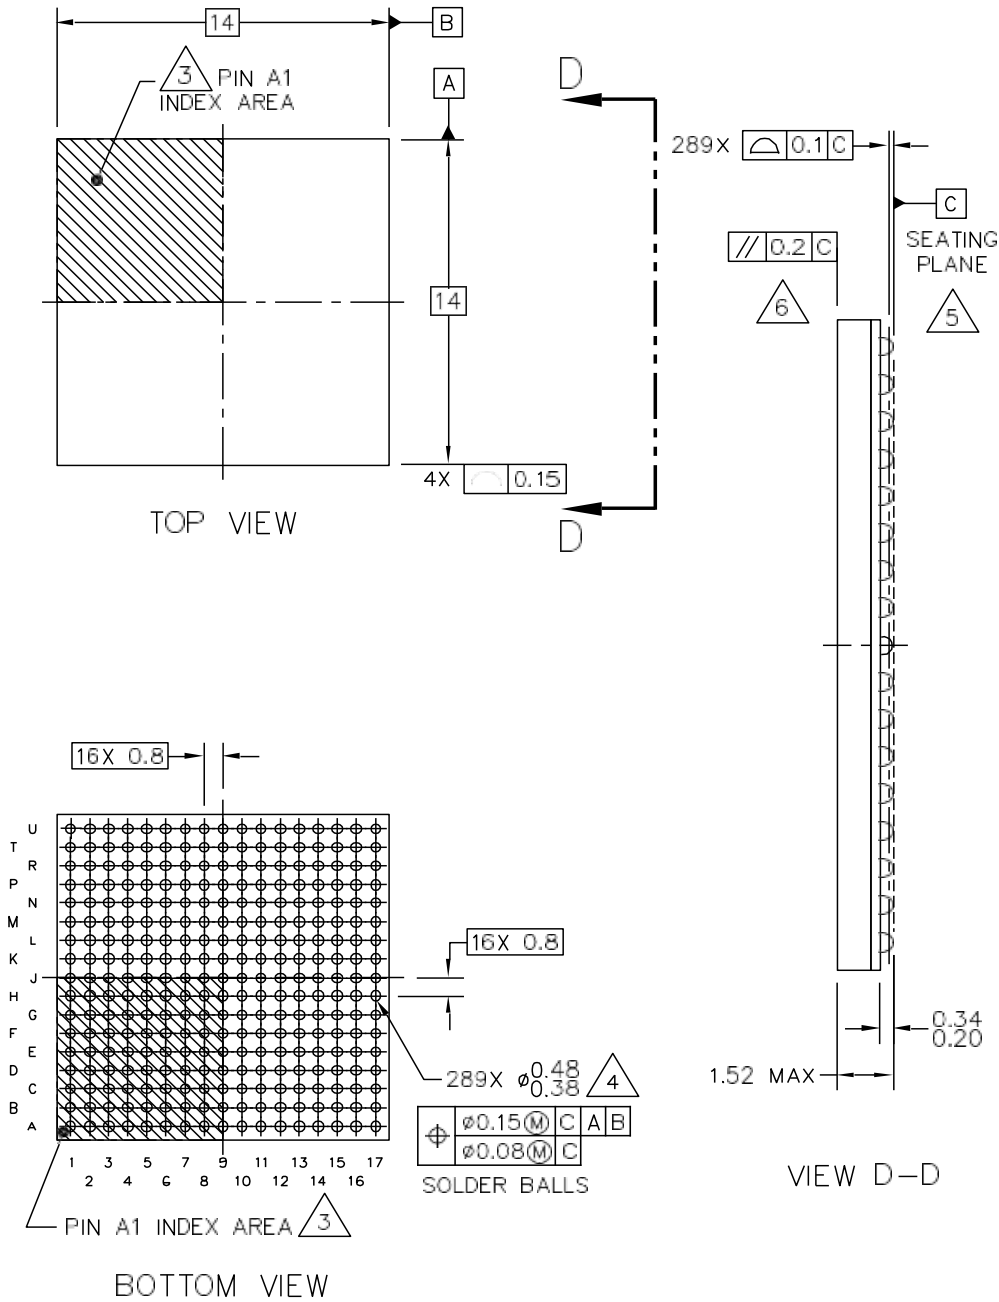

© NXP B.V. ALL RIGHTS RESERVED

DATE: 20 SEP 2019

MECHANICAL OUTLINE PRINT VERSION NOT TO SCALE	STANDARD: NON JEDEC	DRAWING NUMBER: 98ASA01216D	REVISION: A	PAGE: 1 OF 6
--	------------------------	--------------------------------	----------------	-----------------

Figure 63. 14 x 14 mm BGA, case x package top, bottom, and side Views

6.1.2 14 x 14 mm supplies contact assignments and functional contact assignments

Table 113 shows the device connection list for ground, sense, and reference contact signals.

Table 113. 14 x 14 mm supplies contact assignment

Supply Rail Name	Ball(s) Position(s)	Remark
ADC_VREFH	H16	—
DCDC_1P8	M4	—
DCDC_IN	M5, M6, M7, M8	—
DCDC_IN_Q	L7	—
DCDC_GND	K6, K7, K8, K9	—
DCDC_LP	T1, T2, T3, U2, U3	—
DCDC_MODE	L6	—
DCDC_PSWITCH	L5	—
DCDC_SENSE	L8	—
NVCC_AON	F7	—
NVCC_BBBSM	U11	—
NVCC_EMC1	J5, J6, K5	—
NVCC_EMC2	N6, N7	—
NVCC_GPIO1	D11, E11	—
NVCC_GPIO2	F9, F10	—
NVCC_GPIO_AD	L12, M11	—
NVCC_SD1	C13	—
NVCC_SD2	H12, H13	—
VDD_AON_ANA	P12	—
VDD_AON_DIG	P11	—
VDD_AON_IN	U14	—
VDD_BBBSM_ANA	R12	—
VDD_BBBSM_IN	U12	—
VDD_SOC	H8, H9, H10, J8, J9, J10, K10	—

Table continues on the next page...

Table 113. 14 x 14 mm supplies contact assignment ...continued

Supply Rail Name	Ball(s) Position(s)	Remark
VDD_USB_1P8	B17	—
VDD_USB_3P3	G12	—
VDDA_1P0	N11	—
VDDA_1P8_IN	M12	—
VDDA_ADC_1P8	J13	—
VDDA_ADC_3P3	J14	—
VSS	A1, A17, C11, C14, D4, D7, D8, D12, F11, F12, F13, G4, G7, G8, G9, G10, G11, G14, H7, H11, J7, J11, K11, L4, L10, L11, L14, P3, P4, P7, P14, T12, U1, U17	—

Table 114 shows an alpha-sorted list of functional contact assignments of the 14 x 14 mm package.

Table 114. 14 x 14 mm functional contact assignment

Ball name	14 x 14 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
CLK1_N	T15	—	—	—	—	—	—
CLK1_P	U15	—	—	—	—	—	—
DAC_OUT	J12	—	—	—	—	—	—
GPIO_AD_00	N12	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO00	Input	Pull Down
GPIO_AD_01	R14	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO01	Input	Pull Down
GPIO_AD_02	R13	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO02	Input	Pull Down
GPIO_AD_03	R15	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO03	Input	Pull Down
GPIO_AD_04	P15	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO04	Input	Pull Down
GPIO_AD_05	P13	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO05	Input	Pull Down

Table continues on the next page...

Table 114. 14 x 14 mm functional contact assignment ...continued

Ball name	14 x 14 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
GPIO_AD_06	N13	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO06	Input	Pull Down
GPIO_AD_07	T17	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO07	Input	Pull Down
GPIO_AD_08	T14	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO08	Input	Pull Down
GPIO_AD_09	R16	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO09	Input	Pull Down
GPIO_AD_10	R17	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO10	Input	Pull Down
GPIO_AD_11	P16	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO11	Input	Pull Down
GPIO_AD_12	P17	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO12	Input	Pull Up
GPIO_AD_13	N15	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO13	Input	Pull Down
GPIO_AD_14	N14	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO14	Input	Pull Down
GPIO_AD_15	N16	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO15	Input	Pull Down
GPIO_AD_16	N17	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO16	Input	Pull Down
GPIO_AD_17	M17	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO17	Input	Pull Down
GPIO_AD_18	K16	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO18	Input	Pull Down
GPIO_AD_19	L13	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO19	Input	Pull Down
GPIO_AD_20	K13	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO20	Input	Pull Down

Table continues on the next page...

Table 114. 14 x 14 mm functional contact assignment ...continued

Ball name	14 x 14 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
GPIO_AD_21	K15	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO21	Input	Pull Down
GPIO_AD_22	K12	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO22	Input	Pull Down
GPIO_AD_23	K14	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO23	Input	Pull Down
GPIO_AD_24	M13	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO24	Input	Pull Down
GPIO_AD_25	M15	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO25	Input	Pull Down
GPIO_AD_26	M14	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO26	Input	Pull Down
GPIO_AD_27	M16	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO27	Input	Pull Down
GPIO_AD_28	L16	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO28	Input	Pull Down
GPIO_AD_29	L15	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO29	Input	Pull Up
GPIO_AD_30	L17	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO30	Input	Pull Down
GPIO_AD_31	K17	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO31	Input	Pull Down
GPIO_AD_32	J17	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO5_IO00	Input	Pull Down
GPIO_AD_33	J16	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO5_IO01	Input	Pull Down
GPIO_AD_34	J15	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO5_IO02	Input	Pull Down
GPIO_AD_35	H17	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO5_IO03	Input	Pull Down

Table continues on the next page...

Table 114. 14 x 14 mm functional contact assignment ...continued

Ball name	14 x 14 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
GPIO_AON_00	F8	NVCC_AON	Digital FSGPIO	ALT 0	SRC_BOOT_MODE0	Input	Pull Down
GPIO_AON_01	B7	NVCC_AON	Digital FSGPIO	ALT 0	SRC_BOOT_MODE1	Input	Pull Down
GPIO_AON_02	B6	NVCC_AON	Digital FSGPIO	ALT 0	SRC_BOOT_MODE2	Input	Pull Down
GPIO_AON_03	C8	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO03	Input	Pull Down
GPIO_AON_04	B4	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO04	Input	Pull Down
GPIO_AON_05	C7	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO05	Input	Pull Down
GPIO_AON_06	E7	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO06	Input	Pull Down
GPIO_AON_07	C6	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO07	Input	Pull Down
GPIO_AON_08	B1	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO08	Input	Pull Down
GPIO_AON_09	A5	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO09	Input	Pull Down
GPIO_AON_10	B5	NVCC_AON	Digital FSGPIO	ALT 0	JTAG_MUX_TRSTB	Input	Pull Up
GPIO_AON_11	A4	NVCC_AON	Digital FSGPIO	ALT 0	JTAG_MUX_TDO	Input	High Z
GPIO_AON_12	A3	NVCC_AON	Digital FSGPIO	ALT 0	JTAG_MUX_TDI	Input	Pull Up
GPIO_AON_13	A2	NVCC_AON	Digital FSGPIO	ALT 0	JTAG_MUX_TCK	Input	Pull Down
GPIO_AON_14	B2	NVCC_AON	Digital FSGPIO	ALT 0	JTAG_MUX_TMS	Input	Pull Up

Table continues on the next page...

Table 114. 14 x 14 mm functional contact assignment ...continued

Ball name	14 x 14 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
GPIO_AON_15	B3	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO15	Input	Pull Down
GPIO_AON_16	C5	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO16	Input	Pull Down
GPIO_AON_17	D6	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO17	Input	Pull Down
GPIO_AON_18	E6	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO18	Input	Pull Down
GPIO_AON_19	D5	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO19	Input	Pull Up
GPIO_AON_20	E5	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO20	Input	Pull Up
GPIO_AON_21	F6	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO21	Input	Pull Up
GPIO_AON_22	C3	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO22	Input	Pull Up
GPIO_AON_23	C2	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO23	Input	Pull Down
GPIO_AON_24	C1	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO24	Input	Pull Down
GPIO_AON_25	D2	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO25	Input	Pull Down
GPIO_AON_26	C4	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO26	Input	Pull Down
GPIO_AON_27	D3	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO27	Input	Pull Up
GPIO_B1_00	E13	NVCC_GPIO1	Digital GPIO	ALT 5	GPIO6_IO00	Input	Pull Up
GPIO_B1_01	C12	NVCC_GPIO1	Digital GPIO	ALT 5	GPIO6_IO01	Input	Pull Up

Table continues on the next page...

Table 114. 14 x 14 mm functional contact assignment ...continued

Ball name	14 x 14 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
GPIO_B1_02	E12	NVCC_GPIO1	Digital GPIO	ALT 5	GPIO6_IO02	Input	Pull Up
GPIO_B1_03	A14	NVCC_GPIO1	Digital GPIO	ALT 5	GPIO6_IO03	Input	Pull Down
GPIO_B1_04	B13	NVCC_GPIO1	Digital GPIO	ALT 5	GPIO6_IO04	Input	Pull Up
GPIO_B1_05	B12	NVCC_GPIO1	Digital GPIO	ALT 5	GPIO6_IO05	Input	Pull Down
GPIO_B1_06	B10	NVCC_GPIO1	Digital GPIO	ALT 5	GPIO6_IO06	Input	Pull Down
GPIO_B1_07	D13	NVCC_GPIO1	Digital GPIO	ALT 5	GPIO6_IO07	Input	Pull Down
GPIO_B1_08	B14	NVCC_GPIO1	Digital GPIO	ALT 5	GPIO6_IO08	Input	Pull Down
GPIO_B1_09	A15	NVCC_GPIO1	Digital GPIO	ALT 5	GPIO6_IO09	Input	Pull Down
GPIO_B1_10	A13	NVCC_GPIO1	Digital GPIO	ALT 5	GPIO6_IO10	Input	Pull Down
GPIO_B1_11	A12	NVCC_GPIO1	Digital GPIO	ALT 5	GPIO6_IO11	Input	Pull Down
GPIO_B1_12	A11	NVCC_GPIO1	Digital GPIO	ALT 5	GPIO6_IO12	Input	Pull Down
GPIO_B1_13	B11	NVCC_GPIO1	Digital GPIO	ALT 5	GPIO6_IO13	Input	Pull Down
GPIO_B2_00	E9	NVCC_GPIO2	Digital GPIO	ALT 5	GPIO6_IO14	Input	Pull Up
GPIO_B2_01	E10	NVCC_GPIO2	Digital GPIO	ALT 5	GPIO6_IO15	Input	Pull Up
GPIO_B2_02	C10	NVCC_GPIO2	Digital GPIO	ALT 5	GPIO6_IO16	Input	Pull Up

Table continues on the next page...

Table 114. 14 x 14 mm functional contact assignment ...continued

Ball name	14 x 14 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
GPIO_B2_03	D9	NVCC_GPIO2	Digital GPIO	ALT 5	GPIO6_IO17	Input	Pull Down
GPIO_B2_04	C9	NVCC_GPIO2	Digital GPIO	ALT 5	GPIO6_IO18	Input	Pull Down
GPIO_B2_05	A9	NVCC_GPIO2	Digital GPIO	ALT 5	GPIO6_IO19	Input	Pull Down
GPIO_B2_06	E8	NVCC_GPIO2	Digital GPIO	ALT 5	GPIO6_IO20	Input	Pull Down
GPIO_B2_07	A6	NVCC_GPIO2	Digital GPIO	ALT 5	GPIO6_IO21	Input	Pull Down
GPIO_B2_08	A7	NVCC_GPIO2	Digital GPIO	ALT 5	GPIO6_IO22	Input	Pull Down
GPIO_B2_09	D10	NVCC_GPIO2	Digital GPIO	ALT 5	GPIO6_IO23	Input	Pull Up
GPIO_B2_10	A10	NVCC_GPIO2	Digital GPIO	ALT 5	GPIO6_IO24	Input	Pull Down
GPIO_B2_11	B9	NVCC_GPIO2	Digital GPIO	ALT 5	GPIO6_IO25	Input	Pull Down
GPIO_B2_12	A8	NVCC_GPIO2	Digital GPIO	ALT 5	GPIO6_IO26	Input	Pull Down
GPIO_B2_13	B8	NVCC_GPIO2	Digital GPIO	ALT 5	GPIO6_IO27	Input	Pull Down
GPIO_BBSM_00	R10	NVCC_BBSM	ANALOG GPIO (pad driver)	ALT 0	TAMPER0	Input	Pull Down
GPIO_BBSM_01	P10	NVCC_BBSM	ANALOG GPIO (pad driver)	ALT 0	TAMPER1	Input	Pull Down
GPIO_BBSM_02	L9	NVCC_BBSM	ANALOG GPIO	ALT 0	TAMPER2	Input	Pull Down

Table continues on the next page...

Table 114. 14 x 14 mm functional contact assignment ...continued

Ball name	14 x 14 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
			(pad driver)				
GPIO_BBSM_03	M10	NVCC_BBSM	ANALOG GPIO (pad driver)	ALT 0	TAMPER3	Input	Pull Down
GPIO_BBSM_04	N10	NVCC_BBSM	ANALOG GPIO (pad driver)	ALT 0	TAMPER4	Input	Pull Down
GPIO_BBSM_05	P9	NVCC_BBSM	ANALOG GPIO (pad driver)	ALT 0	TAMPER5	Input	Pull Down
GPIO_BBSM_06	M9	NVCC_BBSM	ANALOG GPIO (pad driver)	ALT 0	TAMPER6	Input	Pull Down
GPIO_BBSM_07	R9	NVCC_BBSM	ANALOG GPIO (pad driver)	ALT 0	TAMPER7	Input	Pull Down
GPIO_BBSM_08	N9	NVCC_BBSM	ANALOG GPIO (pad driver)	ALT 0	TAMPER8	Input	Pull Down
GPIO_BBSM_09	R11	NVCC_BBSM	ANALOG GPIO (pad driver)	ALT 0	TAMPER9	Input	Pull Down
GPIO_EMC_B1_00	H3	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO00	Input	Pull Down
GPIO_EMC_B1_01	H4	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO01	Input	Pull Down
GPIO_EMC_B1_02	K2	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO02	Input	Pull Down

Table continues on the next page...

Table 114. 14 x 14 mm functional contact assignment ...continued

Ball name	14 x 14 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
GPIO_EMC_B1_03	G3	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO03	Input	Pull Down
GPIO_EMC_B1_04	J4	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO04	Input	Pull Down
GPIO_EMC_B1_05	H6	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO05	Input	Pull Down
GPIO_EMC_B1_06	K3	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO06	Input	Pull Down
GPIO_EMC_B1_07	M3	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO07	Input	Pull Down
GPIO_EMC_B1_08	H5	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO08	Input	Pull Down
GPIO_EMC_B1_09	E1	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO09	Input	Pull Down
GPIO_EMC_B1_10	E3	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO10	Input	Pull Down
GPIO_EMC_B1_11	F2	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO11	Input	Pull Down
GPIO_EMC_B1_12	G6	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO12	Input	Pull Down
GPIO_EMC_B1_13	F3	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO13	Input	Pull Down
GPIO_EMC_B1_14	G5	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO14	Input	Pull Down
GPIO_EMC_B1_15	G2	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO15	Input	Pull Down
GPIO_EMC_B1_16	H1	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO16	Input	Pull Down
GPIO_EMC_B1_17	E2	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO17	Input	Pull Down

Table continues on the next page...

Table 114. 14 x 14 mm functional contact assignment ...continued

Ball name	14 x 14 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
GPIO_EMC_B1_18	D1	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO18	Input	Pull Down
GPIO_EMC_B1_19	F4	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO19	Input	Pull Down
GPIO_EMC_B1_20	G1	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO20	Input	Pull Down
GPIO_EMC_B1_21	K4	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO21	Input	Pull Down
GPIO_EMC_B1_22	L3	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO22	Input	Pull Down
GPIO_EMC_B1_23	F1	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO23	Input	Pull Down
GPIO_EMC_B1_24	P2	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO24	Input	Pull Down
GPIO_EMC_B1_25	N3	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO25	Input	Pull Down
GPIO_EMC_B1_26	N4	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO26	Input	Pull Up
GPIO_EMC_B1_27	J3	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO27	Input	Pull Down
GPIO_EMC_B1_28	F5	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO28	Input	Pull Up
GPIO_EMC_B1_29	E4	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO29	Input	Pull Down
GPIO_EMC_B1_30	H2	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO30	Input	Pull Down
GPIO_EMC_B1_31	J2	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO31	Input	Pull Down
GPIO_EMC_B1_32	J1	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO00	Input	Pull Down

Table continues on the next page...

Table 114. 14 x 14 mm functional contact assignment ...continued

Ball name	14 x 14 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
GPIO_EMC_B1_33	K1	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO01	Input	Pull Down
GPIO_EMC_B1_34	L2	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO02	Input	Pull Down
GPIO_EMC_B1_35	L1	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO03	Input	Pull Down
GPIO_EMC_B1_36	M1	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO04	Input	Pull Down
GPIO_EMC_B1_37	N1	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO05	Input	Pull Down
GPIO_EMC_B1_38	M2	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO06	Input	Pull Down
GPIO_EMC_B1_39	P1	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO07	Input	Pull Up
GPIO_EMC_B1_40	N2	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO08	Input	Pull Down
GPIO_EMC_B1_41	R1	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO09	Input	Pull Down
GPIO_EMC_B2_00	N5	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO10	Input	Pull Down
GPIO_EMC_B2_01	R2	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO11	Input	Pull Down
GPIO_EMC_B2_02	P5	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO12	Input	Pull Down
GPIO_EMC_B2_03	T5	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO13	Input	Pull Down
GPIO_EMC_B2_04	R3	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO14	Input	Pull Down
GPIO_EMC_B2_05	T4	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO15	Input	Pull Down

Table continues on the next page...

Table 114. 14 x 14 mm functional contact assignment ...continued

Ball name	14 x 14 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
GPIO_EMC_B2_06	T6	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO16	Input	Pull Down
GPIO_EMC_B2_07	T7	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO17	Input	Pull Down
GPIO_EMC_B2_08	U4	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO18	Input	Pull Down
GPIO_EMC_B2_09	U5	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO19	Input	Pull Down
GPIO_EMC_B2_10	U6	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO20	Input	Pull Down
GPIO_EMC_B2_11	P6	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO21	Input	Pull Down
GPIO_EMC_B2_12	R5	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO22	Input	Pull Down
GPIO_EMC_B2_13	R6	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO23	Input	Pull Down
GPIO_EMC_B2_14	N8	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO24	Input	Pull Down
GPIO_EMC_B2_15	R4	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO25	Input	Pull Down
GPIO_EMC_B2_16	R7	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO26	Input	Pull Down
GPIO_EMC_B2_17	U7	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO27	Input	Pull Down
GPIO_EMC_B2_18	P8	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO28	Input	Pull Up
GPIO_EMC_B2_19	U8	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO29	Input	Pull Down
GPIO_EMC_B2_20	R8	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO30	Input	Pull Down

Table continues on the next page...

Table 114. 14 x 14 mm functional contact assignment ...continued

Ball name	14 x 14 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
GPIO_SD_B1_00	B16	NVCC_SD1	Digital GPIO	ALT 5	GPIO5_IO04	Input	Pull Down
GPIO_SD_B1_01	D15	NVCC_SD1	Digital GPIO	ALT 5	GPIO5_IO05	Input	Pull Down
GPIO_SD_B1_02	D14	NVCC_SD1	Digital GPIO	ALT 5	GPIO5_IO06	Input	Pull Up
GPIO_SD_B1_03	C15	NVCC_SD1	Digital GPIO	ALT 5	GPIO5_IO07	Input	Pull Up
GPIO_SD_B1_04	B15	NVCC_SD1	Digital GPIO	ALT 5	GPIO5_IO08	Input	Pull Up
GPIO_SD_B1_05	A16	NVCC_SD1	Digital GPIO	ALT 5	GPIO5_IO09	Input	Pull Up
GPIO_SD_B2_00	H15	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO10	Input	Pull Down
GPIO_SD_B2_01	H14	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO11	Input	Pull Down
GPIO_SD_B2_02	G17	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO12	Input	Pull Down
GPIO_SD_B2_03	G13	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO13	Input	Pull Down
GPIO_SD_B2_04	G15	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO14	Input	Pull Up
GPIO_SD_B2_05	E15	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO15	Input	Pull Down
GPIO_SD_B2_06	F15	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO16	Input	Pull Up
GPIO_SD_B2_07	E14	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO17	Input	Pull Down
GPIO_SD_B2_08	F14	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO18	Input	Pull Down

Table continues on the next page...

Table 114. 14 x 14 mm functional contact assignment ...continued

Ball name	14 x 14 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
GPIO_SD_B2_09	F16	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO19	Input	Pull Down
GPIO_SD_B2_10	G16	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO20	Input	Pull Down
GPIO_SD_B2_11	F17	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO21	Input	Pull Down
ONOFF	U10	NVCC_BBSM	ANALOG GPIO (pad driver)	ALT 0	ONOFF	Input	Pull Up
PMIC_ON_REQ	U9	NVCC_BBSM	ANALOG GPIO (pad driver)	ALT 0	PMIC_ON_REQ	Output	No Pull
PMIC_STBY_REQ	T9	NVCC_BBSM	ANALOG GPIO (pad driver)	ALT 0	PMIC_STBY_REQ	Output	No Pull
POR_B	T10	NVCC_BBSM	ANALOG GPIO (pad driver)	ALT 0	POR_B	Input	Pull Up
RTC_XTALI	T13	—	—	—	—	—	—
RTC_XTALO	U13	—	—	—	—	—	—
TEST_MODE	T11	NVCC_BBSM	ANALOG GPIO (pad driver)	ALT 0	TEST_MODE	Input	Pull Down
USB1_DN	E16	—	—	—	—	—	—
USB1_DP	E17	—	—	—	—	—	—
USB1_VBUS	D17	—	—	—	—	—	—
USB2_DN	C16	—	—	—	—	—	—

Table continues on the next page...

Table 114. 14 x 14 mm functional contact assignment ...continued

Ball name	14 x 14 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
USB2_DP	C17	—	—	—	—	—	—
USB2_VBUS	D16	—	—	—	—	—	—
WAKEUP	T8	NVCC_BB5M	ANALOG GPIO (pad driver)	ALT 0	WAKEUP	Input	Pull Down
XTALI	U16	—	—	—	—	—	—
XTALO	T16	—	—	—	—	—	—

6.1.3 14 x 14 mm, 0.8 mm pitch, ball map

Table 115 shows the 14 x 14 mm, 0.8 mm pitch ball map for the i.MX RT1180.

Table 115. 14 x 14 mm, 0.8 mm pitch, ball map

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
A	VSS	GPIO_ AON_ 13	GPIO_ AON_ 12	GPIO_ AON_ 11	GPIO_ AON_ 09	GPIO_ B2_ 07	GPIO_ B2_ 08	GPIO_ B2_ 12	GPIO_ B2_ 05	GPIO_ B2_ 10	GPIO_ B1_ 12	GPIO_ B1_ 11	GPIO_ B1_ 10	GPIO_ B1_ 03	GPIO_ B1_ 09	GPIO_ SD_B1_ _05	VSS
B	GPIO_ AON_ 08	GPIO_ AON_ 14	GPIO_ AON_ 15	GPIO_ AON_ 04	GPIO_ AON_ 10	GPIO_ AON_ 02	GPIO_ AON_ 01	GPIO_ B2_ 13	GPIO_ B2_ 11	GPIO_ B1_ 06	GPIO_ B1_ 13	GPIO_ B1_ 05	GPIO_ B1_ 04	GPIO_ B1_ 08	GPIO_ SD_B1_ _04	GPIO_ SD_B1_ _00	VDD_U SB_ 1P8
C	GPIO_ AON_ 24	GPIO_ AON_ 23	GPIO_ AON_ 22	GPIO_ AON_ 26	GPIO_ AON_ 16	GPIO_ AON_ 07	GPIO_ AON_ 05	GPIO_ AON_ 03	GPIO_ B2_ 04	GPIO_ B2_ 02	VSS	GPIO_ B1_ 01	NVCC_ SD1	VSS	GPIO_ SD_B1_ _03	USB2_ DN	USB2_ DP
D	GPIO_ EMC_B 1_18	GPIO_ AON_ 25	GPIO_ AON_ 27	VSS	GPIO_ AON_ 19	GPIO_ AON_ 17	VSS	VSS	GPIO_ B2_ 03	GPIO_ B2_ 09	NVCC_ GPIO1	VSS	GPIO_ B1_ 07	GPIO_ SD_B1_ _02	GPIO_ SD_B1_ _01	USB2_ VBUS	USB1_ VBUS
E	GPIO_ EMC_B 1_09	GPIO_ EMC_B 1_17	GPIO_ EMC_B 1_10	GPIO_ EMC_B 1_29	GPIO_ AON_ 20	GPIO_ AON_ 18	GPIO_ AON_ 06	GPIO_ B2_ 06	GPIO_ B2_ 00	GPIO_ B2_ 01	NVCC_ GPIO1	GPIO_ B1_ 02	GPIO_ B1_ 00	GPIO_ SD_B2_ _07	GPIO_ SD_B2_ _05	USB1_ DN	USB1_ DP
F	GPIO_ EMC_B 1_23	GPIO_ EMC_B 1_11	GPIO_ EMC_B 1_13	GPIO_ EMC_ B1_19	GPIO_ EMC_B 1_28	GPIO_ AON_ 21	NVCC_ AON	GPIO_ AON_ 00	NVCC_ GPIO2	NVCC_ GPIO2	VSS	VSS	VSS	GPIO_ SD_B2_ _08	GPIO_ SD_B2_ _06	GPIO_ SD_B2_ _09	GPIO_ SD_B2_ _11
G	GPIO_ EMC_B 1_20	GPIO_ EMC_B 1_15	GPIO_ EMC_B 1_03	VSS	GPIO_ EMC_B 1_14	GPIO_ EMC_B 1_12	VSS	VSS	VSS	VSS	VSS	VDD_U SB_ 3P3	GPIO_ SD_B2_ _03	VSS	GPIO_ SD_B2_ _04	GPIO_ SD_B2_ _10	GPIO_ SD_B2_ _02
H	GPIO_ EMC_B 1_16	GPIO_ EMC_B 1_30	GPIO_ EMC_B 1_00	GPIO_ EMC_ B1_01	GPIO_ EMC_B 1_08	GPIO_ EMC_B 1_05	VSS	VDD_S OC	VDD_S OC	VDD_S OC	VSS	NVCC_ SD2	NVCC_ SD2	GPIO_ SD_B2_ _01	GPIO_ SD_B2_ _00	ADC_V REFH	GPIO_ AD_35

Table continues on the next page...

Table 115. 14 x 14 mm, 0.8 mm pitch, ball map ...continued

J	GPIO_EMC_B1_32	GPIO_EMC_B1_31	GPIO_EMC_B1_27	GPIO_EMC_B1_04	NVCC_EMC1	NVCC_EMC1	VSS	VDD_S OC	VDD_S OC	VDD_S OC	VSS	DAC_OUT	VDDA_ADC1_P8	VDDA_ADC3_P3	GPIO_AD_34	GPIO_AD_33	GPIO_AD_32
K	GPIO_EMC_B1_33	GPIO_EMC_B1_02	GPIO_EMC_B1_06	GPIO_EMC_B1_21	NVCC_EMC1	DCDC_GND	DCDC_GND	DCDC_GND	DCDC_GND	VDD_S OC	VSS	GPIO_AD_22	GPIO_AD_20	GPIO_AD_23	GPIO_AD_21	GPIO_AD_18	GPIO_AD_31
L	GPIO_EMC_B1_35	GPIO_EMC_B1_34	GPIO_EMC_B1_22	VSS	DCDC_PSWITCH	DCDC_MODE	DCDC_IN_Q	DCDC_SENSE	GPIO_BBBSM_02	VSS	VSS	NVCC_GPIO_AD	GPIO_AD_19	VSS	GPIO_AD_29	GPIO_AD_28	GPIO_AD_30
M	GPIO_EMC_B1_36	GPIO_EMC_B1_38	GPIO_EMC_B1_07	DCDC_1P8	DCDC_IN	DCDC_IN	DCDC_IN	DCDC_IN	GPIO_BBBSM_06	GPIO_BBBSM_03	NVCC_GPIO_AD	VDDA_1P8_IN	GPIO_AD_24	GPIO_AD_26	GPIO_AD_25	GPIO_AD_27	GPIO_AD_17
N	GPIO_EMC_B1_37	GPIO_EMC_B1_40	GPIO_EMC_B1_25	GPIO_EMC_B1_26	GPIO_EMC_B2_00	NVCC_EMC2	NVCC_EMC2	GPIO_EMC_B2_14	GPIO_BBBSM_08	GPIO_BBBSM_04	VDDA_1P0	GPIO_AD_00	GPIO_AD_06	GPIO_AD_14	GPIO_AD_13	GPIO_AD_15	GPIO_AD_16
P	GPIO_EMC_B1_39	GPIO_EMC_B1_24	VSS	VSS	GPIO_EMC_B2_02	GPIO_EMC_B2_11	VSS	GPIO_EMC_B2_18	GPIO_BBBSM_05	GPIO_BBBSM_01	VDDA_ON_DIG	VDDA_ON_ANA	GPIO_AD_05	VSS	GPIO_AD_04	GPIO_AD_11	GPIO_AD_12
R	GPIO_EMC_B1_41	GPIO_EMC_B2_01	GPIO_EMC_B2_04	GPIO_EMC_B2_15	GPIO_EMC_B2_12	GPIO_EMC_B2_13	GPIO_EMC_B2_16	GPIO_EMC_B2_20	GPIO_BBBSM_07	GPIO_BBBSM_00	GPIO_BBBSM_09	VDD_BBSM_ANA	GPIO_AD_02	GPIO_AD_01	GPIO_AD_03	GPIO_AD_09	GPIO_AD_10
T	DCDC_LP	DCDC_LP	DCDC_LP	GPIO_EMC_B2_05	GPIO_EMC_B2_03	GPIO_EMC_B2_06	GPIO_EMC_B2_07	WAKEUP	PMIC_STBY_REQ	POR_B	TEST_MODE	VSS	RTC_XTALI	GPIO_AD_08	CLK1_N	XTALO	GPIO_AD_07

Table continues on the next page...

Table 115. 14 x 14 mm, 0.8 mm pitch, ball map ...continued

U	VSS	DCDC_ LP	DCDC_ LP	GPIO_ EMC_ B2_08	GPIO_ EMC_B 2_09	GPIO_ EMC_B 2_10	GPIO_ EMC_B 2_17	GPIO_ EMC_B 2_19	PMIC_ ON_ REQ	ONOF F	NVCC_ BBSM	VDD_B BSM_I N	RTC_ XTALO	VDD_A ON_ IN	CLK1_ P	XTALI	VSS
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17


6.2 12 x 12 mm package information

6.2.1 12 x 12 mm, 0.8 mm pitch, ball matrix

[Figure 64](#) shows the top, bottom, and side views of the 12 x 12 mm MAPBGA package.

MAPBGA-196 I/O
12 X 12 X 1.37 PKG, 0.8 PITCH

98ASA01198D

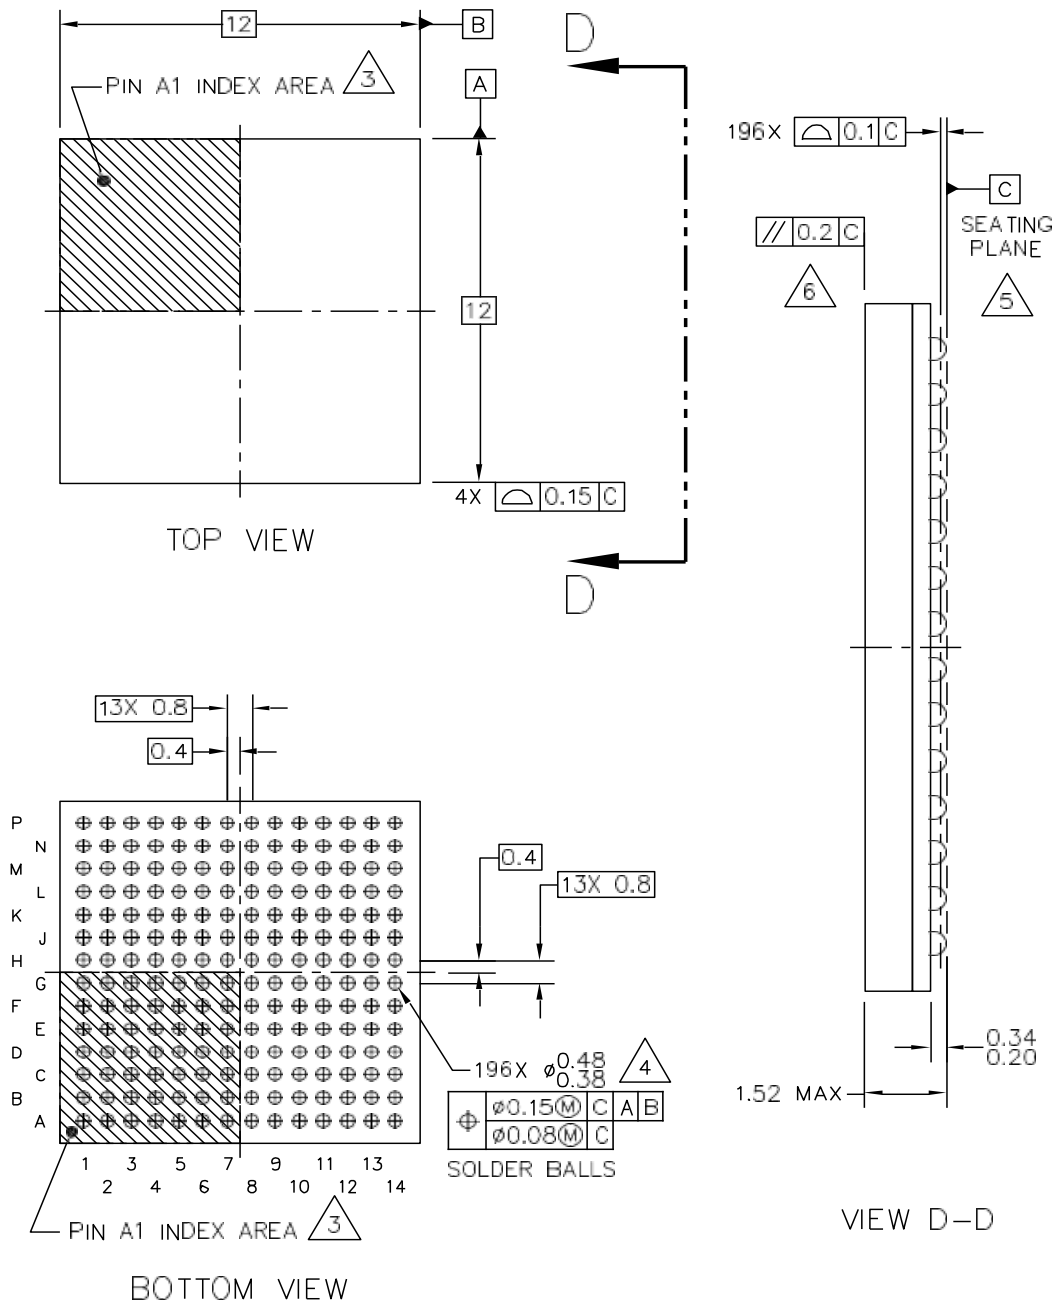

© NXP B.V. ALL RIGHTS RESERVED

DATE: 26 MAR 2018

MECHANICAL OUTLINE PRINT VERSION NOT TO SCALE	STANDARD: NON JEDEC	DRAWING NUMBER: SOT1968-1	REVISION: 0	PAGE: 1 OF 6
--	------------------------	------------------------------	----------------	-----------------

Figure 64. 12 x 12 mm BGA, case x package top, bottom, and side Views

6.2.2 12 x 12 mm supplies contact assignments and functional contact assignments

Table 116 shows the device connection list for ground, sense, and reference contact signals.

Table 116. 12 x 12 mm supplies contact assignment

Supply Rail Name	Ball(s) Position(s)	Remark
ADC_VREFH	G14	—
DCDC_1P8	P4	—
DCDC_IN	M1, M2, M3	—
DCDC_IN_Q	M4	—
DCDC_GND	M5, N5, P5	—
DCDC_LP	N1, N2, N3, P2, P3	—
DCDC_PSWITCH	M6	—
DCDC_SENSE	N4	—
NVCC_AON	D9	—
NVCC_BBBSM	M10	—
NVCC_EMC1	F6, G6	—
NVCC_EMC2	H6	—
NVCC_GPIO_AD	J10	—
NVCC_SD2	G10, H10	—
VDD_AON_ANA	K11	—
VDD_AON_DIG	L10	—
VDD_AON_IN	P11	—
VDD_BBBSM_ANA	L11	—
VDD_BBBSM_IN	P9	—
VDD_SOC	F9, G8, G9, H8, H9	—
VDDA_1P0	K9	—
VDDA_1P8_IN	K10	—
VDDA_ADC_1P8	H13	—
VDDA_ADC_3P3	H14	—

Table continues on the next page...

Table 116. 12 x 12 mm supplies contact assignment...continued

Supply Rail Name	Ball(s) Position(s)	Remark
VDD_USB_1P8	B14	
VDD_USB_3P3	H12	
VSS	A1, A14, D4, D12, F7, F8, G4, G7, G12, H7, K4, K8, K12, P1, P14	—

Table 117 shows an alpha-sorted list of functional contact assignments of the 12 x 12 mm package.

Table 117. 12 x 12 mm functional contact assignment

Ball name	12 x 12 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
CLK1_N	N12	—	—	—	—	—	—
CLK1_P	P12	—	—	—	—	—	—
DAC_OUT	J12	—	—	—	—	—	—
GPIO_AD_12	N14	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO12	Input	Pull Up
GPIO_AD_13	M13	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO13	Input	Pull Down
GPIO_AD_14	M12	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO14	Input	Pull Down
GPIO_AD_15	M14	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO15	Input	Pull Down
GPIO_AD_16	N11	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO16	Input	Pull Down
GPIO_AD_17	M11	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO17	Input	Pull Down
GPIO_AD_18	K13	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO18	Input	Pull Down
GPIO_AD_19	L12	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO19	Input	Pull Down
GPIO_AD_29	L13	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO29	Input	Pull Up
GPIO_AD_30	L14	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO30	Input	Pull Down

Table continues on the next page...

Table 117. 12 x 12 mm functional contact assignment...continued

Ball name	12 x 12 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
GPIO_AD_31	K14	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO31	Input	Pull Down
GPIO_AON_00	A10	NVCC_AON	Digital FSGPIO	ALT 0	SRC_BOOT_MODE0	Input	Pull Down
GPIO_AON_01	A8	NVCC_AON	Digital FSGPIO	ALT 0	SRC_BOOT_MODE1	Input	Pull Down
GPIO_AON_02	A7	NVCC_AON	Digital FSGPIO	ALT 0	SRC_BOOT_MODE2	Input	Pull Down
GPIO_AON_03	A9	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO03	Input	Pull Down
GPIO_AON_04	B5	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO04	Input	Pull Down
GPIO_AON_05	B8	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO05	Input	Pull Down
GPIO_AON_06	B9	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO06	Input	Pull Down
GPIO_AON_07	B7	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO07	Input	Pull Down
GPIO_AON_08	B1	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO08	Input	Pull Down
GPIO_AON_09	A6	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO09	Input	Pull Down
GPIO_AON_10	B6	NVCC_AON	Digital FSGPIO	ALT 0	JTAG_MUX_TRSTB	Input	Pull Up
GPIO_AON_11	A5	NVCC_AON	Digital FSGPIO	ALT 0	JTAG_MUX_TDO	Input	High Z
GPIO_AON_12	A4	NVCC_AON	Digital FSGPIO	ALT 0	JTAG_MUX_TDI	Input	Pull Up
GPIO_AON_13	A3	NVCC_AON	Digital FSGPIO	ALT 0	JTAG_MUX_TCK	Input	Pull Down

Table continues on the next page...

Table 117. 12 x 12 mm functional contact assignment...continued

Ball name	12 x 12 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
GPIO_AON_14	B3	NVCC_AON	Digital FSGPIO	ALT 0	JTAG_MUX_TMS	Input	Pull Up
GPIO_AON_15	B4	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO15	Input	Pull Down
GPIO_AON_16	C6	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO16	Input	Pull Down
GPIO_AON_17	C7	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO17	Input	Pull Down
GPIO_AON_18	B2	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO18	Input	Pull Down
GPIO_AON_19	A2	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO19	Input	Pull Up
GPIO_AON_20	C8	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO20	Input	Pull Up
GPIO_AON_21	C9	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO21	Input	Pull Up
GPIO_AON_22	C4	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO22	Input	Pull Up
GPIO_AON_23	B10	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO23	Input	Pull Down
GPIO_AON_24	E8	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO24	Input	Pull Down
GPIO_AON_25	D8	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO25	Input	Pull Down
GPIO_AON_26	C5	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO26	Input	Pull Down
GPIO_AON_27	E9	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO27	Input	Pull Up
GPIO_B2_00	A11	NVCC_GPIO2	Digital GPIO	ALT 5	GPIO6_IO14	Input	Pull Up

Table continues on the next page...

Table 117. 12 x 12 mm functional contact assignment...continued

Ball name	12 x 12 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
GPIO_B2_01	B11	NVCC_GPIO2	Digital GPIO	ALT 5	GPIO6_IO15	Input	Pull Up
GPIO_B2_02	C11	NVCC_GPIO2	Digital GPIO	ALT 5	GPIO6_IO16	Input	Pull Up
GPIO_B2_03	A12	NVCC_GPIO2	Digital GPIO	ALT 5	GPIO6_IO17	Input	Pull Down
GPIO_B2_04	B12	NVCC_GPIO2	Digital GPIO	ALT 5	GPIO6_IO18	Input	Pull Down
GPIO_B2_05	C12	NVCC_GPIO2	Digital GPIO	ALT 5	GPIO6_IO19	Input	Pull Down
GPIO_B2_06	D10	NVCC_GPIO2	Digital GPIO	ALT 5	GPIO6_IO20	Input	Pull Down
GPIO_B2_07	C10	NVCC_GPIO2	Digital GPIO	ALT 5	GPIO6_IO21	Input	Pull Down
GPIO_B2_08	A13	NVCC_GPIO2	Digital GPIO	ALT 5	GPIO6_IO22	Input	Pull Down
GPIO_B2_09	B13	NVCC_GPIO2	Digital GPIO	ALT 5	GPIO6_IO23	Input	Pull Up
GPIO_B2_10	C13	NVCC_GPIO2	Digital GPIO	ALT 5	GPIO6_IO24	Input	Pull Down
GPIO_B2_11	D11	NVCC_GPIO2	Digital GPIO	ALT 5	GPIO6_IO25	Input	Pull Down
GPIO_B2_12	E10	NVCC_GPIO2	Digital GPIO	ALT 5	GPIO6_IO26	Input	Pull Down
GPIO_B2_13	F10	NVCC_GPIO2	Digital GPIO	ALT 5	GPIO6_IO27	Input	Pull Down
GPIO_BB5M_00	N7	NVCC_BB5M	ANALOG GPIO (pad driver)	ALT 0	TAMPER0	Input	Pull Down
GPIO_BB5M_05	N6	NVCC_BB5M	ANALOG GPIO	ALT 0	TAMPER5	Input	Pull Down

Table continues on the next page...

Table 117. 12 x 12 mm functional contact assignment...continued

Ball name	12 x 12 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
			(pad driver)				
GPIO_EMC_B1_00	G3	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO00	Input	Pull Down
GPIO_EMC_B1_01	H4	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO01	Input	Pull Down
GPIO_EMC_B1_02	K2	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO02	Input	Pull Down
GPIO_EMC_B1_03	F3	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO03	Input	Pull Down
GPIO_EMC_B1_04	J4	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO04	Input	Pull Down
GPIO_EMC_B1_05	E7	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO05	Input	Pull Down
GPIO_EMC_B1_06	K3	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO06	Input	Pull Down
GPIO_EMC_B1_07	J3	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO07	Input	Pull Down
GPIO_EMC_B1_08	D6	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO08	Input	Pull Down
GPIO_EMC_B1_09	D1	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO09	Input	Pull Down
GPIO_EMC_B1_10	D3	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO10	Input	Pull Down
GPIO_EMC_B1_11	D2	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO11	Input	Pull Down
GPIO_EMC_B1_12	D7	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO12	Input	Pull Down
GPIO_EMC_B1_13	E3	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO13	Input	Pull Down

Table continues on the next page...

Table 117. 12 x 12 mm functional contact assignment...continued

Ball name	12 x 12 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
GPIO_EMC_B1_14	E5	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO14	Input	Pull Down
GPIO_EMC_B1_15	E2	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO15	Input	Pull Down
GPIO_EMC_B1_16	G1	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO16	Input	Pull Down
GPIO_EMC_B1_17	C2	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO17	Input	Pull Down
GPIO_EMC_B1_26	H1	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO26	Input	Pull Up
GPIO_EMC_B1_27	H3	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO27	Input	Pull Down
GPIO_EMC_B1_28	D5	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO28	Input	Pull Up
GPIO_EMC_B1_29	E4	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO29	Input	Pull Down
GPIO_EMC_B1_30	F2	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO30	Input	Pull Down
GPIO_EMC_B1_31	G2	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO31	Input	Pull Down
GPIO_EMC_B1_32	J1	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO00	Input	Pull Down
GPIO_EMC_B1_33	K1	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO01	Input	Pull Down
GPIO_EMC_B1_34	L2	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO02	Input	Pull Down
GPIO_EMC_B1_35	L1	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO03	Input	Pull Down
GPIO_EMC_B1_36	F5	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO04	Input	Pull Down

Table continues on the next page...

Table 117. 12 x 12 mm functional contact assignment...continued

Ball name	12 x 12 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
GPIO_EMC_B1_37	H2	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO05	Input	Pull Down
GPIO_EMC_B1_38	J2	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO06	Input	Pull Down
GPIO_EMC_B1_39	C3	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO07	Input	Pull Up
GPIO_EMC_B1_40	G5	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO08	Input	Pull Down
GPIO_EMC_B1_41	J5	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO09	Input	Pull Down
GPIO_EMC_B2_00	J7	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO10	Input	Pull Down
GPIO_EMC_B2_01	J9	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO11	Input	Pull Down
GPIO_EMC_B2_02	L9	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO12	Input	Pull Down
GPIO_EMC_B2_03	J6	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO13	Input	Pull Down
GPIO_EMC_B2_04	J8	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO14	Input	Pull Down
GPIO_EMC_B2_05	L8	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO15	Input	Pull Down
GPIO_EMC_B2_06	K5	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO16	Input	Pull Down
GPIO_EMC_B2_07	K7	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO17	Input	Pull Down
GPIO_EMC_B2_08	L7	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO18	Input	Pull Down
GPIO_EMC_B2_09	L5	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO19	Input	Pull Down

Table continues on the next page...

Table 117. 12 x 12 mm functional contact assignment...continued

Ball name	12 x 12 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
GPIO_EMC_B2_10	K6	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO20	Input	Pull Down
GPIO_EMC_B2_11	L6	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO21	Input	Pull Down
GPIO_EMC_B2_12	M7	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO22	Input	Pull Down
GPIO_EMC_B2_19	M9	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO29	Input	Pull Down
GPIO_EMC_B2_20	M8	NVCC_EMC2	Digital GPIO	ALT 5	GPIO3_IO30	Input	Pull Down
GPIO_SD_B1_02	J12	NVCC_SD1	Digital GPIO	ALT 5	GPIO5_IO06	Input	Pull Up
GPIO_SD_B1_03	J13	NVCC_SD1	Digital GPIO	ALT 5	GPIO5_IO07	Input	Pull Up
GPIO_SD_B2_00	G13	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO10	Input	Pull Down
GPIO_SD_B2_01	F14	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO11	Input	Pull Down
GPIO_SD_B2_02	F13	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO12	Input	Pull Down
GPIO_SD_B2_03	H11	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO13	Input	Pull Down
GPIO_SD_B2_04	F11	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO14	Input	Pull Up
GPIO_SD_B2_05	D13	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO15	Input	Pull Down
GPIO_SD_B2_06	E11	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO16	Input	Pull Up
GPIO_SD_B2_07	J11	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO17	Input	Pull Down

Table continues on the next page...

Table 117. 12 x 12 mm functional contact assignment...continued

Ball name	12 x 12 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
GPIO_SD_B2_08	G11	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO18	Input	Pull Down
GPIO_SD_B2_09	E12	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO19	Input	Pull Down
GPIO_SD_B2_10	F12	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO20	Input	Pull Down
GPIO_SD_B2_11	E13	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO21	Input	Pull Down
ONOFF	P8	NVCC_BBSM	ANALOG GPIO (pad driver)	ALT 0	ONOFF	Input	Pull Up
PMIC_ON_REQ	P7	NVCC_BBSM	ANALOG GPIO (pad driver)	ALT 0	PMIC_ON_REQ	Output	No Pull
POR_B	N9	NVCC_BBSM	ANALOG GPIO (pad driver)	ALT 0	POR_B	Input	Pull Up
RTC_XTALI	N10	—	—	—	—	—	—
RTC_XTALO	P10	—	—	—	—	—	—
TEST_MODE	N8	NVCC_BBSM	ANALOG GPIO (pad driver)	ALT 0	TEST_MODE	Input	Pull Down
USB1_DN	D14	—	—	—	—	—	—
USB1_DP	E14	—	—	—	—	—	—
USB1_VBUS	C14	—	—	—	—	—	—
WAKEUP	P6	NVCC_BBSM	ANALOG GPIO (pad driver)	ALT 0	WAKEUP	Input	Pull Down

Table continues on the next page...

Table 117. 12 x 12 mm functional contact assignment...continued

Ball name	12 x 12 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
XTALI	P13	—	—	—	—	—	—
XTALO	N13	—	—	—	—	—	—

6.2.3 12 x 12 mm, 0.8 mm pitch, ball map

Table 118 shows the 12 x 12 mm, 0.8 mm pitch ball map for the i.MX RT1180.

Table 118. 12 x 12 mm, 0.8 mm pitch, ball map

	1	2	3	4	5	6	7	8	9	10	11	12	13	14
A	VSS	GPIO_A ON_19	GPIO_A ON_13	GPIO_AO N_12	GPIO_A ON_11	GPIO_A ON_09	GPIO_A ON_02	GPIO_A ON_01	GPIO_A ON_03	GPIO_AO N_00	GPIO_B2 _00	GPIO_B2 _03	GPIO_B2 _08	VSS
B	GPIO_A ON_08	GPIO_A ON_18	GPIO_A ON_14	GPIO_AO N_15	GPIO_A ON_04	GPIO_A ON_10	GPIO_A ON_07	GPIO_A ON_05	GPIO_A ON_06	GPIO_AO N_23	GPIO_B2 _01	GPIO_B2 _04	GPIO_B2 _09	VDD_US B_1P8
C	GPIO_E MC_B1_1 8	GPIO_E MC_B1_1 7	GPIO_E MC_B1_3 9	GPIO_AO N_22	GPIO_A ON_26	GPIO_A ON_16	GPIO_A ON_17	GPIO_A ON_20	GPIO_A ON_21	GPIO_B2 _07	GPIO_B2 _02	GPIO_B2 _05	GPIO_B2 _10	USB1_V BUS
D	GPIO_E MC_B1_0 9	GPIO_E MC_B1_1 1	GPIO_E MC_B1_1 0	VSS	GPIO_E MC_B1_2 8	GPIO_E MC_B1_0 8	GPIO_E MC_B1_1 2	GPIO_A ON_25	NVCC_A ON	GPIO_B2 _06	GPIO_B2 _11	VSS	GPIO_SD _B2_05	USB1_D N
E	GPIO_E MC_B1_2 3	GPIO_E MC_B1_1 5	GPIO_E MC_B1_1 3	GPIO_EM C_B1_29	GPIO_E MC_B1_1 4	GPIO_E MC_B1_2 1	GPIO_E MC_B1_0 5	GPIO_A ON_24	GPIO_A ON_27	GPIO_B2 _12	GPIO_SD _B2_06	GPIO_SD _B2_09	GPIO_SD _B2_11	USB1_D P
F	GPIO_E MC_B1_2 0	GPIO_E MC_B1_3 0	GPIO_E MC_B1_0 3	GPIO_EM C_B1_19	GPIO_E MC_B1_3 6	NVCC_E MC1	VSS	VSS	VDD_SO C	GPIO_B2 _13	GPIO_SD _B2_04	GPIO_SD _B2_10	GPIO_SD _B2_02	GPIO_SD _B2_01
G	GPIO_E MC_B1_1 6	GPIO_E MC_B1_3 1	GPIO_E MC_B1_0 0	VSS	GPIO_E MC_B1_4 0	NVCC_E MC1	VSS	VDD_SO C	VDD_SO C	NVCC_S D2	GPIO_SD _B2_08	VSS	GPIO_SD _B2_00	ADC_VR EFH
H	GPIO_E MC_B1_2 6	GPIO_E MC_B1_3 7	GPIO_E MC_B1_2 7	GPIO_EM C_B1_01	GPIO_E MC_B1_2 4	NVCC_E MC2	VSS	VDD_SO C	VDD_SO C	NVCC_S D2	GPIO_SD _B2_03	VDD_US B_3P3	VDDA_A DC_1P8	VDDA_A DC_3P3
J	GPIO_E MC_B1_3 2	GPIO_E MC_B1_3 8	GPIO_E MC_B1_0 7	GPIO_EM C_B1_04	GPIO_E MC_B1_4 1	GPIO_E MC_B2_0 3	GPIO_E MC_B2_0 0	GPIO_E MC_B2_0 4	GPIO_E MC_B2_0 1	NVCC_G PIO_AD	GPIO_SD _B2_07	DAC_OU T	GPIO_SD _B1_02	GPIO_SD _B1_03

Table continues on the next page...

Table 118. 12 x 12 mm, 0.8 mm pitch, ball map ...continued

K	GPIO_E MC_B1_3 3	GPIO_E MC_B1_0 2	GPIO_E MC_B1_0 6	VSS	GPIO_E MC_B2_0 6	GPIO_E MC_B2_1 0	GPIO_E MC_B2_0 7	VSS	VDDA_1 P0	VDDA_1P 8_IN	VDD_AO N_ANA	VSS	GPIO_AD _18	GPIO_AD _31
L	GPIO_E MC_B1_3 5	GPIO_E MC_B1_3 4	GPIO_E MC_B1_2 2	GPIO_EM C_B1_25	GPIO_E MC_B2_0 9	GPIO_E MC_B2_1 1	GPIO_E MC_B2_0 8	GPIO_E MC_B2_0 5	GPIO_E MC_B2_0 2	VDD_AO N_DIG	VDD_BB SM_ANA	GPIO_AD _19	GPIO_AD _29	GPIO_AD _30
M	DCDC_IN	DCDC_IN	DCDC_IN	DCDC_IN _Q	DCDC_G ND	DCDC_P SWITCH	GPIO_E MC_B2_1 2	GPIO_E MC_B2_2 0	GPIO_E MC_B2_1 9	NVCC_BB SM	GPIO_AD _17	GPIO_AD _14	GPIO_AD _13	GPIO_AD _15
N	DCDC_L P	DCDC_L P	DCDC_L P	DCDC_S ENSE	DCDC_G ND	GPIO_BB SM_05	GPIO_BB SM_00	TEST_M ODE	POR_B	RTC_XTA LI	GPIO_AD _16	CLK1_N	XTALO	GPIO_AD _12
P	VSS	DCDC_L P	DCDC_L P	DCDC_1P 8	DCDC_G ND	WAKEUP	PMIC_O N_REQ	ONOFF	VDD_BB SM_IN	RTC_XTA LO	VDD_AO N_IN	CLK1_P	XTALI	VSS
	1	2	3	4	5	6	7	8	9	10	11	12	13	14


6.3 10 x 10 mm package information

6.3.1 10 x 10 mm, 0.8 mm pitch, ball matrix

[Figure 65](#) shows the top, bottom, and side views of the 10 x 10 mm MAPBGA package.

PBGA-144 I/O
10 X 10 X 1.37 PKG, 0.8 PITCH

SOT2134-1

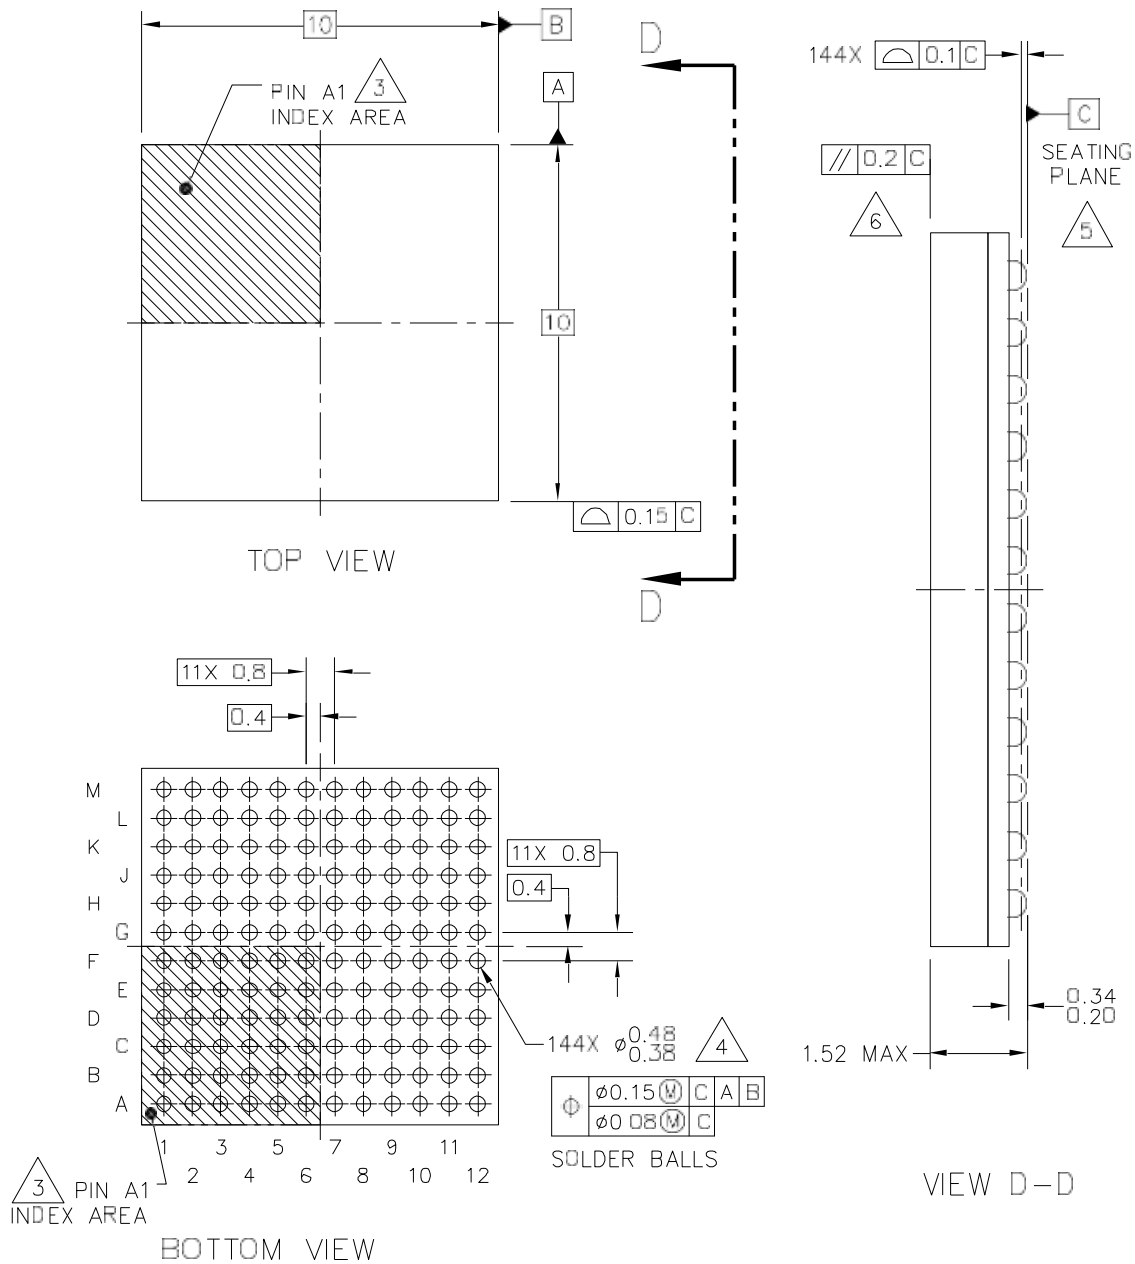

© NXP B.V. ALL RIGHTS RESERVED

DATE: 30 MAR 2021

MECHANICAL OUTLINE PRINT VERSION NOT TO SCALE	STANDARD: NON-JEDEC	DRAWING NUMBER: 98ASAD1754D	REVISION: 0	PAGE: 1 OF 6
--	------------------------	--------------------------------	----------------	-----------------

Figure 65. 10 x 10 mm BGA, case x package top, bottom, and side Views

6.3.2 10 x 10 mm supplies contact assignments and functional contact assignments

Table 119 shows the device connection list for ground, sense, and reference contact signals.

Table 119. 10 x 10 mm supplies contact assignment

Supply Rail Name	Ball(s) Position(s)	Remark
ADC_VREFH	F12	—
DCDC_1P8	L1	—
DCDC_IN	L4, M4	—
DCDC_IN_Q	K4	—
DCDC_GND	K3, L3, M3	—
DCDC_LP	L2, M2	—
DCDC_PSWITCH	K2	—
DCDC_SENSE	K1	—
NVCC_AON	D5	—
NVCC_BBBSM	K7	—
NVCC EMC1	F6, G6, H6	—
NVCC_GPIO_AD	H9	—
NVCC_SD2	E9, F9	—
VDD_AON_ANA	K9	—
VDD_AON_DIG	M8	—
VDD_AON_IN	L8	—
VDD_BBBSM_ANA	K8	—
VDD_BBBSM_IN	M6	—
VDD_SOC	E8, F7, F8, G7	—
VDDA_1P0	M10	—
VDDA_1P8_IN	J10	—
VDDA_ADC_1P8	G9	—
VDDA_ADC_3P3	G8	—
VSS	A1, A12, C8, D4, D9, J4, J9, L10, M1, M12	—

Table 120 shows an alpha-sorted list of functional contact assignments of the 10 x 10 mm package.

Table 120. 10 x 10 mm functional contact assignment

Ball name	10 x 10 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
MLB25		Float					
RGMII		Float					
SATA		Float					
		Ground					
CLK1_N	L11	—	—	—	—	—	—
CLK1_P	M11	—	—	—	—	—	—
DAC_OUT	G10	—	—	—	—	—	—
GPIO_AD_12	K11	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO12	Input	Pull Up
GPIO_AD_13	K10	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO13	Input	Pull Down
GPIO_AD_14	J11	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO14	Input	Pull Down
GPIO_AD_15	J12	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO15	Input	Pull Down
GPIO_AD_16	L12	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO16	Input	Pull Down
GPIO_AD_17	K12	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO17	Input	Pull Down
GPIO_AD_18	H10	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO18	Input	Pull Down
GPIO_AD_19	H11	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO19	Input	Pull Down
GPIO_AD_29	H12	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO29	Input	Pull Up
GPIO_AD_30	G11	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO30	Input	Pull Down
GPIO_AD_31	G12	NVCC_GPIO_AD	Digital FSGPIO	ALT 5	GPIO4_IO31	Input	Pull Down

Table continues on the next page...

Table 120. 10 x 10 mm functional contact assignment...continued

Ball name	10 x 10 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
GPIO_AON_00	C9	NVCC_AON	Digital FSGPIO	ALT 0	SRC_BOOT_MODE0	Input	Pull Down
GPIO_AON_01	C7	NVCC_AON	Digital FSGPIO	ALT 0	SRC_BOOT_MODE1	Input	Pull Down
GPIO_AON_02	C6	NVCC_AON	Digital FSGPIO	ALT 0	SRC_BOOT_MODE2	Input	Pull Down
GPIO_AON_03	B7	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO03	Input	Pull Down
GPIO_AON_04	D6	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO04	Input	Pull Down
GPIO_AON_05	B6	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO05	Input	Pull Down
GPIO_AON_06	D7	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO06	Input	Pull Down
GPIO_AON_07	D8	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO07	Input	Pull Down
GPIO_AON_08	A11	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO08	Input	Pull Down
GPIO_AON_09	B8	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO09	Input	Pull Down
GPIO_AON_10	A8	NVCC_AON	Digital FSGPIO	ALT 0	JTAG_MUX_TRSTB	Input	Pull Up
GPIO_AON_11	B9	NVCC_AON	Digital FSGPIO	ALT 0	JTAG_MUX_TDO	Input	High Z
GPIO_AON_12	A9	NVCC_AON	Digital FSGPIO	ALT 0	JTAG_MUX_TDI	Input	Pull Up
GPIO_AON_13	B11	NVCC_AON	Digital FSGPIO	ALT 0	JTAG_MUX_TCK	Input	Pull Down
GPIO_AON_14	B10	NVCC_AON	Digital FSGPIO	ALT 0	JTAG_MUX_TMS	Input	Pull Up

Table continues on the next page...

Table 120. 10 x 10 mm functional contact assignment...continued

Ball name	10 x 10 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
GPIO_AON_15	A10	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO15	Input	Pull Down
GPIO_AON_16	C5	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO16	Input	Pull Down
GPIO_AON_17	C4	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO17	Input	Pull Down
GPIO_AON_18	E7	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO18	Input	Pull Down
GPIO_AON_19	E6	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO19	Input	Pull Up
GPIO_AON_20	E5	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO20	Input	Pull Up
GPIO_AON_21	E4	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO21	Input	Pull Up
GPIO_AON_22	A7	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO22	Input	Pull Up
GPIO_AON_23	A6	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO23	Input	Pull Down
GPIO_AON_24	B5	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO24	Input	Pull Down
GPIO_AON_25	A5	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO25	Input	Pull Down
GPIO_AON_26	A4	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO26	Input	Pull Down
GPIO_AON_27	B4	NVCC_AON	Digital FSGPIO	ALT 5	GPIO1_IO27	Input	Pull Up
GPIO_BBBSM_00	J8	NVCC_BBBSM	ANALOG GPIO (pad driver)	ALT 0	TAMPER0	Input	Pull Down
GPIO_BBBSM_01	K6	NVCC_BBBSM	ANALOG GPIO	ALT 0	TAMPER1	Input	Pull Down

Table continues on the next page...

Table 120. 10 x 10 mm functional contact assignment...continued

Ball name	10 x 10 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
			(pad driver)				
GPIO_BBSM_05	H7	NVCC_BBSM	ANALOG GPIO (pad driver)	ALT 0	TAMPER5	Input	Pull Down
GPIO_BBSM_06	H8	NVCC_BBSM	ANALOG GPIO (pad driver)	ALT 0	TAMPER6	Input	Pull Down
GPIO_EMC_B1_00	G5	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO00	Input	Pull Down
GPIO_EMC_B1_01	G4	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO01	Input	Pull Down
GPIO_EMC_B1_02	H5	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO02	Input	Pull Down
GPIO_EMC_B1_03	F4	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO03	Input	Pull Down
GPIO_EMC_B1_04	H4	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO04	Input	Pull Down
GPIO_EMC_B1_05	F5	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO05	Input	Pull Down
GPIO_EMC_B1_06	J6	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO06	Input	Pull Down
GPIO_EMC_B1_07	J5	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO07	Input	Pull Down
GPIO_EMC_B1_08	F3	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO08	Input	Pull Down
GPIO_EMC_B1_09	A3	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO09	Input	Pull Down
GPIO_EMC_B1_10	C1	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO10	Input	Pull Down

Table continues on the next page...

Table 120. 10 x 10 mm functional contact assignment...continued

Ball name	10 x 10 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
GPIO_EMC_B1_11	B2	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO11	Input	Pull Down
GPIO_EMC_B1_12	D3	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO12	Input	Pull Down
GPIO_EMC_B1_13	E3	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO13	Input	Pull Down
GPIO_EMC_B1_14	D2	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO14	Input	Pull Down
GPIO_EMC_B1_15	B1	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO15	Input	Pull Down
GPIO_EMC_B1_16	A2	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO16	Input	Pull Down
GPIO_EMC_B1_17	B3	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO17	Input	Pull Down
GPIO_EMC_B1_26	J1	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO26	Input	Pull Up
GPIO_EMC_B1_27	G3	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO27	Input	Pull Down
GPIO_EMC_B1_28	C2	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO28	Input	Pull Up
GPIO_EMC_B1_29	C3	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO29	Input	Pull Down
GPIO_EMC_B1_30	D1	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO30	Input	Pull Down
GPIO_EMC_B1_31	E2	NVCC_EMC1	Digital GPIO	ALT 5	GPIO2_IO31	Input	Pull Down
GPIO_EMC_B1_32	E1	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO00	Input	Pull Down
GPIO_EMC_B1_33	F2	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO01	Input	Pull Down

Table continues on the next page...

Table 120. 10 x 10 mm functional contact assignment...continued

Ball name	10 x 10 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
GPIO_EMC_B1_34	F1	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO02	Input	Pull Down
GPIO_EMC_B1_35	G1	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO03	Input	Pull Down
GPIO_EMC_B1_36	G2	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO04	Input	Pull Down
GPIO_EMC_B1_37	H1	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO05	Input	Pull Down
GPIO_EMC_B1_38	H3	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO06	Input	Pull Down
GPIO_EMC_B1_39	H2	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO07	Input	Pull Up
GPIO_EMC_B1_40	J2	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO08	Input	Pull Down
GPIO_EMC_B1_41	J3	NVCC_EMC1	Digital GPIO	ALT 5	GPIO3_IO09	Input	Pull Down
GPIO_SD_B2_00	F10	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO10	Input	Pull Down
GPIO_SD_B2_01	E11	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO11	Input	Pull Down
GPIO_SD_B2_02	F11	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO12	Input	Pull Down
GPIO_SD_B2_03	E10	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO13	Input	Pull Down
GPIO_SD_B2_04	C12	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO14	Input	Pull Up
GPIO_SD_B2_05	D10	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO15	Input	Pull Down
GPIO_SD_B2_06	B12	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO16	Input	Pull Up

Table continues on the next page...

Table 120. 10 x 10 mm functional contact assignment...continued

Ball name	10 x 10 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
GPIO_SD_B2_07	C10	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO17	Input	Pull Down
GPIO_SD_B2_08	D11	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO18	Input	Pull Down
GPIO_SD_B2_09	D12	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO19	Input	Pull Down
GPIO_SD_B2_10	E12	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO20	Input	Pull Down
GPIO_SD_B2_11	C11	NVCC_SD2	Digital GPIO	ALT 5	GPIO5_IO21	Input	Pull Down
ONOFF	K5	NVCC_BBSM	ANALOG GPIO (pad driver)	ALT 0	ONOFF	Input	Pull Up
PMIC_ON_REQ	L5	NVCC_BBSM	ANALOG GPIO (pad driver)	ALT 0	PMIC_ON_REQ	Output	No Pull
POR_B	L6	NVCC_BBSM	ANALOG GPIO (pad driver)	ALT 0	POR_B	Input	Pull Up
RTC_XTALI	M7	—	—	—	—	—	—
RTC_XTALO	L7	—	—	—	—	—	—
TEST_MODE	J7	NVCC_BBSM	ANALOG GPIO (pad driver)	ALT 0	TEST_MODE	Input	Pull Down
USB1_DN	D14	—	—	—	—	—	—
USB1_DP	E14	—	—	—	—	—	—
USB1_VBUS	C14	—	—	—	—	—	—

Table continues on the next page...

Table 120. 10 x 10 mm functional contact assignment...continued

Ball name	10 x 10 ball	Power group	Ball Types	Default setting			
				Default modes	Default function	Input/output	Value
WAKEUP	M5	NVCC_BBSM	ANALOG GPIO (pad driver)	ALT 0	WAKEUP	Input	Pull Down
XTALI	M9	—	—	—	—	—	—
XTALO	L9	—	—	—	—	—	—

6.3.3 10 x 10 mm, 0.8 mm pitch, ball map

Table 121 shows the 10 x 10 mm, 0.8 mm pitch ball map for the i.MX RT1180 processors.

Table 121. 10 x 10 mm, 0.8 mm pitch, ball map

	1	2	3	4	5	6	7	8	9	10	11	12
A	VSS	GPIO_EMC_B1_16	GPIO_EMC_B1_09	GPIO_AON_26	GPIO_AON_25	GPIO_AON_23	GPIO_AON_22	GPIO_AON_10	GPIO_AON_12	GPIO_AON_15	GPIO_AON_08	VSS
B	GPIO_EMC_B1_15	GPIO_EMC_B1_11	GPIO_EMC_B1_17	GPIO_AON_27	GPIO_AON_24	GPIO_AON_05	GPIO_AON_03	GPIO_AON_09	GPIO_AON_11	GPIO_AON_14	GPIO_AON_13	GPIO_SD_B2_06
C	GPIO_EMC_B1_10	GPIO_EMC_B1_28	GPIO_EMC_B1_29	GPIO_AON_17	GPIO_AON_16	GPIO_AON_02	GPIO_AON_01	VSS	GPIO_AON_00	GPIO_SD_B2_07	GPIO_SD_B2_11	GPIO_SD_B2_04
D	GPIO_EMC_B1_30	GPIO_EMC_B1_14	GPIO_EMC_B1_12	VSS	NVCC_AON	GPIO_AON_04	GPIO_AON_06	GPIO_AON_07	VSS	GPIO_SD_B2_05	GPIO_SD_B2_08	GPIO_SD_B2_09
E	GPIO_EMC_B1_32	GPIO_EMC_B1_31	GPIO_EMC_B1_13	GPIO_AON_21	GPIO_AON_20	GPIO_AON_19	GPIO_AON_18	VDD_SOC	NVCC_SD_2	GPIO_SD_B2_03	GPIO_SD_B2_01	GPIO_SD_B2_10
F	GPIO_EMC_B1_34	GPIO_EMC_B1_33	GPIO_EMC_B1_08	GPIO_EMC_B1_03	GPIO_EMC_B1_05	NVCC_EMC1	VDD_SOC	VDD_SOC	NVCC_SD_2	GPIO_SD_B2_00	GPIO_SD_B2_02	ADC_VREFH
G	GPIO_EMC_B1_35	GPIO_EMC_B1_36	GPIO_EMC_B1_27	GPIO_EMC_B1_01	GPIO_EMC_B1_00	NVCC_EMC1	VDD_SOC	VDDA_ADC_3P3	VDDA_ADC_1P8	DAC_OUT	GPIO_AD30	GPIO_AD31
H	GPIO_EMC_B1_37	GPIO_EMC_B1_39	GPIO_EMC_B1_38	GPIO_EMC_B1_04	GPIO_EMC_B1_02	NVCC_EMC1	GPIO_BBSM_05	GPIO_BBSM_06	NVCC_GPIO_AD	GPIO_AD_18	GPIO_AD_19	GPIO_AD_29
J	GPIO_EMC_B1_26	GPIO_EMC_B1_40	GPIO_EMC_B1_41	VSS	GPIO_EMC_B1_07	GPIO_EMC_B1_06	TEST_MODE	GPIO_BBSM_00	VSS	VDDA_1P8_IN	GPIO_AD_14	GPIO_AD_15
K	DCDC_SENSE	DCDC_PSWITCH	DCDC_GND	DCDC_IN_Q	ONOFF	GPIO_BBSM_01	NVCC_BBSM	VDD_BBSM_ANA	VDD_AON_ANA	GPIO_AD_13	GPIO_AD_12	GPIO_AD_17

Table continues on the next page...

Table 121. 10 x 10 mm, 0.8 mm pitch, ball map...continued

L	DCDC_1P8	DCDC_LP	DCDC_ GND	DCDC_IN	PMIC_ON_ REQ	POR_B	RTC_ XTALO	VDD_AON_ _IN	XTALO	VSS	CLK1_N	GPIO_ AD_16
M	VSS	DCDC_LP	DCDC_ GND	DCDC_IN	WAKEUP	VDD_ BBSM_IN	RTC_ XTALI	VDD_AON_ _DIG	XTALI	VDDA_1P0	CLK1_P	VSS
	1	2	3	4	5	6	7	8	9	10	11	12

7 Revision history

Table 122 provides a revision history for this data sheet.

Table 122. i.MX RT1180 Data Sheet document revision history

Document ID	Release Date	Description
IMXRT1180EC v.6.0	July 01 2025	- Changed the CM33 core frequency to 300 MHz in i.MX RT1180 introduction - Updated the CM33 core frequency, SRAMC interface descriptions and TPM descriptions in Features - Updated the CM33 core frequency and external memory in Table 1 - Added the CM33 core frequency in Table 10 - Changed CM33 core frequency to 300 MHz in Figure 3 - Added second Over drive mode in Table 12 and Over drive mode in Table 13 - Added a footnote for 1.8 V output range and update the minimum value of 1.8 V output loading in Table 20 - Updated Table 33 - Updated Table 37 - Changed PSRAM to SRAM in the Comment column of Table 41 and Table 43 - Updated USB1_DP and USB1_VBUS pin name in Table 117
IMXRT1180EC v.5.0	April 28 025	- Updated Table 1 - Removed Section. Module list - Updated Figure 1 - Added GPIO_AD and GPIO_AON in Table 5 - Updated Table 9 - Updated values of NVCC_GPIO_AD and NVCC_AON in Table 10 - Updated the output voltage values of 1.8 V in Table 20 - Updated Table 33 - Updated Table 37 - Updated Table 58 - Changed f_{periph} to $f_{\text{pspi_root}}$ in Table 76 and Table 77; updated parameters of t_{WSCK} in Table 77 - Added 12 x 12 mm package information
IMXRT1180EC v.4.0	May 2024	- Updated part numbers information and added a footnote in Table 1 - Updated ADC and FlexSPI descriptions in Features

Table continues on the next page...

Table 122. i.MX RT1180 Data Sheet document revision history...continued

Document ID	Release Date	Description
		- Updated Figure 1 - Updated Figure 3 - Updated descriptions of DCDC_IN in Table 9 - Updated Table 10 - Updated Table 11 - Updated notes in Power supplies requirements and restrictions - Added table notes in PLL's electrical characteristics and clock output range in Arm PLL - Updated Table 26 - Updated Table 32 - Updated Table 34 - Updated Figure 21 and note descriptions - Added a footnote in Table 54 - Added FlexSPI Follower parameters - Updating timing parameters in LPSPI timing parameters - Updated the title of Ultra High Speed SD/SDIO/MMC Host Interface (uSDHC) AC timing; added RMII mode timing; and removed RGMII signal switching specifications - Added LPTMR characteristics
IMXRT1180EC v.3.0	November 2023	Updated Table 1
IMXRT1180EC v.2.1.0	September 2023	- Updated Figure 1 - Added Table 34
IMXRT1180EC v.2.0	February 2023	- Updated Table 37 - Added ADC temp sensor constant in Table 69 - Removed tT1588OV from Table 88
IMXRT1180EC v.1.0	September 2022	Initial version

Legal information

Data sheet status

Document status ^{[1][2]}	Product status ^[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <https://www.nxp.com>.

Definitions

Draft — A draft status on a document indicates that the content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included in a draft version of a document and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of NXP Semiconductors.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <https://www.nxp.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Suitability for use in non-automotive qualified products — Unless this document expressly states that this specific NXP Semiconductors product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NXP Semiconductors accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NXP Semiconductors' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond NXP Semiconductors' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NXP Semiconductors for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NXP Semiconductors' standard warranty and NXP Semiconductors' product specifications.

HTML publications — An HTML version, if available, of this document is provided as a courtesy. Definitive information is contained in the applicable document in PDF format. If there is a discrepancy between the HTML document and the PDF document, the PDF document has priority.

Translations — A non-English (translated) version of a document, including the legal information in that document, is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

Security — Customer understands that all NXP products may be subject to unidentified vulnerabilities or may support established security standards or specifications with known limitations. Customer is responsible for the design and operation of its applications and products throughout their lifecycles to reduce the effect of these vulnerabilities on customer's applications and products. Customer's responsibility also extends to other open and/or proprietary technologies supported by NXP products for use in customer's applications. NXP accepts no liability for any vulnerability. Customer should regularly check security updates from NXP and follow up appropriately.

Customer shall select products with security features that best meet rules, regulations, and standards of the intended application and make the ultimate design decisions regarding its products and is solely responsible for compliance with all legal, regulatory, and security related requirements concerning its products, regardless of any information or support that may be provided by NXP.

NXP has a Product Security Incident Response Team (PSIRT) (reachable at PSIRT@nxp.com) that manages the investigation, reporting, and solution release to security vulnerabilities of NXP products.

NXP B.V. — NXP B.V. is not an operating company and it does not distribute or sell products.

Trademarks

Notice: All referenced brands, product names, service names, and trademarks are the property of their respective owners.

NXP — wordmark and logo are trademarks of NXP B.V.

Contents

1	i.MX RT1180 introduction.....	2	4.7.3	12-bit DAC electrical characteristics.....	70
1.1	Features.....	2	4.7.4	ACMP electrical specifications.....	72
1.2	Ordering information.....	5	4.7.5	SINC filter specifications.....	73
1.3	Package marking information.....	9	4.7.6	Temperature sensor specifications.....	74
2	Architectural overview.....	10	4.8	Communication interfaces.....	74
2.1	Block diagram.....	10	4.8.1	LPSPi timing parameters.....	74
3	Special signal considerations.....	11	4.8.2	LPI2C module timing parameters.....	77
3.1	Recommended connections for unused analog interfaces.....	13	4.8.3	Improved Inter-Integrated Circuit Interface (I3C) specifications.....	78
4	Electrical characteristics.....	14	4.8.4	Ultra High Speed SD/SDIO/MMC Host Interface (uSDHC) AC timing.....	80
4.1	Chip-level conditions.....	14	4.8.5	Network AC electrical specifications.....	85
4.1.1	Absolute maximum ratings.....	14	4.8.6	Controller Area Network (CAN) AC electrical specifications.....	94
4.1.2	Thermal characteristics.....	16	4.8.7	LPUART electrical specifications.....	94
4.1.3	Power architecture.....	18	4.8.8	GPIO electrical specifications.....	95
4.1.4	Operating ranges.....	18	4.8.9	Flexible I/O controller (FlexIO) electrical specifications.....	95
4.1.5	Maximum supply currents.....	21	4.8.10	USB PHY parameters.....	95
4.1.6	Typical power mode supply currents.....	22	4.8.11	Timers.....	96
4.2	System power and clocks.....	29	4.8.12	BBSM.....	97
4.2.1	Power supplies requirements and restrictions.....	29	5	Boot mode configuration.....	98
4.2.2	Internal POR and power detect.....	30	5.1	Boot mode configuration pins.....	98
4.2.3	Integrated LDO voltage regulator parameters.....	31	5.2	Boot device interface allocation.....	99
4.2.4	DCDC.....	32	6	Package information and contact assignments	106
4.2.5	PLL's electrical characteristics.....	34	6.1	14 x 14 mm package information.....	106
4.2.6	On-chip oscillators.....	35	6.1.1	14 x 14 mm, 0.8 mm pitch, ball matrix.....	106
4.3	I/O parameters.....	38	6.1.2	14 x 14 mm supplies contact assignments and functional contact assignments.....	108
4.3.1	I/O DC parameters.....	38	6.1.3	14 x 14 mm, 0.8 mm pitch, ball map.....	123
4.3.2	I/O AC parameters.....	42	6.2	12 x 12 mm package information.....	127
4.4	System modules.....	45	6.2.1	12 x 12 mm, 0.8 mm pitch, ball matrix.....	127
4.4.1	Reset timings parameters.....	45	6.2.2	12 x 12 mm supplies contact assignments and functional contact assignments.....	129
4.4.2	JTAG Controller timing parameters.....	45	6.2.3	12 x 12 mm, 0.8 mm pitch, ball map.....	139
4.4.3	SWD timing parameters.....	47	6.3	10 x 10 mm package information.....	142
4.5	External memory interface.....	48	6.3.1	10 x 10 mm, 0.8 mm pitch, ball matrix.....	142
4.5.1	SEMC specifications.....	48	6.3.2	10 x 10 mm supplies contact assignments and functional contact assignments.....	144
4.5.2	SRAMC parameters.....	51	6.3.3	10 x 10 mm, 0.8 mm pitch, ball map.....	152
4.5.3	FlexSPI parameters.....	53	7	Revision history.....	155
4.5.4	FlexSPI Follower parameters.....	59		Legal information.....	157
4.6	Audio.....	61			
4.6.1	PDM Microphone interface timing parameters.....	61			
4.6.2	SAI/I2S switching specifications.....	62			
4.6.3	SPDIF timing parameters.....	64			
4.7	Analog.....	65			
4.7.1	16-bit ADC electrical specifications.....	65			
4.7.2	Voltage Reference (VREF).....	69			

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© 2025 NXP B.V.

All rights reserved.

For more information, please visit: <https://www.nxp.com>

Date of release: 1 July 2025
Document identifier: IMXRT1180EC