

[Manuals.plus](#) /

› [Bestway](#) /

› Bestway Steel Pro Max Above Ground Pool Kit (3.66 x 1.00 m) Instruction Manual

Bestway 1056418XXX26

Bestway Steel Pro Max Above Ground Pool Kit (3.66 x 1.00 m) Instruction Manual

Model: 1056418XXX26

INTRODUCTION

This instruction manual provides essential information for the safe assembly, operation, and maintenance of your Bestway Steel Pro Max Above Ground Pool Kit. Please read this manual thoroughly before installation and keep it for future reference. Proper installation and maintenance are crucial for the longevity and safe use of your pool.

SAFETY INFORMATION

Always prioritize safety when using your pool. Failure to follow these instructions can result in serious injury or death.

- **Adult Supervision Required:** Never leave children unattended in or around the pool.
- **No Diving or Jumping:** The pool is not deep enough for diving or jumping.
- **Secure Ladder:** Ensure the ladder is stable and properly installed before use. Remove or secure the ladder when the pool is not in use to prevent unsupervised access.
- **Electrical Safety:** Keep all electrical devices, including the filter pump, away from water. Use ground fault circuit interrupters (GFCI) for all electrical connections.
- **Chemical Handling:** Follow all instructions for pool chemicals. Store chemicals safely out of reach of children.
- **Emergency Preparedness:** Keep emergency equipment (e.g., life ring, first aid kit) readily accessible.

SETUP AND ASSEMBLY

Careful site selection and preparation are essential for the stability and safety of your Bestway Steel Pro Max pool.

1. Site Preparation

- Choose a firm, level surface free of debris, rocks, or sharp objects.
- Ensure the area is large enough for the pool (3.66m diameter) plus additional space for safe access.

- Avoid placing the pool under overhead power lines or near trees that shed leaves or debris.
- Ensure adequate drainage away from the pool area.

2. Unpacking Components

Carefully unpack all components and verify against the parts list. The kit includes:

- Pool Liner (DuraPlus™ material)
- Steel Frame Components (FrameLink System™)
- Filter Pump (compatible with Type II cartridge)
- Safety Ladder
- Hoses and Clamps for Filter Pump

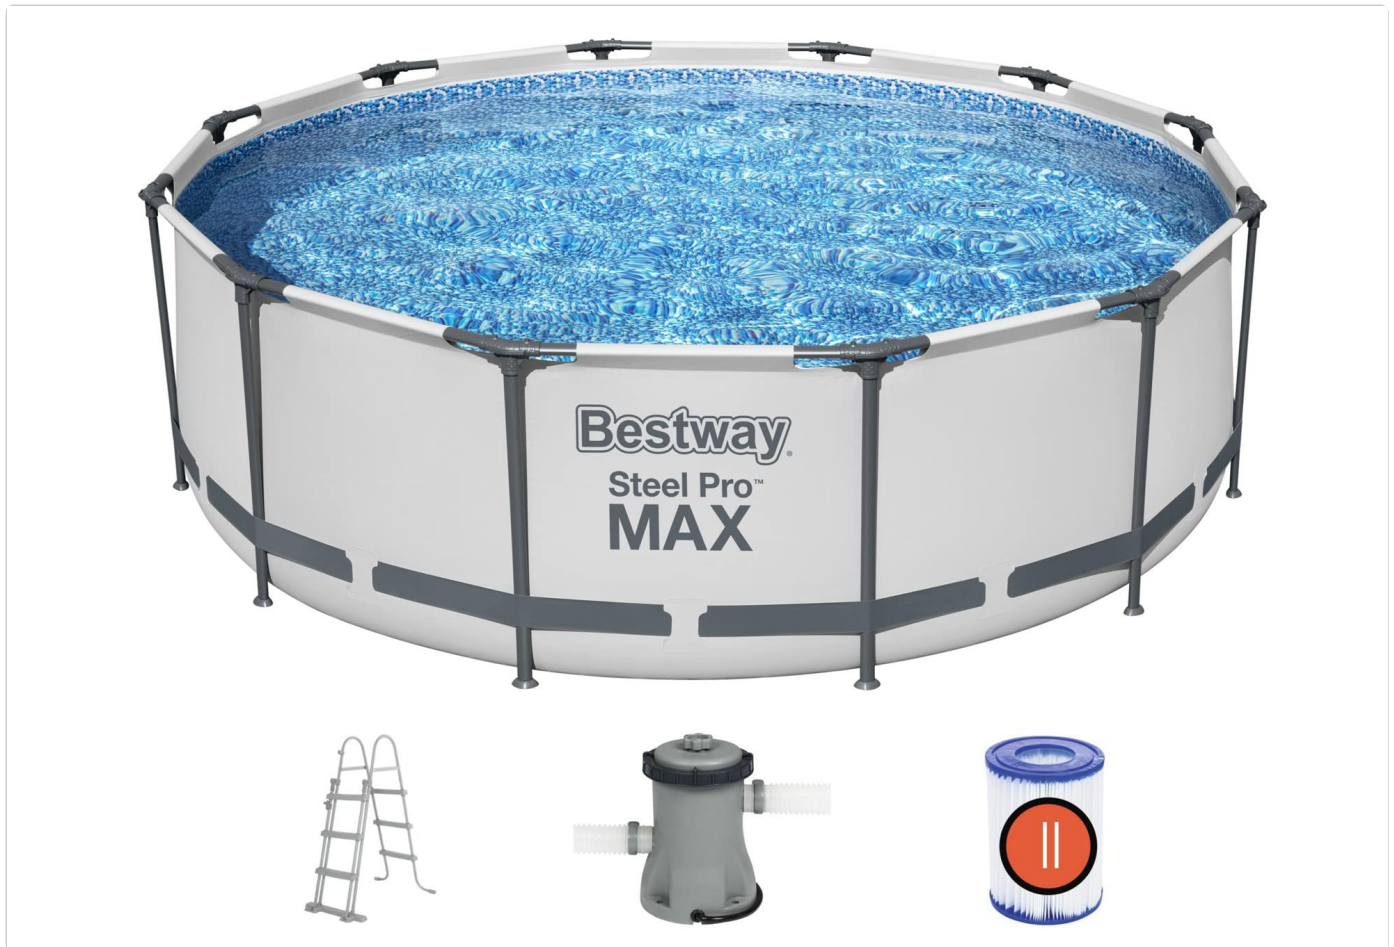


Figure 1: Overview of the Bestway Steel Pro Max Pool Kit components as shown on packaging.

3. Pool Assembly

Follow the step-by-step instructions provided with your pool for frame assembly. The FrameLink System™ is designed for easy and secure connection of the steel frame components.

1. Spread the pool liner on the prepared, level ground.
2. Assemble the horizontal beams and vertical legs according to the diagrams. Ensure all FrameLink System™ connectors are securely locked.
3. Attach the pool liner to the frame as instructed.

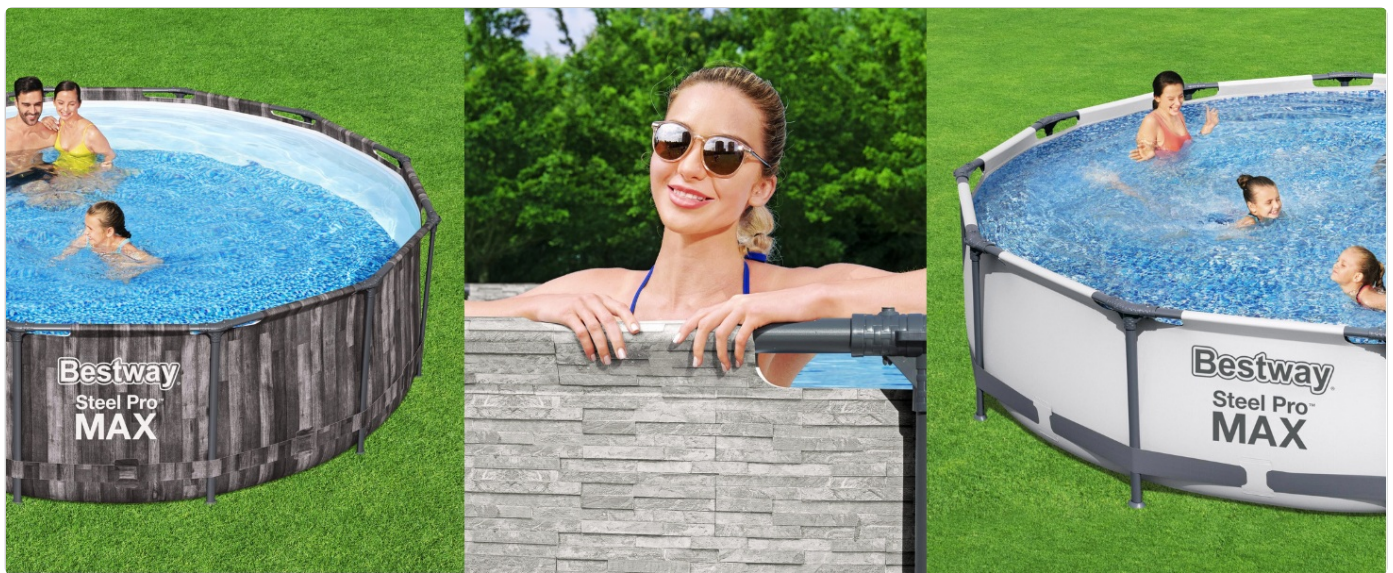


Figure 2: Visual representation of the pool assembly process and finished product.

STRUCTURE

Le cadre de la piscine en acier garantit une parfaite stabilité et résistance.

Traité contre la corrosion il vous permettra de profiter durablement de votre piscine Steel Pro Max.

The image features a large blue background with the word "STRUCTURE" in large, white, outlined letters. Below the text, there is a photograph of a Bestway Steel Pro MAX pool. To the right of the pool, there is a close-up inset showing the steel frame structure of the pool, highlighting the corrosion-resistant steel frame.

Figure 3: Detail of the corrosion-resistant steel frame structure.

4. Filter Pump Installation

Connect the filter pump to the pool according to the pump's specific instructions. Ensure all hoses are securely fastened with clamps to prevent leaks.



Figure 4: The included filter pump.



Figure 5: Diagram illustrating the filter pump's operation, showing water intake, filtration, and output.

5. Ladder Assembly

Assemble the safety ladder as per its dedicated instructions. Place it on a stable surface next to the pool.



Figure 6: The included safety ladder.

OPERATING YOUR POOL

1. Filling the Pool

- Begin filling the pool with water. As the water level rises, smooth out any wrinkles in the bottom of the liner.
- Fill the pool to the recommended level, typically just below the top ring or skimmer opening. The pool has a capacity of approximately 9,150 liters.

2. Filter Pump Operation

- Once the pool is filled, prime the filter pump according to its manual.
- Operate the filter pump daily to ensure proper water circulation and filtration. The pump is designed to filter the entire volume of water in less than 8 hours.
- Do not operate the pump when people are in the pool.

3. Water Treatment

Maintain proper water chemistry to keep your pool clean and safe.

- Regularly test the water pH and chlorine levels using a pool test kit.
- Adjust chemical levels as needed, following the instructions on your pool chemical products.
- Shock treat the pool periodically to eliminate contaminants.

MAINTENANCE

1. Filter Cartridge Cleaning and Replacement

The filter cartridge (Type II) should be cleaned regularly and replaced every 2-4 weeks, depending on usage.

- Turn off and unplug the filter pump before performing any maintenance.
- Remove the filter housing cover and take out the cartridge.
- Rinse the cartridge thoroughly with a garden hose. If it remains dirty or discolored, replace it.
- Reinstall the clean or new cartridge and secure the housing cover.



Figure 7: A Type II filter cartridge, essential for pump filtration.

2. Pool Cleaning

- Skim debris from the water surface daily using a pool skimmer net.
- Vacuum the pool bottom as needed to remove settled dirt and debris.
- Wipe down the pool liner walls periodically to prevent algae buildup.

3. Winterization and Storage

Before storing the pool for the off-season:

- Drain the pool completely.
- Clean and dry all pool components thoroughly to prevent mold and mildew.
- Disassemble the frame and liner. Store them in a dry, protected area, away from extreme temperatures and pests.
- Store the filter pump and ladder indoors in a dry place.

TROUBLESHOOTING

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
Filter pump not working	Power supply issue, clogged filter, airlock, damaged pump.	Check power connection and GFCI. Clean or replace filter cartridge. Bleed air from the pump. Inspect for damage and contact support if necessary.
Water is cloudy or dirty	Insufficient filtration, poor water chemistry, heavy usage.	Run filter pump longer. Clean/replace filter cartridge. Test and adjust water chemicals (pH, chlorine). Shock treat the pool.
Water leaking from pool	Puncture in liner, loose hose connection, faulty drain plug.	Locate and repair puncture with a patch kit. Tighten hose clamps. Ensure drain plug is securely closed.
Algae growth	Low chlorine, high pH, insufficient circulation.	Increase chlorine levels. Adjust pH. Run filter pump more. Brush pool walls and vacuum.

SPECIFICATIONS

Feature	Detail
Brand	Bestway
Model Number	1056418XXX26
Dimensions (L x W x H)	3.66L x 3.66W x 1H meters
Shape	Round
Capacity	9150 liters
Material	Alloy Steel, Polyvinyl Chloride (PVC)
Special Features	DuraPlus™ Construction, FrameLink System™, Easy Installation, Increased Stability
Components Included	1 Pool, 1 Filter Pump (Type II cartridge compatible), 1 Ladder
Item Weight	37.89 Kilograms
Assembly Required	Yes
Usage	Outdoor

WARRANTY AND SUPPORT

For detailed warranty information, please refer to the documentation included with your product or visit the official Bestway website.

If you encounter any issues not covered in this manual or require further assistance, please contact Bestway customer support. Contact details can typically be found on the product packaging or the Bestway official website.

