

C100

使用说明书



安全注意事项

- 请将本音响系统安装在通风良好、阴凉、干燥、干净的位置，远离直射阳光热源、振动、灰尘、潮湿或寒冷。
- 只能使用本机指定的电压。使用高于指定数值的电压很危险，而且可能导致火灾，损坏本机或造成人身伤害。对于使用高于指定电压造成的任何损害，我司将不负任何责任。
- 不要试图自行改造或修理本机。如果需要任何服务，请与销售或者我司客服人员联系。不管有任何理由，都没有打开机壳的必要。
- 如果打算长时间不使用本机（比如度假时），请从墙壁交流电源插座上断开电源线的连接。

重要提示：

本说明书所提到的产品规格和资讯仅供参考。如有内容更新，恕不另行通知。

保修条款

一、服务期限

佛山双木三林科技有限公司承诺产品的良好品质，产品自售出之后7天内正常使用情况下出现故障，客户可以选择退货或者保修（不影响二次销售才可退货）。正常使用一年内出现故障可以免费保修。

二、购买日期以销售商开出的购机发票或收据日期为准，网购可以交易截图为准。

三、有以下情况都不能享受“三包”服务

1. 一切人为因素损坏，包括非正常工作环境下使用或不按照说明书使用。
2. 用户私自拆机、改装、维修。
3. 使用非指定或许可的配件造成损坏的。
4. 机身的QC或保修贴损毁。
5. 不能出示有效购机凭证。
6. 不属于本公司产品。

四、保修方式为送修

此条款只适于中国大陆，其它地区请参考当地销售代理商的规定和国家法规。

特点

- USB支持MQA;
- 超小型设计, 并且支持多种放置方式;
- 采用最新XMOS XU-316方案支持到32位768kHz和DSD512;
- 采用最新CK-03时钟系统, 大幅降低系统JITTER;
- 采用一片AKM新款AK4493S, 并且精心调校使其达到了前所未有的0.00013%;
- 内置高性能电源过滤系统, 使其仅使用USB接口供电就可以达到最佳性能!
- 阳极氧化CNC铝合金外壳;
- 日本电子音频协会Hi-Res认证;
- 全功能遥控。

技术参数


输入接口	USB、光纤、同轴、蓝牙	
输出电平	2.0Vrms	
THD+N	0.00013% (-117dB)	
动态范围	121dB	
信噪比	121dB	
USB传输方式	异步传输	
USB兼容性	Windows 7 / 8 / 8.1 / 10 / 11 Mac OS X10.6以上、Linux	
位深		
USB	1bit ~ 32bit	
光纤/同轴	16bit ~ 24bit	
采样率		
USB	PCM	44.1kHz~768kHz
	DSD	2.8224~22.5792MHz
光纤/同轴	44.1kHz~192kHz	
蓝牙规格	5.0	
消耗功率	<5W	
待机功耗	<0.1W	
体积	77.5 x 32 x 95mm (WxHxD)	
重量	190g/0.39lbs	

规格时有变更, 恕不另行通知。

关于遥控器

- 如果遥控器距离本机很近时操作仍无效，请用新电池更换。
- 如果要长时间不使用遥控器，请取出遥控器的电池。
- 按照电池处置的地方性法规处置废旧电池。


遥控器的使用

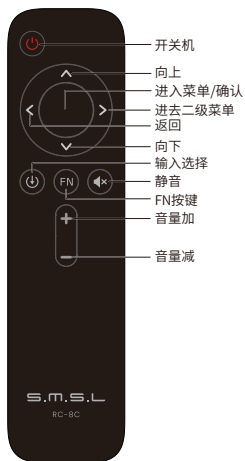

注意

遥控器请使用2节7号(AAA)电池

部件介绍

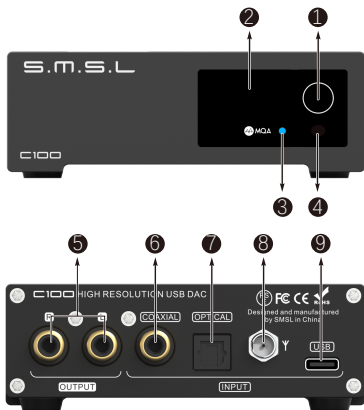

1 触摸按钮

2 显示屏

3 MQA指示灯

4 红外接收窗

5 单端线路输出

6 同轴输入

7 光纤输入

8 蓝牙天线

9 USB输入

C100包装清单

1x SMSL C100

1x USB线

1x 保修卡

1x遥控器

1x AC电源线

1x蓝牙天线

1x说明书

操作介绍

■ 电源 / 输入按键

- 长按“电源/输入”键关闭电源，短按打开电源。
- 短按“电源/输入”键切换输入源，输入会在“USB，光纤，同轴，蓝牙”之间切换，

在显示屏上的显示为 **USB** ↔ **OPT** ↔ **COR** ↔ **bt**

■ 关闭显示

C100 具备显示关闭的模式，这样可以使用户在没有光干扰的情况下更好的享受音乐！

- 使用遥控器上的“FN”按键控制本功能的开启或关闭。
- 当显示关闭时，任意操作，显示会自动点亮5s，然后再次关闭。

■ 显示说明

- 开机时，本机会显示 **100** 意思为 C100 的意思。
- 开机后，本机会依次显示2秒的 **100**，音量和当前采样率。
- 在没有输入信号或者采样率超出本机范围时，显示屏显示 **---**。
- 在切换输入时会显示 **USB**，**OPT**，**COR**，**bt**。
- 在调节音量时，显示音量大小，范围是 **-00** (最大) ~ **-40** (最小)。
- 在设置滤波器选项时，显示范围是 **FL1** ~ **FL6**。
- 在播放DSD文件时显示为 **64** 为DSD64，**128** 为DSD128，**256** 为DSD256，**512** 为DSD512。

操作介绍

■ MQA指示灯颜色说明

- 绿色： 表示正在播放MQA格式的流媒体或文件
- 蓝色： 表示正在播放MQA Studio文件
- 洋红色： 传输最终展开的MQA文件并显示原始采样率

■ 静音

- 使用遥控器上的静音按键操作，当静音时，如果显示没有处于关闭状态，显示屏则会闪烁音量的值。再次按下 MUTE 按键或调节音量则取消静音。

■ PCM滤波器设定

使用遥控器上的PCM滤波器切换按键对6种滤波器进行切换。

- FL1 (Sharp Roll-off filter 陡峭滚降)
- FL2 (Slow Roll-off filter 缓慢滚降)
- FL3 (Short Delay Sharp Roll-off filter 短延时陡峭滚降)
- FL4 (Short Delay Slow Roll-off filter 短延时缓慢滚降)
- FL5 (Super Slow Roll-off filter 超低延时缓慢滚降)
- FL6 (Low Dispersion Short Delay filter 短延时)

关于MQA

MQA (Master Quality Authenticated) 是一项屡获殊荣的英国技术, 是一种兼有极高的采样率和足够小的文件体积的高解析音频编码技术。C100采用MQA技术, 可以接收并解码MQA音频, 提供母带级别的声音。

有关更多信息, 请访问<https://www.mqa.co.uk/how-it-works>

MQA文件播放


- C100的MQA播放不要求使用特殊的播放软件, 例如foobar2000, Audirvanapls只要支持ASIO或者WASAPI的音频输出就可以了, 并且在播放MQA音频时, 最好将电脑的音量调到最大, 以使得电脑的音频输出是最佳状态。
- 在播放MQA文件时, 显示屏显示的采样率为音频原始采样率。



MQA和声波标志是MQA Limited的注册商标。©2016

C100

USER MANUAL

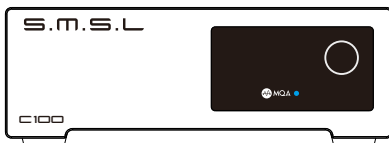

Safety Notes

- Install this unit in a well ventilated, cool, dry, clean place-away from direct sunlight, heat sources, vibration, dust, moisture, or cold..
- Use the voltage specified on this unit Only. Using this unit with a higher voltage than specified is dangerous and may cause fire , damage to this unit, or personal injury. Our company will not be held responsible for any damage resulting from the use of this unit with a voltage other than that specified.
- Do not attempt to modify or fix this unit by yourself. Contact alesperson or customer service when any service is needed. The cabinet should never be opened for any reason.
- When not planning to use this unit for long periods of time (i.e. when going on vacation), disconnect the power cable from the AC wall outlet.

Important note:

The product specifications and information mentioned in this manual are for reference only.
The content of this manual is subject to change without notice.

Warranty Terms

1.The Term of Service

Foshan Shuangmusanlin Technology Co., Ltd promises to offer good-quality products. If the product is broken in 7 days after purchasing when you use it normally, you can choose to send it back for return, replacement or repairing (only the product does not affect the second sales can be returned). Repairing for free in one year if you use it normally.

2.Date of purchase is in accordance with the date on invoice or receipt used by seller, and if you buy it on line, you can show the screenshot of trade.

3.If an inappropriate usage causes the unit damaged, the warranty will be void. As below.

- All damages by inappropriate use, including using it under non-normal working environment or without following the instructions.
- Dismantling, refitting, repairing by user in private.
- Causing damage by using some fittings instead of the designative or accredited ones.
- Cannot provide credible proof of purchase.

4.Sending it back to our company for repairing.

5.Contact your S.M.S.L Audio reseller for a return or replacement.

Features

- USB supports MQA;
- Ultra-tiny shape design and supports a variety of placement ways ;
- The latest XMOS XU-316 solution supports sampling rate up to 32bit/768KHz and DSD512;
- The new self-developed CK-03 clock processing circuit greatly reduces clock jitter;
- One pieces of AKM's new AK4493S chip, and carefully adjusted it to an unprecedented 0.00013% ;
- Built-in high-performance power filtering system, so that it can achieve the best performance using only one USB interface for power supply !
- Anodized CNC aluminum alloy housing ;
- Japan Electronics Association Hi-Res Audio certification ;
- Full-featured remote control .

Specifications


Input	USB / Optical / Coaxial / BT	
Output Level.....	2.0Vrms	
THD+N	0.00013%(-117dB)	
Dynamic range	121dB	
SNR	121dB	
USB compatibility	Windows 7 / 8 / 8.1 / 10 / 11	
	Mac OS X10.6 or Later / Linux	
Bit depth		
USB.....	1bit ~ 32bit	
Optical/coaxial	16bit ~ 24bit	
Sampling rate		
USB	PCM	44.1 ~ 768kHz
	DSD	2.28224 ~ 22.5792MHz
Optical/coaxial	44.1kHz ~ 192kHz	
Bluetooth specification.....	5.0	
Power Consumption	< 5W	
Standby power	< 0.1W	
Size	77.5x32x95mm (WxHxD)	
Weight	190g/0.39lbs	

Specifications are subject to change without notice.

Remote control

- Install 2 x AAA batteries as instructions.
- When using the remote control, point it toward the remote control signal receiver on the main unit from a distance of 5 m (16 ft) or less. Do not place obstructions between the main unit and the remote control.
- The remote control might not work if the remote control signal receiver on the unit is exposed to direct sunlight or bright light. If this occurs, try moving the unit. Beware that use of this remote control could cause the unintentional operation of other devices that can be controlled by infra.

Operating the remote control

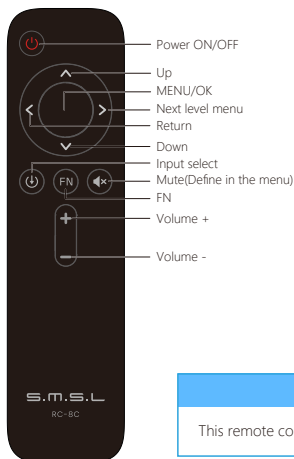

Note

This remote controller use 2 x R03/AAA batteries.

Display Interface and Instructions



- | | |
|-----------------------|---------------------|
| 1 Knob | 6 Optical input |
| 2 Display | 7 Coaxial input |
| 3 MQA Indicator light | 8 Bluetooth antenna |
| 4 Remote window | 9 USB Input |
| 5 RCA output | |

Package list

1* SMSL C100
1* USB cable
1* Warranty card

1* Remote control
1* AC power cable

1* Bluetooth antenna
1* User manual

Instructions

■ POWER / INPUT KEY

- Hold the key to switch power OFF, press the key to switch power ON.
- Press the key to switch INPUTS between "USB, COAXIAL, OPTICAL, BLUETOOTH" which display as

 ↔
  ↔
  ↔
 

■ TURN OFF THE DISPLAY

The C100 can be turned off the display for you to enjoy the music without light interfere.

- Use the "FN" key of remote controller to switch on or off this function.
- When in display-off mode, any operation will make display recovery for 5 seconds.

■ DISPLAY INSTRUCTIONS

- When starting up the unit, it will display  , which stands for C100.
- When starting up the unit, it will display 2 seconds of  , volume and current sampling rate in turn.
- When there is no input signal or the sampling rate exceeds the range of the unit, it will display as  .
- When switching inputs,  ,  ,  ,  it will display.
- When adjusting the volume, the volume is displayed in the range of  (max) ~  (min).
- When setting the filters, the displayed range is  ~  .
- When playing the DSD file,  is DSD64,  is DSD128,  is DSD256,  is DSD512.

Function introduction

■ MQA INDICATOR LIGHT COLOR INTRODUCTION

- Green: It means streaming or files in MQA format
- Blue: It means playing MQA Studio file
- Magenta: Delivering the final unfold of the MQA file and displays the original sample rate.

■ MUTING

- Press the MUTE key of the remote controller, the unit will mute the audio output, and if the display is not OFF it will flash the volume on the display.
- Press the MUTE key again or adjust volume will cancel muting.

■ PCM FILTER SETTING

Using the PCM filter switch button on the remote control to switch 6 filters.

- FL1(Sharp Roll-off filter)
- FL2(Slow Roll-off filter)
- FL3(Short Delay Sharp Roll-off filter)
- FL4(Short Delay Slow Roll-off filter)
- FL5(Super Slow Roll-off filter)
- FL6(Low Dispersion Short Delay filter)

About MQA

MQA (Master Quality Authenticated) is an award-winning British technology that delivers the sound of the original master recording. The master MQA file is fully authenticated and is small enough to stream or download. The C100 includes MQA technology, which enables you to playback MQA audio files and streams, delivering the sound of the original master recording.

Visit How it works <https://www.mqa.co.uk/how-it-works> for more information.

MQA files playback


- C100's MQA playback does not require additional software. You can use foobar2000 or Audirvana for MQA playback as it supports ASIO or WASAPI audio output. When playing MQA audio, it is suggested to adjust the volume of the computer to the maximum for the best audio output.
- The C100 LED next to MQA logo glows green or blue to indicate that the unit is decoding and playing an MQA stream or file, and denotes provenance to ensure that the sound is identical to that of the source material. It glows blue to indicate it is playing an MQA Studio file, which has either been approved in the studio by the artist/producer or has been verified by the copyright owner.
- When playing an MQA file, the sampling rate of the original master recording is displayed.

S.M.S.L



C100

取扱説明書

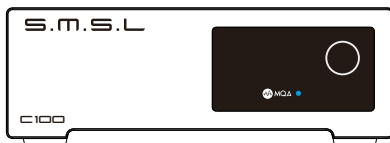

※改良等の理由により、予告なく仕様およびデザインを変更する事があります。 Ver 1.0

安全指示

- 商品は、風通しがよく、涼しく、乾燥した清潔な場所で、直射日光や熱源から離れた場所に設置してください。直射日光、熱源、振動、ほこり、湿気、寒さを避けてください。
- 本機に指定されている電圧のみを使用してください。規定以上の電圧を使用することは危険であり、火災や本機の破損の原因となります。規定以上の電圧を使用したことによる損害については、一切の責任を負いたしません。
- ご自分で本機を改造したり修理したりしないでください。サービスが必要な場合は、セラーまたは当社のカスタマーサービスにご連絡ください。
- 長期間ご使用にならない場合（休暇中など）は、電源コードをコンセントから抜いてください。

保証条件

一、サービス期間

S.M.S.L社は、製品の品質の良さを追求しています。通常の使用状態で販売日から7日以内に製品が故障した場合、お客様は返品または保証期間内の無料修理を選択することができます（二次販売に影響しない場合に限り返品可能）。正常な使用状態で1年以内に故障した場合は、無料修理対応いたします。

二、購入日は販売者が発行した購入請求書または領収書の日付が対象となり、オンライン購入の場合は取引画面のスクリーンショットが対象となります。

三、以下の場合、「返品/新品交換」のサービスの対象外となります。

- 通常の作業環境以外での使用や、指示に従わない場合など、人為的な要因で生じた損害。
- ユーザーが個人的に本機を解体、改造、修理した場合。
- 指定外の付属品やライセンスされた付属品の使用によって生じた損害。
- 本体に貼られているQCシールや保証書シールが破損した場合。
- 有効な購入証明書の提示がない場合。
- 当社の製品に属さないもの。

四、保証方法は配送による

その他の地域については、お客様の販売代理店の規定および各国の規定をご参照ください。

製品の特徴

- USBはMQAに対応します。
- 超小型設計で多点配置に対応します。
- 最新のXMOS XU-316ソリューションにより、32bit 768kHz、DSD512に対応します。
- 最新のクロックシステム「CK-03」を採用し、システムのJITTERを大幅に低減します。
- AKM AK4493Sを採用し、0.00013%になるように入念にチューニングしています。
- 高性能パワーフィルターシステムを内蔵し、USBポートだけで最適なパフォーマンスを実現します!
- アルマイト処理されたCNCアルミニウム製筐体。
- 日本電子オーディオ協会によるハイレゾ認定されます。
- フル機能のリモコン付きます。

入力インターフェース.....	USB、光、同軸、Bluetooth
出力レベル.....	2.0Vrms
THD+N.....	0.00013% (-117dB)
ダイナミックレンジ.....	121dB
SNR.....	121dB
USB伝送方式.....	非同期転送
USB互換性.....	Windows 7 / 8 / 8.1 / 10 / 11 Mac OS X10.6以降、Linux
ビット深度	
USB	1bit ~ 32bit
光／同軸.....	16bit ~ 24bit
サンプリングレート	
USB.....	PCM 44.1kHz~768kHz
	DSD 2.8224~22.5792MHz
光／同軸	44.1kHz~192kHz
Bluetooth仕様.....	5.0
消費電力.....	<5W
待機時消費電力.....	<0.1W
サイズ.....	77.5 x 32 x 95mm (WxHxD)
重量.....	190g/0.39lbs

リモコンについて

- リモコンを近くで操作しても動作しない場合は、新しい電池に交換してください。
- リモコンを長期間使用しない場合は、リモコンから電池を取り外してください。
- 使用済みの電池を廃棄する際は、地域の電池廃棄に関する規制に従ってください。


リモコンの使い方



ご注意

リモコンにはNo. 7 (AAA) 電池2本をご使用ください。

部品について

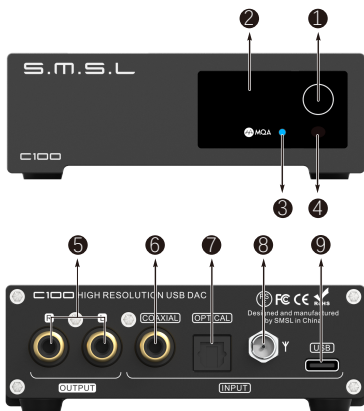

- | | |
|----------------|---------------|
| 1 タッチボタン | 6 同軸入力 |
| 2 表示画面 | 7 光入力 |
| 3 MQAインジケータ | 8 ブルートゥースアンテナ |
| 4 赤外線受信窓 | 9 USB入力 |
| 5 シングルエンドライン出力 | |

C100付属品内容リスト

- | | | |
|--------------|-------------|------------------|
| 1x SMSL C100 | 1x リモコン | 1x Bluetoothアンテナ |
| 1x USBケーブル | 1x AC電源ケーブル | 1x 取扱説明書 |
| 1x 保証書 | | |

操作説明

■ 電源/入力ボタン

- 「電源/入力」ボタンを長押しすると電源が切れ、短く押すと電源が入ります。
- 「電源/入力」ボタンを短く押すと入力ソースが切り替わり、表示画面は「USB、Optical、Coaxial、Bluetooth」が表示されます。

USB ↔ OPT ↔ COA ↔ bT

■ ディスプレイを閉じる

C100はディスプレイオフモードを搭載しており、光の干渉を受けずに音楽を楽しむことができます。

- この機能は、リモコンの「FN」ボタンでオン／オフを切り替えます。
- ディスプレイの電源を切ると、自動的に5秒間点灯し、その後、何らかの操作で再び消灯します。

■ 説明を表示する

- スイッチを入れると、C100を意味する **100** と表示されます
- スイッチを入れると、2秒間で **100**、音量、現在のサンプルレートを順に表示されます。
- 入力信号がない場合、またはサンプリングレートがローカルレンジ外の場合は、**---** と表示されます。
- 入力切替時は、**USB** **OPT** **COA** **bT** が順に表示されます。
- 音量調整する時は、**-00**（最大）～ **-40**（最小）の範囲で音量が表示されます。
- フィルターオプションを設定する場合、**FL1** **FL6** の範囲で表示されます。
- DSDファイルを再生する場合、DSD64は **64**、DSD128は **128**、DSD256は、**256**、DSD512は **512** と表示されます。

操作説明

■ MQAインジケータ表示の説明

- 緑: MQA形式のストリームまたはファイルを再生中であることを示します。
- 青: MQAStudioファイル再生中であることを示します。
- 赤: 最終的に拡張されたMQAファイルを転送し、オリジナルのサンプルレートを表示します。

■ ミュート

- リモコンのミュートボタンで操作し、ミュート時はディスプレイの電源を切っていない場合、ボリュームの値を点滅させます。もう一度ミュートボタンを押すか、音量を調節すると、ミュートが解除されます。

■ PCMフィルター設定

リモコンのPCMフィルター切り替えボタンで、6つのフィルターを切り替えることができます。

- FL1 (シャープローロールオフフィルター)
- FL2 (スローローロールオフフィルター)
- FL3 (短遅延シャープローロールオフフィルター)
- FL4 (短遅延スローローロールオフフィルター)
- FL5 (スーパースローローロールオフフィルター)
- FL6 (低歪みショートディレイフィルター)



MQAについて

MQA (Master Quality Authenticated) は、ハイレゾリューションオーディオのエンコードにおいて、非常に高いサンプルレートと十分に小さいファイルサイズを組み合わせた、数々の賞を受賞した英国の技術です。

MQAオーディオは、マスタークオリティーのサウンドを提供します。

詳細については、<https://www.mqa.co.uk/how-it-works>

MQAファイルの再生

- C100でのMQA再生には、foobar2000やAudirvanaplusなどの特別な再生ソフトウェアを使用する必要はありません。ASIOまたはWASAPIのオーディオ出力に対応していれば良いのです。また、MQAオーディオを再生する際には、パソコンのオーディオボリュームを最大にして、パソコンのオーディオ出力が最適になるようにします。
- MQAロゴの横にあるインジケーターが緑または青に点灯するのは、本機がMQAオーディオまたはファイルをデコードして再生し、出力される音質がソースと一致していることを示しています。青色のランプは、MQA Studioファイルを再生中であることを示しています。このファイルは、アーティスト/プロデューサーまたは著作権者によってライセンスされています。
- MQAファイルを再生する場合、ディスプレイに表示されるサンプルレートは、オーディオのオリジナルのサンプルレートです。



MQAとソニックサインはMQA Limitedの登録商標です。©2016