

**OOSXX**



Please Scan QR code Register in 7 days

Customer Service:

Tel: +1 (352) 900-4656 Working time: Eastern time Monday - Friday 9:00am - 5:00pm

Email: info@oosxx.com (reply in 24 hours)

www.oosxx.com

## OOSXX HD POE Security System Manual



**OOSXX**

www.oosxx.com

**Thank you for purchasing our products. Be sure to read this instruction manual thoroughly before use the product appropriately**

1. After receiving the product, Please double check product parts. Contact our customer service if it has damaged or missing parts, wrong item, etc.
2. We recommend that you do the installation work after confirming that the product is working properly. (Make sure the camera image is properly displayed on the monitor or HD TV.)
3. Before installation, please scan the following link or QR code to watch the installation demo video on Youtube.



<https://www.youtube.com/watch?v=tCXUHHNndKM>

4. Cannot get any display on home monitor from the NVR system: There is NO Picture if All-in-One Computer or Laptop is Connected to NVR Box Directly. Please DON'T Do That.  
The default output resolution of the NVR system may not be compatible with some monitors. If the image does not display properly when connected to monitor, please refer to "14. FAQ 12".
5. To make sure the safety of your system, please change the password on your monitor screen. Right Click on the home screen of your monitor, navigate to System setup>System admin, click User on the left menu bar >Set password>Create a password and type it in the field (Keep it short. 8 characters Max.)> repeat new password>Click ok. Be sure to remember your password.

6. Depending on the production time, the product information in this manual may differ from the actual product. Note that it matches the real product.

## Safety Notice

1. Please do not store or use the NVR in a place that is hot, humid, dusty or oily, or subject to vibration.

2. Please place the NVR horizontally and install it in a well-ventilated place. Do not block the ventilation holes.

3. Please do not place anything on the NVR. Be careful not to get wet.

4. Please note that if the ambient temperature and humidity are high, water vapor may appear inside the product due to the temperature difference.

5. Check the supply voltage. Please do not use voltages other than the indicated power supply voltage. Keep power cords away from heating equipment.

6. If dust collects inside the device, it may cause malfunction. We recommend that you clean it regularly. Be sure to turn off the power when cleaning this product.

7. For your safety, please be sure to turn off the power when moving or not in use for a long time.

8. If you find abnormal conditions such as smoke and odor, please stop using it immediately and turn off the power.

## DIRECTORY CONTENT

1. Introduction	1
2. System Components	3
3. Installation Settings	4
3.1 Connect NVR to AC power adapter	4
3.2 Connect NVR to monitor with HDMI/VGA cable	4
3.3 Connect the mouse to the USB port at the back of NVR	4
3.4 Log in your account	6
3.5 Connect the camera to the NVR with LAN cable	6
3.6 Pair cameras to the system	6
4. APP Settings	7
4.1 Download	7
4.2 Register	8
4.3 Connect POE Surveillance System to APP	8
4.4 APP function description	11
5. Laptop Settings	11
5.1 Please download CMS Eseecloud on OOSXX website	11
5.2 Install CMS on your computer/laptop/Mac	11
5.3 Login to Eseecloud, username: admin, password keep in blank	11
5.4 Click ADD to add your camera system on computer	12
5.5 Fill in CLOUD ID, PASSWORD, NUMBER OF CHANNELS	12
5.6 Click FINISH and wait for a few minutes to have cameras add to your system	12
5.7 You can PLAYBACK, RECORD and SCREENSHOT (Hard drive is required to have these functions)	13
6. Email Settings	13
6.1 In the E-mail setup interface, the following items need to be configured	14
7. HDD Settings	16
7.1 Auto overwrite settings	16
7.2 Format hard drive	16
7.3 Optional Hard drive installation	17
8. Record Settings	18
8.1 Set up automatic deletion of old files	18

8.2 Continuous Recording(24 hours recording).....	19
8.3 Time Recording(time zone specified recording).....	19
8.4 Motion Detection Recording.....	19
9.Video Playback.....	20
10.Video Backup.....	21
11.Motion Detection.....	21
11.1 Three ways to receive alarm when motion is detected.....	21
11.2 Notification Settings.....	22
11.3 Function Description.....	22
11.4 Detection Area Change Settings.....	23
12.Audio Function Settings.....	23
12.1 Audio Function.....	23
12.2 Volume Control.....	25
13.Other Settings.....	26
14.Frequently asked questions.....	27
15.Customer Service.....	30
16.Sponsored.....	31

## 1.Introduction

### Product parameters

#### POE Security NVR Specification

Name	OOSXXX POE NVR
Video input	4ch/8ch/16ch HD 5.0MP/8.0MP
HDMI Output	1ch,Resolution: 1024x768,1280x1024,1366x768,1440x900,1920x1080,4K/30Hz
VGA Output	1ch,Resolution: 1024x768,1280x1024,1366x768,1440x900,1920x1080
Resolution	HD 5.0MP/8.0MP
Playback	1ch/2ch
Recording	Manual, time, motion detection, alarm
Storage	1 SATA
Storage capacity	MAX 6TB for each HDD
Network interface	1 RJ45 100M
USB interface	2 USB2.0
Power consumption	≤15W without hard drive
working temperature	-4°F--+140°F
Working humidity	10%~90%RH
Dimension (mm)	258mm×210mm×42mm
Power	DC 48V 2A

#### POE Camera Specification

Technical Parameters	Model	5.0 Megapixel	8.0 Megapixel
	Sensor	1/3" Progressive Scan Sensor	1/3" Progressive Scan Sensor
	Signal System	PAL/NTSC	PAL/NTSC
	Resolution	2560 x 1960 16 : 9 High Definition	3840 x 2160 16:9 High Definition
	Minimum illumination	Color: 0.1 Lux, B/W: 0.01 Lux	
	Shutter	1/25s to 1/25,000s	
	Lens3	3.6mm	
	OSD	Date Time & Time(NVR system can change Title name)	
	White Balance	Auto	
	Day & Night	IR cut filter with auto switch	



Technical Parameters	3D-DNR	Auto
	Mirror/Flip	On / Off(NVR system setup)
	Signal /noise rate	> 39.1 Db
	Interface	RJ45
	Anti-thunder Level	Standard IEC61000-4-5
General Specification	Working Temperature/Humidity	-4°F to +140°F / 30% to 80% RH
	Storage Temperature/Humidity	-20°F to +180°F / 20% to 90% RH
	Power Input	DC12V-1A
	Power consumption	≤6W
	Size	66*180mm
	Weight	500g
	Level of Protection	IP67

Before setting camera system, please visit our website: [www.oossxx.com](http://www.oossxx.com) to watch demo videos. You can also scan the QR code below to get our after+sales support.



Facebook Online Service


Setup Demo Video  
Or Visit

<https://www.youtube.com/watch?v=ICXuHHNdKM>

Oossxx

## 2.System Components


POE camera X 2/4/8/16  
 POE 8 Channel Network Video/Audio Recorder X 1  
 POE NVR power supply 48V DC X 1  
 Ethernet cable for cameras 18.2 meters (60ft) X 2/4/8/16  
 Network cable 3 feet X 1  
 Waterproof connector for network cable X 2/4/8/16  
 Camera screw pack X 2/4/8/16  
 Hard Drive(pre-install,if you purchase kit with hard drive) X 1  
 HDMI cable & USB mouse X 1  
 Manual X 1  
 Sticker X 4/8

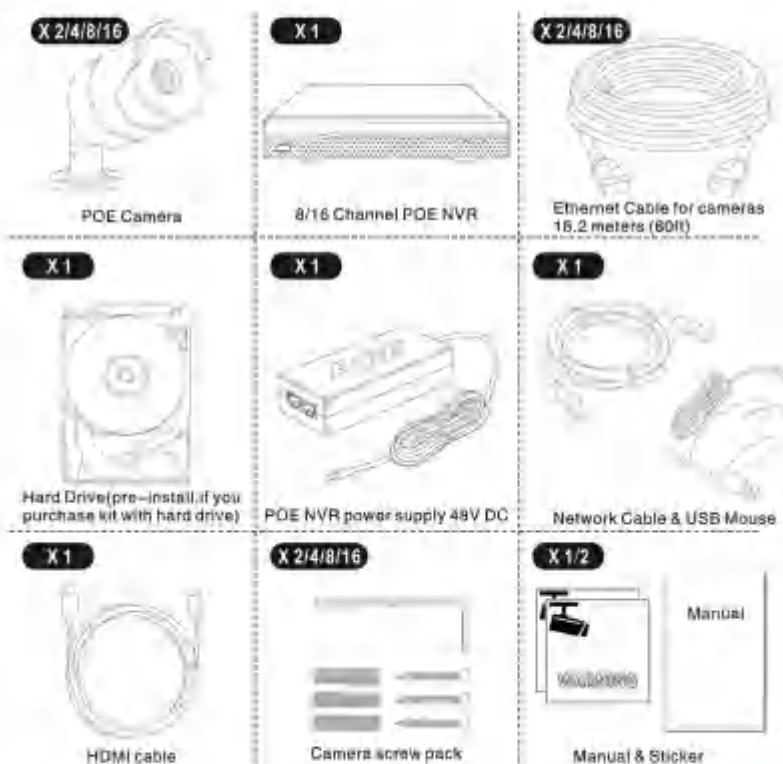

The Appearance of The Product will Vary According to The Configuration

Oossxx

### 3.Installation Settings

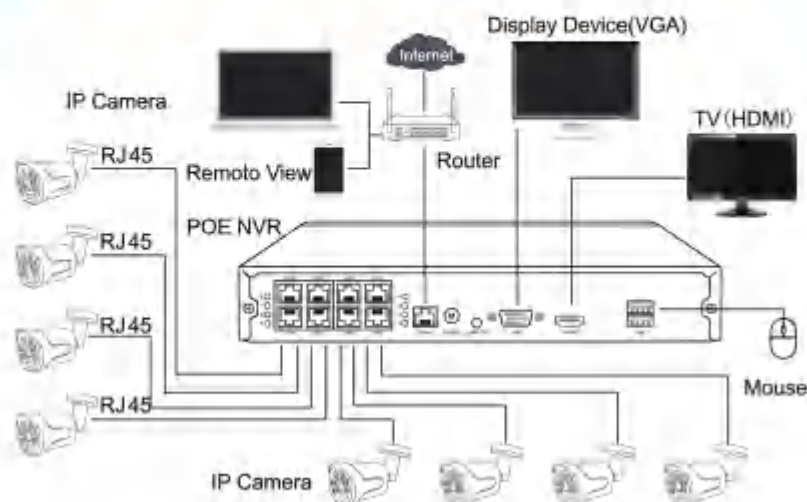

#### 3.1 Connect NVR to AC power adapter.

##### ⚠ Note:

NVR AC power adapter is 48V 2A. Please make sure the power connect is right, Power adapter supports input from AC 110-240V.



#### 3.2 Connect NVR to monitor with HDMI / VGA cable

##### ⚠ Note:

Please do not use laptop monitor or all-in-one PC as camera system monitor. TV or PC monitor would be a perfect choice.  
Please use a HDMI cable or a VGA cable to connect NVR to monitor.  
Switch TV to HDMI mode or VGA mode.

#### 3.3 Connect the mouse to the USB port at the back of NVR

### POE NVR System

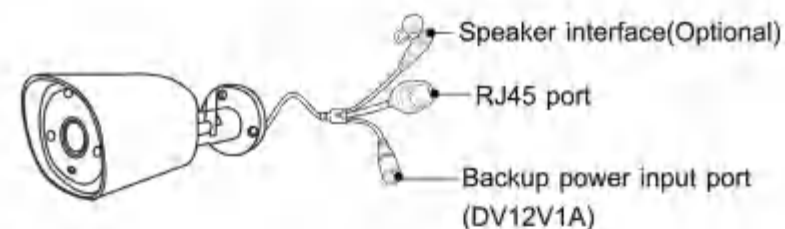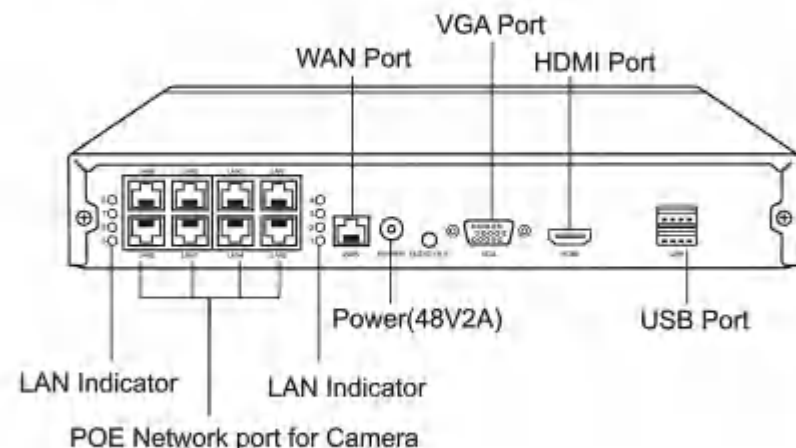

### Interface description

WAN port: Connects to the Internet.

VGA port: Hooked up to liquid crystal display.

HDMI port: Connects to high-definition TV.

USB port: Connects to mouse or USB Device.

NVR power input: 48V 2A.

RJ45 port: For matching code and wired connection between IPC camera and NVR. Our POE NVR kit is already matched code before delivery. If you need to re-match code, please refer to how to add IP camera (as shown in 3.6).

### 3.4 Log in your account

#### ⚠ Note:

No password is required for first time log in, as shown below.

There's no password for initial log in, shown as picture below, Please change your password after initial system setup..

#### Password Setup:

- 1) Open the "System Setup" → "System Admin" → "User" → "Set Password" screen from the main menu.
- 2) Enter password (up to 12 digits).

### 3.5 Connect the camera to the NVR with LAN cable.

Cover the lens part of the camera with your hand and check if the infrared LED light glows red.

If it does not glow red, the infrared may not be working properly, please contact customer service for help.

### 3.6 Pair cameras to the system

#### ⚠ Note:

Cameras are paired to system as default by manufacturer. If cameras lose signal or you need to add other cameras to system, please follow the instructions below to pair them manually:

- (a) Connect camera to NVR by ethernet cable.
- (b) Right click on the main interface and select Video Manage (If need password, please refer to step 4 mentioned above: Log in your account)
- (c) Change Protocol to N1, and click REFRESH.

(d) When camera is detected by system, camera information will show up in the upper top table as picture below and then click Add.



(e) After added successfully, camera information will be moved to bottom table, and seen as added device. Please make sure that camera status is CONNECT SUCCESS.

Repeat step 6 if more cameras need to be added.

#### ⚠ Note:

After cameras are connected successfully, you can mount the camera to the location as planned.

## 4. APP Settings

#### ⚠ Note:

Please connect NVR to Router in your property by Ethernet cable. To remote access your camera system, Internet support is required.

### 4.1 Download

(a) Scan QR code below to download 'Honestview' App. It can also be downloaded from app store. Or search 'Honestview' in app store and download accordingly or Use Backup APP 'Eseecloud'.





Honestview APP



Backup APP 'Eseecloud'

## 4.2 Register

First an account has to be created by using your email or phone number, then a verification code will be sent to your email or phone number, then you can log in.

### ⚠ Note:

Eseecloud is only compatible with system versions above IOS 9.0 and Android 5.1

## 4.3 Connect POE Surveillance System to APP


There are two ways to connect a POE system to APP

- (a) Scan QR code
- (b) Log in your cloud account

(a) Scan QR code

Click the '+' icon in the upper right corner to enter the scan code interface

**OOSXX**

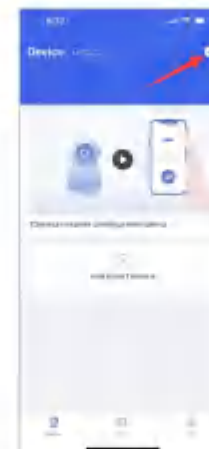

Scan Cloud ID QR Code on NVR




Or Scan the QR code at NVR System "System Setup" -> Network Setup -> "Network Setup"

**OOSXX**




(b) Log in your Cloud account

Click the '+' icon in the upper right corner to enter the scan code interface, then click 'other ways to add'

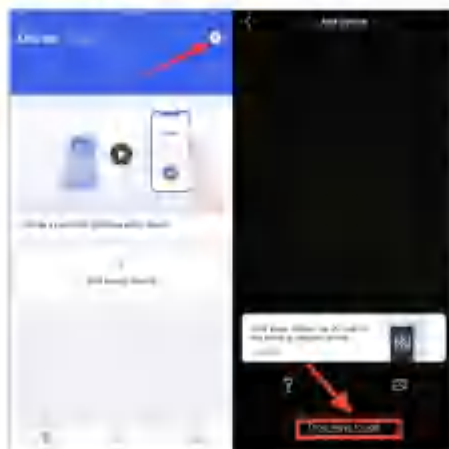

Choose 'kit', then enter your Cloud ID you can find your Cloud ID at NVR cover or system network setup. The Password is the same with your camera system.

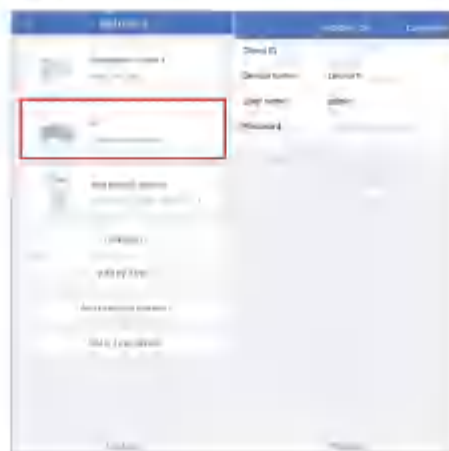

#### ⚠ Note:

No password required in first time system setup, just enter your Cloud ID, then click 'complete' in the upper right corner, wait for few seconds until add device successfully.

**OOSXX**

## 4.4 APP function description

- [ Cloud Service ] : Enter the cloud service.
- [ News ] : You can view motion detection notification messages.
- [ Share ] : You can grant the camera monitoring permission to others. Up to 3 terminals can be monitored simultaneously.
- [ Play ] : recordings saved in HARD DRIVE in NVR box, You can play the saved recording. Hard disk (HDD) is required to use this feature.
- [ Device ] : Display all camera systems added to the APP.
- [ Mail ] : Enter the mail.
- [ Me ] : You can view information, settings, management, etc. Enter cloud services.
- [ SD ] : Switch between high definition (HD) and standard definition (SD) modes.
- [ Sound ] : You can hear the sound of the monitored location
- [ Screenshots ] : You can save screenshots.
- [ Recording ] : You can record surveillance images on your smartphone.
- [ Full Screen ] : You can display in full screen.
- [ Zoom ] : You can zoom the screen, Only products with PTZ function are supported.
- [ PTZ ] : You can control the pan/tilt/zoom functions of the camera. This function is only compatible with products with PTZ function.
- [ Alarm ] : Click to make an alarm sound.
- [ Intercom ] : Press and hold the call to talk through the camera. This feature is only available for products with call function..

## 5.Laptop Settings

5.1 Please download CMS EseeCloud on [www.oosxx.com](http://www.oosxx.com) website.

#### ⚠ Note:

Please visit: [www.oosxx.com](http://www.oosxx.com). Click Download.

For PC(Windows), please download: CMS Program for PC (Windows)


For MAC, please download: CMS Program for Mac

5.2 Install CMS on your computer/laptop/Mac.

5.3 Login to Eseecloud, username:admin,password keep in blank Without password, need not input.

**OOSXX**

5.4 Click ADD to add your camera system on computer.

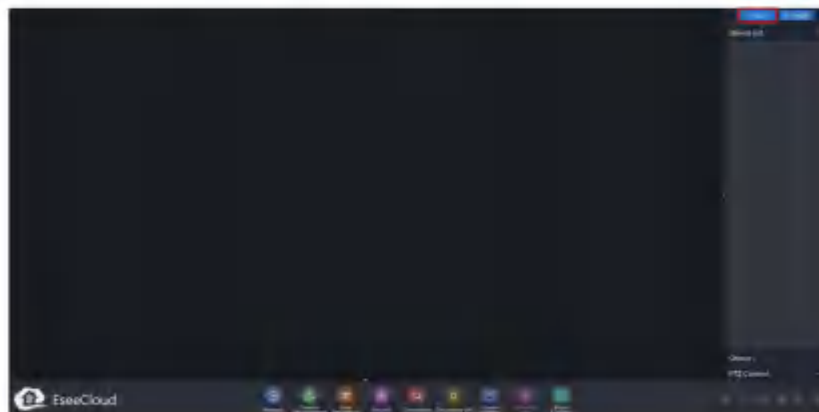


5.5 Fill in CLOUD ID, PASSWORD, NUMBER OF CHANNELS.

**Note:**

Cloud ID is at the right down corner of your monitor, please keep Cloud ID online by connect NVR to router with an Ethernet cable.

PASSWORD is your camera system password.


Number of Channels means the number of your cameras.

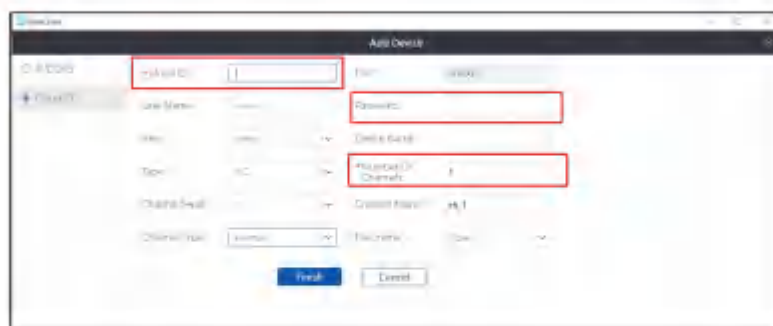

5.6 Click FINISH and wait for a few minutes to ensure that cameras are add to system successfully.

**OOSXX**

5.7 You can PLAYBACK, RECORD and SCREENSHOT (Hard drive is required to achieve these functions).

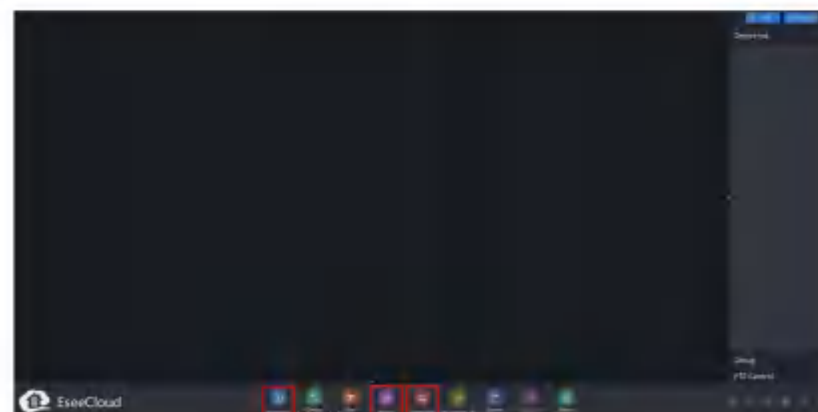

## 6.Email Settings

**Note:**

Go to System setup-Channel setup-motion detection, select the channel as need, check on 'Email notice', click 'apply' to network setup-Email.




**OOSXX**

## 6.1 In the E-mail setup interface, the following items need to be configured:

- (a) Enable E-mail function
- (b) SMTP Server: The input format is smtp.live.(yahoo./gmail./com)
- (c) Port is 25
- (d) Username: Your username of your mailbox (for example: if your mailbox is test123@hotmail.com, your username is test123@hotmail.com)
- (e) Password: Password of your email. The password must less 10 letters.
- (f) Encryption Type: You don't need to select it, but if the test fails, modify it to SSL
- (g) Sender: Your email address(for example: test123@hotmail.com)
- (h) Sendee: The email address you use to receive email from the sender (for example: dvrtest2015@gmail.com)
- (i) Subject: default is ok, you can change according to your need
- (j) Interval: The time interval for receiving emails (if you set a high frequency of alerts and the capacity of the receiving mailbox is small, it may be impossible to receive new alerts due to insufficient capacity)
- (k) Enable Health Mail:Used to detect the NVR's input is running normally
- (l) Health mail interval: The time interval for sending messages when the device is running normally

### ⚠ Note:

Please enable POP/IMAP in your email account settings.

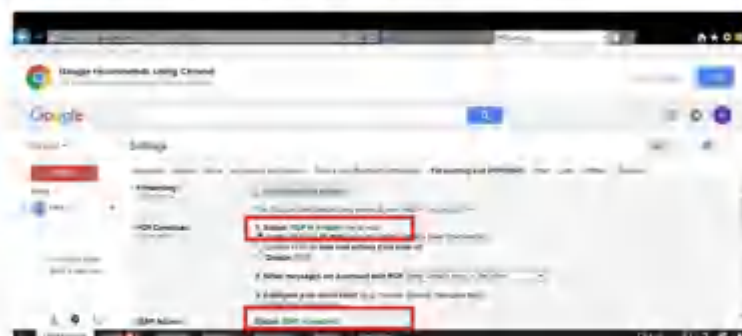

OOSXX

## Mailboxes such as Gmail/Yahoo need to set NVR App Password

Login yahoo account, close "two-step verification", meantime Allow apps that use less

secure sign in. As below:



OOSXX



## 7.HDD Settings

### 7.1 Auto overwrite settings


- (1) Click "System Setup" -> "General Setup" -> "HDD Setup" in the main menu.
- (2) "Overwrite" ☒ If the hard drive capacity limit is exceeded, the oldest recorded data will be automatically overwritten. Check it and click Apply.

### 7.2 Format hard drive

- (1) Click "System Setup" -> "General Setup" -> "HDD Setup" in the main menu.
- (2) Display hard drive information, select the hard drive to be formatted.
- (3) Click the "Format" button.

#### ⚠ Note:

All data will be deleted after formatting the hard drive.

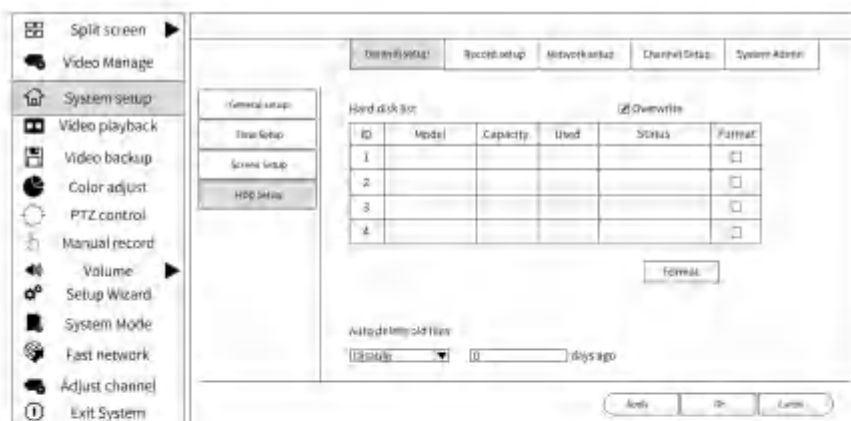

00SSXX

### 7.3 Optional Hard drive installation(If original NVR system was purchased without installed HDD)

#### ⚠ Note:

Please turn off all power before installation.

- (1) Unplug your NVR from power, unscrew and remove the top cover.
- (2) Connect the SATA cable and data cables from the NVR to the corresponding ports on your HDD(as shown).
- (3) Test if hard drive is functional before put cover back to NVR. If you turn on the power of the NVR without closing the cover, and the hard drive is powered on, you will feel a noticeable vibration in your hand. If you don't feel vibration, try another HDD and try connecting again.
- (4) Hold the hard drive and NVR, gently turn it over and line up the holes on the hard drive with the holes on the NVR. Using a Phillips screwdriver, screw the provided screws into the holes. Assemble the cover.



00SSXX



## 8. Record Settings

### ▲ Note:

The default setting is continuous recording (24-hour recording) mode.  
Open System Setup -> Record Setup screen of the main menu.

### 8.1 Set up automatic delete of old files

#### 1. Set up automatic deletion of old files

(1) Click SYSTEM SETUP, GENERAL SYSTEM, HDD SETUP.

The screenshot shows the 'HDD Setup' screen. At the top, there are tabs: General Setup, Record Setup, Playback Setup, Channel Setup, and System Setup. On the left, there are buttons: General Setup, Time Setup, Channel Setup, and Web Setup. The main area displays 'Hard disk list' with a table of 4 disks. Below the table is a 'Format' button. At the bottom, there is an 'Auto delete old files' section with a dropdown menu set to 'Custom' and a text input field set to '30' days ago. At the very bottom are 'Back', 'OK', and 'Cancel' buttons.

ID	NAME	CAPACITY	USED	STATUS	Format
1					<input type="checkbox"/>
2					<input type="checkbox"/>
3					<input type="checkbox"/>
4					<input type="checkbox"/>

(2) Click DISABLE, and switch it to CUSTOM, and select days that you want to record( 4 cameras and 1 TB hard drive, can record about 30 days).

### ▲ Note:

You can choose the automatic coverage mode. The system will automatically delete the old video and keep the new video when the hard disk is full recorded. You can also set your own date to periodically delete old recordings.

### 8.2 Continuous Recording (24 hours recording)

- (1) Select the desired channel for continuous recording.
- (2) Click the red "Time" button.
- (3) Click "Select All", and then click "Apply".
- (4) If you want to make the same settings for other channels, click "Copy to", select the channel number, click "OK", and click "Apply".

### 8.3 Time Recording (time zone specified recording)

- (1) Specify time zone. Select the channel to be recorded.
- (2) Click the red "Time" button.
- (3) Hold down the left mouse button and drag to select the date and time zone to be recorded, and click "Apply" to specify the recording time zone.
- (4) You can cancel the selected time zone by holding down the left mouse button and dragging the selected time zone and clicking "Cancel".
- (5) If you want to make the same settings for other channels, click "Copy to", select the channel number, click "OK", and click "Apply".

### 8.4 Motion Detection Recording

- (1) Select the desired camera channel for motion detection recording.
- (2) Click the green "Motion" button.
- (3) Hold down the left mouse button and drag to select the date and time zone of the motion detection recording, and click "Apply" to specify the time zone of the motion detection recording.
- (4) You can cancel the selected time zone by holding down the left mouse button and dragging the selected time zone and clicking "Cancel".
- (5) If you want to make the same settings for other channels, click "Copy to", select the channel number, click "OK", and click "Apply".




## 9.Video Playback

### Note:

Only system with hard drive supports video playback.

- 1.Right click at home video page, click VIDEO PLAYBACK.
- 2.Select the date and time, channels that you would like to play back.
- 3.If necessary, select TIME and MOTION play back.

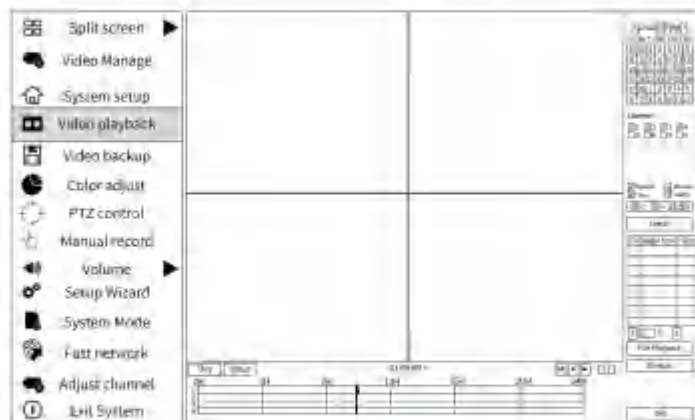

00SSXX

## 10.Video Backup

### Note:

Only system with hard drive supports video backup.

- 1 Right click at home video page, click VIDEO BACKUP.
- 2 Select date, time and channel that the video you would like to backup, and click SEARCH.
- 3 Select the videos that you would like to BACKUP, and click BACKUP button.
- 4 The screen will start count down for one minute, and please quickly unplug the mouse, and insert USB. The system will automatically backup videos in the USB.



## 11.Motion Detection

11.1 There are three ways to receive alarm when motion is detected.

(1)Buzzer: System will make alarm, and a triangle alarm sign will show on the left down corner of the screen. Click it, you will see the date, time and channel information when the motion was detected.

(2)Email: A notification will be sent to your email when the motion was detected with a screen shot of the motion.

00SSXX

✓(3)APP: A notification will be sent to you when the motion was detected.

## 11.2 Notification Settings

Open the "System Setup" -> "Channel Setup" -> "Video Detection" interface of the main menu.

- (1) Channel: Select the channel that needs email notification, and check "Enable" ✓.
- (2) Detection: Select "Motion".
- (3) Check ✓ before "E-Mail Notice". You will be notified by email when movement is detected on the corresponding channel. Check it and click Apply.

### Note:

Please enable Notification function in your cellphone



## 11.3 Function Description

- ✓ Buzzer: The NVR has a built-in buzzer, when enabled, the buzzer will sound. When enabled, NVR will beep when motion is detected.
- ✓ Email Notice: When enabled, you will receive a notification email when motion is detected.

- ✓ APP Alarm: When enabled, the APP will send a notification when motion is detected. (Note: Please turn on the notification function of your smartphone.)
- ✓ Full Screen: When enabled, the alarm camera's screen will be enlarged.

## 11.4 Detection Area Change Settings

### Note:

By default, full screen is the detection area. Click "System Setup" -> "Channel Setup" -> "Video Detection" -> "Edit Area" in the main menu to open the detection area editing interface.

- (1) Right-click "Clear All".
- (2) Hold down the left mouse button and drag to specify the area to be detected.
- (3) Right-click "Return".
- (4) After completing the settings, click "Apply".

## 12. Audio Function Settings


### 12.1 Audio Function

- (1). Right click with the mouse > Select "System Setup"  
(The login interface appears for the first operation. The default password is blank. Please select "OK" to log in.)
- (2). Select "Channel Setup" > Select a "Channel" > Configure the "Encode Mode" as "AV Stream" > Click "Apply"

### Note:

- (1) Do not install the camera in a noisy environment where the sound quality is disturbed for effective recording.
- (2) Please select the appropriate volume level in order to effectively record sound.
- (3) Do not install the camera near noisy equipment, such as machines or electrical machinery.



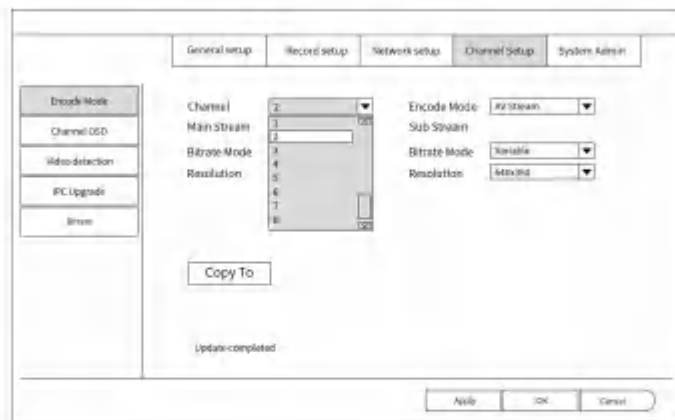

## Help

### What should I do if I turn on audio function but still no sound?

1. Make sure the monitor has a speaker, and the NVR and the monitor need to be connected through an HDMI cable.
2. Please confirm whether the camera has audio function and check if your camera has a microphone hole. (As shown below)



3. The NVR only play audio from one single camera each time, please make sure that turn on the audio of the selected camera.



**00SSXX**

4. Please confirm whether the volume of both the monitor and the NVR are appropriate. (As shown below)



## 12.2 Volume Control

- (1) You can select "System Setup" -> "General Setup" -> "Volume" in the main menu to adjust.
- (2) Click the Audio marker on the toolbar at the bottom of the main monitoring screen to turn audio on or off.



### Toolbar Description

- Click to turn audio on/off.
- Once selected, you can slide the mouse to zoom the screen.
- Click to turn on/off floodlight lighting. (Only for products with floodlight.)
- When selected, you can control the PTZ. (Only products with PTZ function can be used.)


**00SSXX**



## 13. Other Settings

### 1. Channel Switch

Example: If want Exchanging "Channel 1" and "Channel 3", Please Click the "Video Manage" of main menu, Choice "Channel 1", Click up and down arrows of the left, the Channel list will move "Channel 1" Exchange to other Channel.

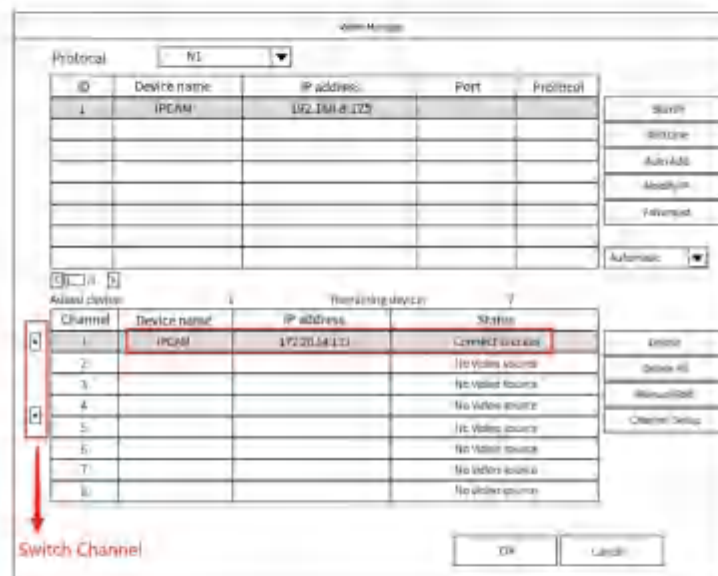

### 2. Screen Flip

(1) Open the "Video Manage" screen of the main menu, select the channel to be flipped, and click "Manual Edit".  
(2) Click "Image Rollover", and then click "OK".

### 3. Change Resolution

Main menu "System Setup" → "General Setup" → "Screen Setup" → "VGA Resolution" can be changed.

### 4. System Version Information

Go to system setup-system admin-system version.

### 5. Firmware Upgrade

For system security, if you need to upgrade the firmware, please contact customer service to provide the corresponding firmware.

### 6. Restore Factory Settings

#### ⚠ Note:

- (1) After factory configuration, all NVR system settings and recordings will be reset.
- (2) Please backup your important data before clicking "Factory setting".
- (3) After reset, the camera needs to be added (paired) to the NVR system again.
- (4) Steps: please right click the main interface, select System setup > System Admin > Factory setting, then click Apply > Yes > OK.

### 7. Time Settings

Open the "System Setup" → "General Setup" → "Time Setup" interface of the main menu.

- (1) If you have connected to the Internet:  
Set "Enable" for "Sync Time" ✓, wait a few minutes to check if the time is in sync. Check it and click OK.
- (2) If there is no synchronization or no network environment: Click "Advanced" to manually set the time.

## 14. Frequently asked questions

### 1. How long is my warranty?

We provide one year warranty for the camera system, including cameras and NVR. It started from the purchase date on your receipt.

### 2. How do I reset password?

Please understand that we are very strict with resetting password for security reason. Please email customer service with your Amazon or Walmart order number, your full name and address. The email address is: info@oossxx.com

### 3. Can I add more cameras?

Yes. Each NVR box can take 8 cameras maximum. You can add more cameras if you have less than 8 cameras now.



- b) Unplug the NVR and plug it back in again. When you turn on the power, you will hear a beeping sound. You can confirm that the NVR is running.
- c) It will take 2 to 3 minutes for the NVR to fully boot, please wait for a while. Press and hold the left mouse button for about 15 seconds, then release the mouse when you hear a beep. Please check that the image is displayed properly.
- d) Since the HDMI cable may not display, please try to connect with another HDMI cable.
- e) Set the HDTV to VGA mode and connect it with a VGA cable to check if it is normal.

★ If the above screen does not appear.

Try connecting to another monitor with VGA cable. If the screen is displayed on another monitor, right mouse button → "System setup" "General setup" "Screen setup" Change "VGA resolution" to 1024x768, click "OK". Reconnect the NVR to the first monitor and see if the screen appears.

⚠ Note:




If you are using an HDMI cable to connect to an HDTV, set the TV to HDMI mode. If you are using a VGA cable to connect to the HDTV, set the TV to VGA mode.

★ If the above method does not help.

Customer Service: Please contact us at [info@oossxx.com](mailto:info@oossxx.com).

## 15. Customer Service

If you have any questions, Please contact us before you return the product or if you have any questions. We will try our best to assist you.

	<a href="http://www.oossxx.com">www.oossxx.com</a>
	<a href="mailto:info@oossxx.com">info@oossxx.com</a> (Reply in 24 hours)
	Tel: +1(352)900-4656 (Eastern time Monday-Friday 9:00am-5:00pm)

**OOSXX**

## Advertisement for Optional Product Accessories Junction Box


Junction Box: waterproof, moisture-proof, sun-proof, corrosion-proof, and durable. It can be used inside and outside the house and has wide range of uses. Cable entry through rear/bottom. Ideal for hiding wires and connectors. It not only looks good, but also delays the aging of the wires and prolongs the service life of the camera. Choosing a cable box is a wise choice to make the security camera better at protecting your house. You can buy the Junction Box through [www.oossxx.com](http://www.oossxx.com). This will bring you more functional experience.

You can place your order through [amazon.com](http://amazon.com) or [Walmart.com](http://Walmart.com).

After-sales service team



Interior photos



Installation Process

**OOSXX**



Advertisement for Optional Product Accessories  
Solar Power Deck LED Light Clip-On Yard Security Sign Spotlight



OOSXX

Universal Security Camera Sun Rain Cover Shield, Protective  
Roof for Dome/Bullet Outdoor Camera



**Protect your camera**

The universal security camera shade cover can minimize camera to weather factors, capable of shielding rain, sunshine, dust, sand and snow. It keeps the camera dry and clean as well as greatly extended the camera life



**Super Compatibility**

The sun rain shade cover is compatible with Nest/ Ring/Arlo/Dome/Bullet Cameras and and most other brands of indoor or outdoor cameras

**High Quality and Easy to Install**

The cover shade is made of ABS material, which is durable, reliable and lightweight. What's more, it is very easy to install even for beginners.



**Suitable Size**

Size is suitable for different camera mounts. It perfectly protects the camera without blocking the line of sight and night vision.



OOSXX




## Universal Security Camera Sun Rain Cover Shield, Protective Roof for Dome/Bullet Outdoor Camera



### Protect your camera

The universal security camera shade cover can minimize camera to weather factors, capable of shielding rain, sunshine, dust, sand and snow. It keeps the camera dry and clean as well as greatly extended the camera life



### Super Compatibility

The sun rain shade cover is compatible with Nest /Ring/Arlo/Dome/Bullet Cameras and most other brands of indoor or outdoor cameras



### High Quality and Easy to Install

The cover shade is made of ABS material, which is durable, reliable and lightweight. What's more, it is very easy to install even for beginners.

### Suitable Size

10.63" X 5.51" (27cm X 14cm). This size is suitable for different camera mounts. It perfectly protects the camera without blocking the line of sight and night vision.



OOSXX

## 3MP HD Hidden Camera Clock Alarm

Mini Spy Camera Wireless with Remote Live View, Motion Detection Alarm Alert Night Vision Indoor WiFi Nanny Cam, Surveillance Small Cameras for Home Security



### DEEP HIDDEN CAMERA

Mini camera is inconspicuous, invisible to naked eyes and can be placed anywhere to safeguard and monitor your property, baby, nanny or pets.

### ANTI-NOISE 2-WAY AUDIO

The surveillance camera is built with advanced noise filter microphone & speaker. The anti-noise technology is adopted for fluent & clear voice communications between APP and cameras. Wherever you are, you can share joy with your kids or interacting with your pet. With its help, you can even get rid of the unwelcoming guests.

### REAL 3MP HD LIVE STREAM

Stunning 3MP HD resolution with crystal clear video, the surveillance camera can capture every detail, provide a wide scene which is sure to impress you.

### CLEAR SIREN


Through the high quality built-in speaker, this nanny cam is also useful to deter burglars and warn your families with its loud siren.

### AUTO NIGHT VISION & REAL-TIME ALERT

Security spy camera with invisible infrared lights will turn on automatically in low light, and motion detection system can issue alarm and send alert messages once triggered, it is designed to protect you and your family 24/7.

### OUTSTANDING MULTI-FUNCTION CLOCK

The secret clock camera supports Micro SD card for loop recording and easy video playback. You can see time, room temperature, set for alarms. WEILAILIFE clock spy camera will provide you great help in all aspects. made product Supports local after-sales service.



OOSXX

## Active Two-Year Warranty

Please register your purchase, activate your membership  
& free two-year warranty

Thanks Purchase OOSXX Security Product. 

Just send your order ID and E-mail to [info@oosxx.com](mailto:info@oosxx.com),  
We will activate your membership & extends free Warranty  
from 1-year to 2-years.

The "Activate 2-years warranty receipt" will send to your  
E-Mail in 48 hours.

your purchase will 100% covered under 2 years warranty.  
Enjoy

What is Amazon order ID?

It's a 17-digit code that will be in this format:  
123-4567890-1234567

What is Walmart order ID?

It's a 13-digit code that will be in this format:  
1234567890123

Wish you have lovely day

Thanks  
[info@oosxx.com](mailto:info@oosxx.com)  
[www.oosxx.com](http://www.oosxx.com)  
OOSXX Customer Care

**OOSXX**