


Champion Power Equipment, Inc., Santa Fe Springs, CA USA

MODEL #201078

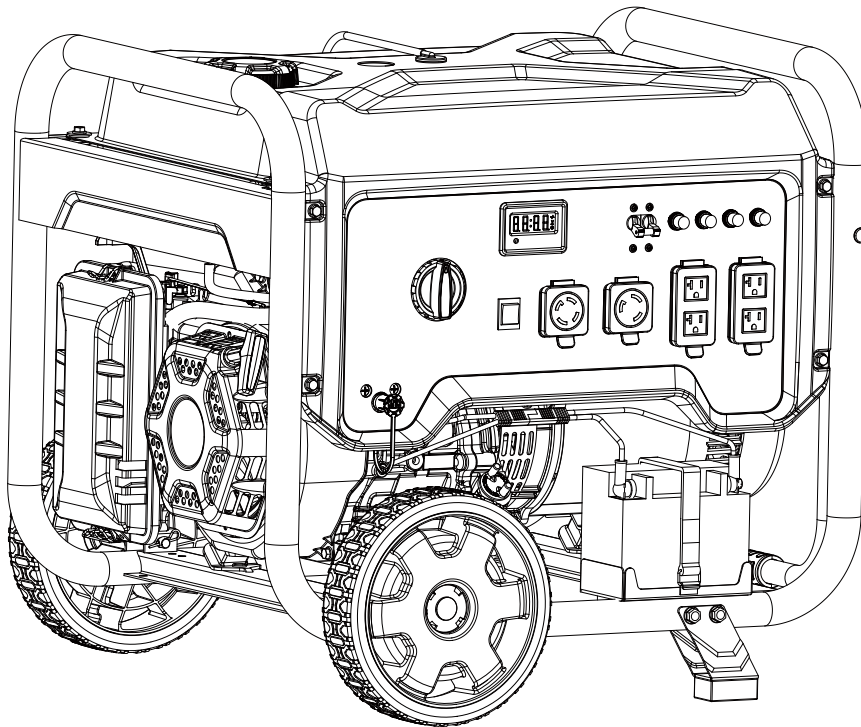

PARTS INFORMATION

8000W ELECTRIC START DUAL FUEL GENERATOR

SERIAL NUMBER RANGE: ALL



To order replacement parts please visit:
shop.championpowerequipment.com
or call **1-877-338-0999**.

TABLE OF CONTENTS

Generator Parts Diagram..... 3

Generator Parts List 4

Engine Parts Diagram 5

Engine Parts Part List 6

Cylinder Part Diagram..... 8

Cylinder Part List 9

Alternator Diagram 10

Alternator Part List 11

Fuel Tank Part Diagram 12

Fuel Tank Part List..... 13

Control Panel Part Diagram..... 14


Control Panel Part List 15

Frame Assembly Part Diagram 16

Frame Assembly Part List..... 17

Wiring Diagram 18

GENERATOR PARTS DIAGRAM

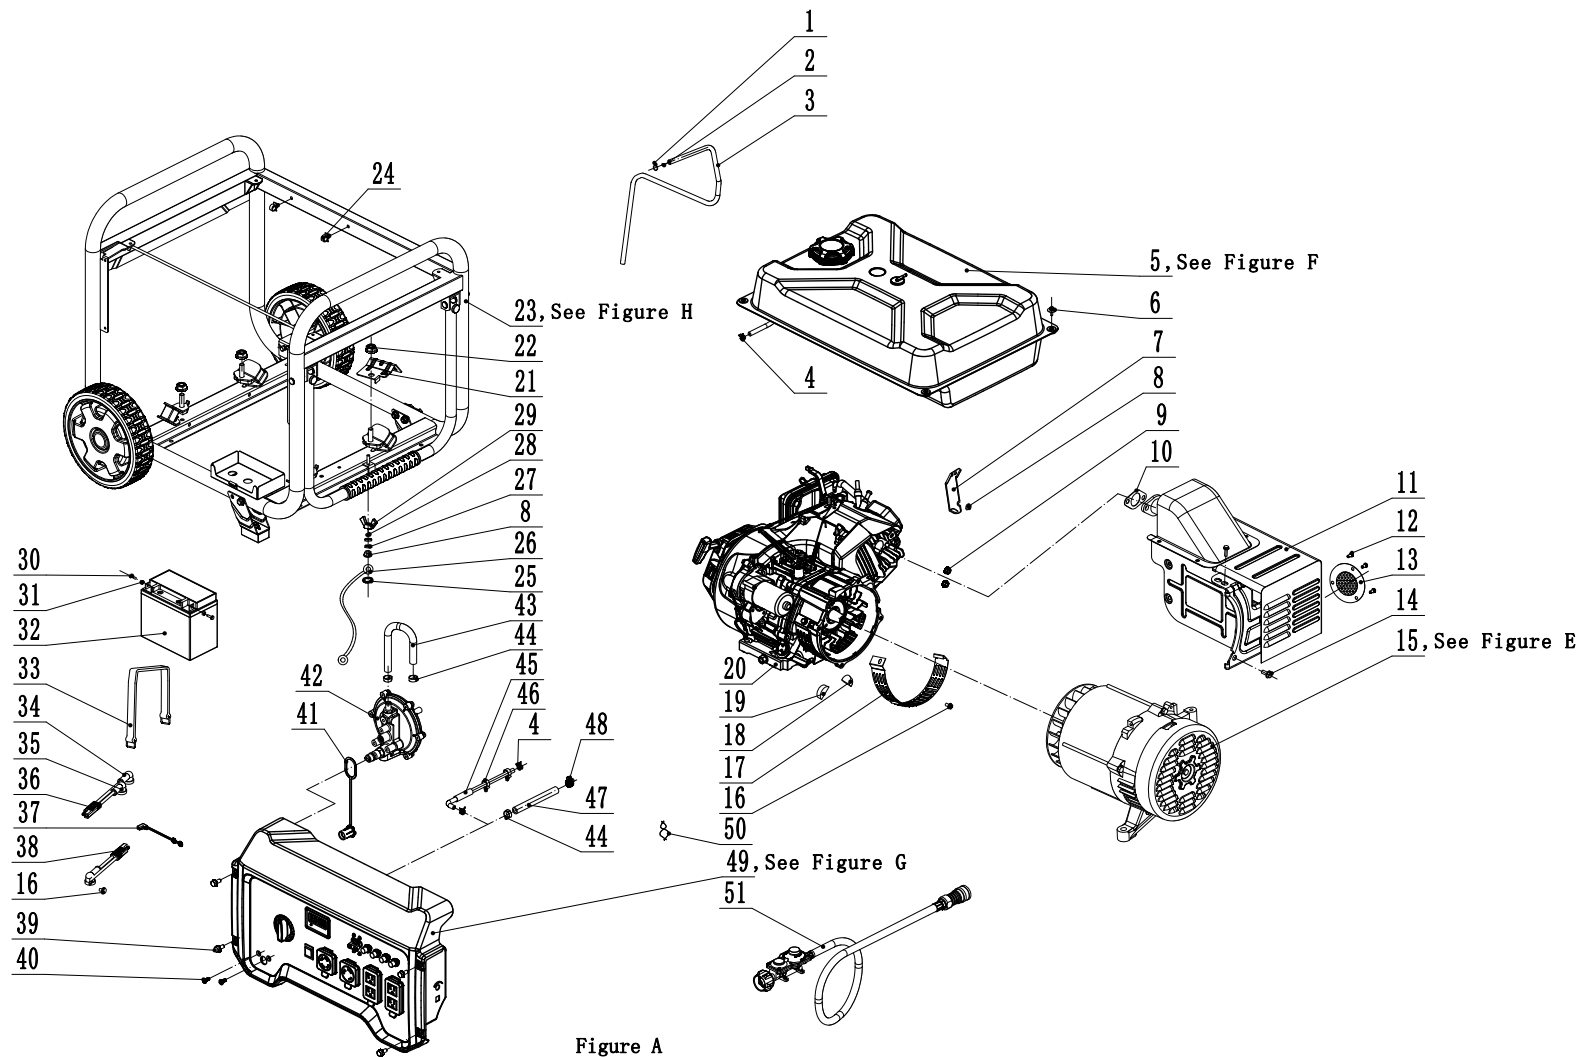

GENERATOR PARTS LIST

#	Part Number	Description	Qty.
1	2.06.006	Clamp, Ø7 x Ø1	1
2	24.070030.00	Orifice, Breather Tube	1
3	152.070014.08	Tube, Fuel Tank Breather	1
4	2.06.016	Clamp Ø8.7 x b8	3
5	152.070000.64.48	Fuel Tank Assembly, See Figure F	1
6	2.08.143.1	Flange Bolt/Washer Assembly M6 x 20, Black	4
7	45.090006.20	Bracket, Air Cleaner Support	1
8	1.6177.1.06	Lock Nut M6, Flange	2
9	1.6177.1.08	Lock Nut M8, Flange	2
10	46.100001.07	Gasket, Exhaust	1
11	46.101000.01.2	Muffler Assembly	1
12	1.9074.4.0510	Screw/Washer Assembly M5 x 10	3
13	46.101300.00	Spark Arrester	1
14	1.16674.0820.1	Flange Bolt M8 x 20, Black	2
15	154.190000.13	Alternator Assembly, See Figure E	1
16	1.5789.0608	Flange Bolt M6 x 8	2
17	152.192300.01	Vent, Alternator Fan	1
18	152.190005.00	Rubber, Fore-Cover, A	1
19	152.190005.01	Rubber, Fore-Cover, B	1
20	48.606	Engine, 459cc	1
21	152.100007.00	Heat Shield, Motor Mount	1
22	1.6177.1.10	Lock Nut M10, Flange	4
23	65312.201078	Frame Assembly, See Figure H	1
24	2.05.001	Clamp, Ø8 x 6.5	2
25	1.862.06	Lock Washer Ø6, Toothed	1
26	5.1900.029	Grounding Line 150 mm	1
27	1.97.1.06.2	Washer Ø6	2
28	1.93.06	Lock Washer Ø6	1
29	1.62.06	Butterfly Type Nut M6	1
30	1.9074.3.0510	Screw/Washer Assembly M5 x 10	2

#	Part Number	Description	Qty.
31	1.6177.1.05	Lock Nut M5, Flange	2
32	9.1000.140	Battery 12V14AH	1
33	152.200904.00	Strap, Battery	1
34	152.200013.02	Jacket, Wire, Black	1
35	152.200013.02.3	Jacket, Wire, Red	2
36	5.1900.126	Wire Harness, SAE Battery	1
37	152.200013.03	Sleeve, Connector	1
38	5.1900.125	Wire Harness, SAE Motor	1
39	1.5789.0615.1	Flange Bolt M6 x 15, Black	4
40	9.1500.005	Sleeve, Connector	1
41	1.818.0614.1	Bolt M6 x 14, Black	2
42	47.136000.05	Pressure-Reducing Valve	1
43	152.070012.13	Hose, LPG, Pressure-Reducing to Fuel Valve, 200 mm	1
44	2.06.032	Clip Ø17	3
45	152.070011.27	Tube, Fuel, Fuel Valve to Carburetor, 430+25mm	1
46	2.05.009	Clamp Ø12.5 x 7	2
47	152.070012.22	Hose, LPG, Fuel Valve to Carburetor, 420 mm	1
48	2.06.023	Clip Ø20	1
49	201078.21	Control Panel Assembly, See Figure G	1
50	2.06.050	Clamp, Ø8 x Ø18	1
51	152.070012.21	LPG Hose With Regulator 3.3 ft.	1

ENGINE PARTS DIAGRAM

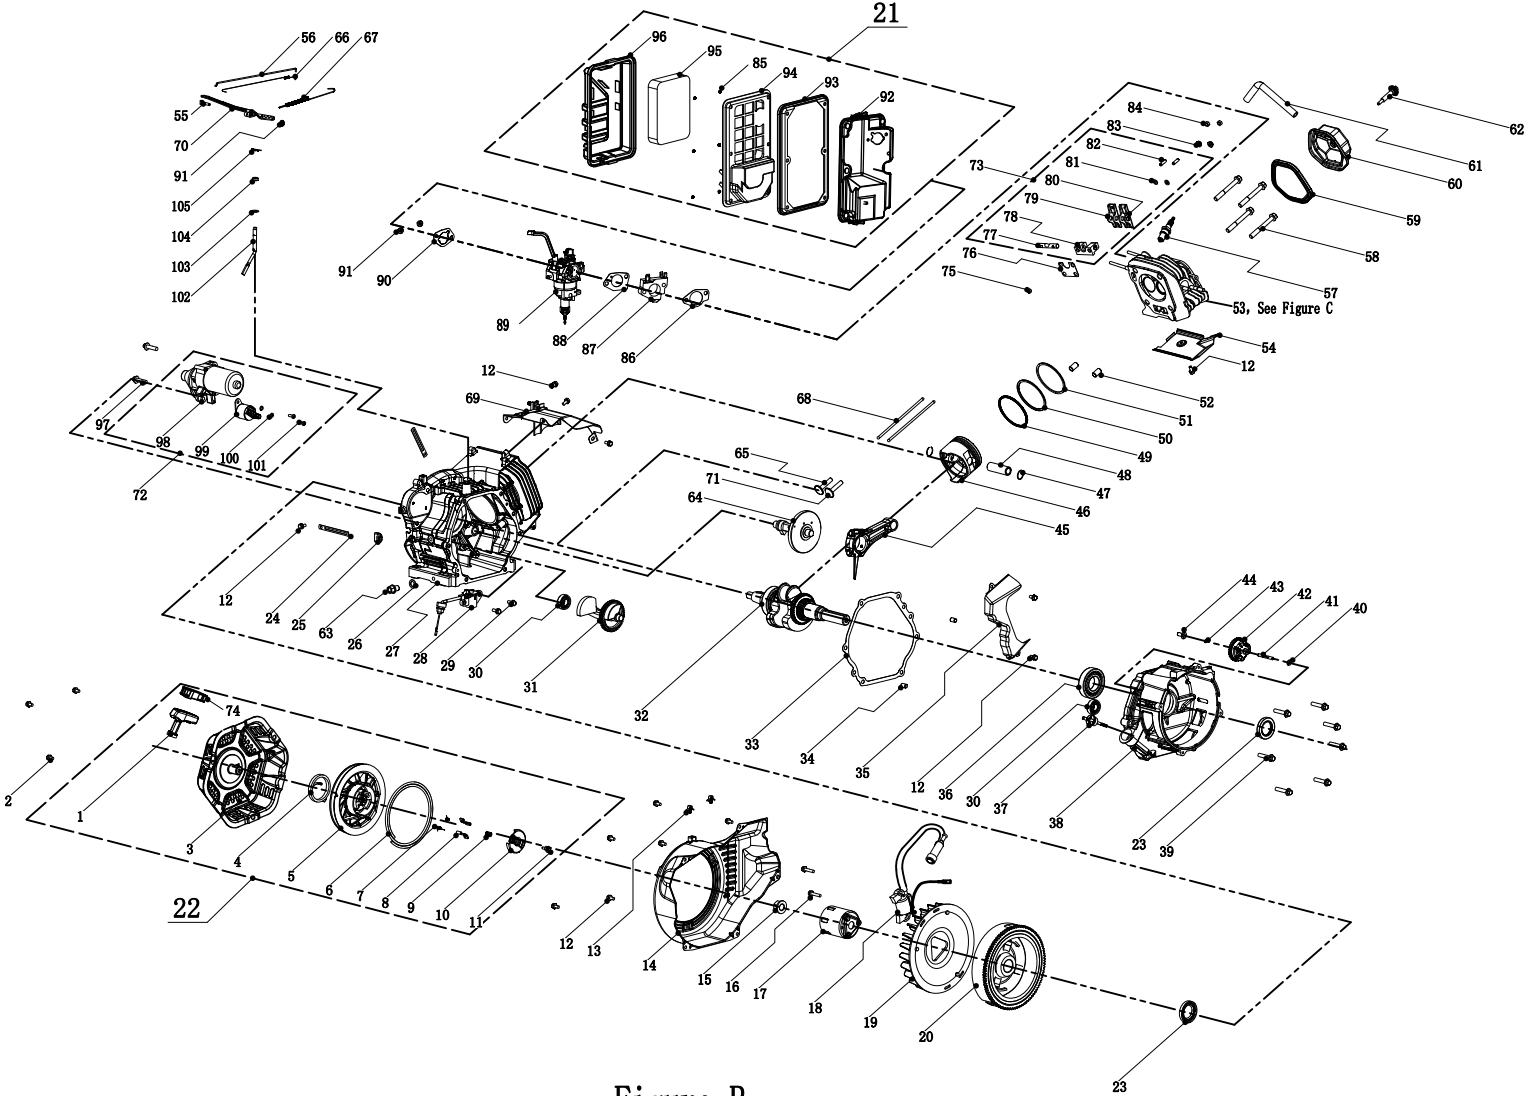


Figure B

ENGINE PARTS PART LIST

#	Part Number	Description	Qty.
1	21.061006.02	Handle, Recoil, Soft	1
2	1.16674.0608	Flange Bolt M6 x 8	3
3	46.061100.03.2	Cover, Recoil Starter, Black	1
4	45.060005.00	Spring, Recoil Starter	1
5	45.061102.00	Reel, Recoil Starter	1
6	2.10.003.1	Rope Ø4 x 1550, Black	1
7	45.060003.00	Spring, Ratchet	2
8	45.060002.00	Starter Ratchet, Steel	2
9	45.060009.00	Spring, Ratchet Guide	1
10	45.060007.00	Ratchet Guide	1
11	45.060008.00	Screw, Ratchet Guide	1
12	1.5789.0612	Flange Bolt M6 x 12	12
13	2.05.009	Clamp Ø12.5 x 7	2
14	47.080100.01.48	Fan Cover, Yellow	1
15	2.02.007	Nut M16 x 1.5	1
16	1.5789.0629	Flange Bolt M6 x 29	2
17	45.060001.00	Pulley, Starter	1
18	46.123000.08	Ignition Coil	1
19	48.080001.00	Fan, Engine	1
20	46.120100.05	Flywheel	1
21	46.091000.09	Air Cleaner Assembly, Black	1
22	46.061000.03	Recoil Assembly	1
23	2.11.007	Oil Seal Ø35 x Ø52 x 8	2
24	2.05.050	Wire Clip 100 mm	2
25	152.070031.01	Sheath, Wire	1
26	2.03.023	Washer Ø12.5 x Ø20 x 2 , Drain Bolt	1
27	48.030100.00	Crankcase	1
28	45.127000.02	Oil Level Sensor	1
29	1.5789.0615	Flange Bolt M6 x 15	2
30	1.276.6202	Bearing 6202	2

#	Part Number	Description	Qty.
31	48.050006.00	Weight Balancer	1
32	47.050100.01	Crankshaft Assembly	1
33	46.030008.00	Gasket, Crankcase Cover	1
34	2.04.001	Dowel Pin Ø9 x 14	2
35	46.080600.00	Air Guide, Right Side	1
36	1.276.6207	Bearing 6207	1
37	46.031000.01.48	Oil Dipstick, Yellow	1
38	45.030007.00	Cover, Crankcase	1
39	1.5789.0840	Flange Bolt M8 x 40	7
40	2.03.021.1	Washer Ø6.4 x Ø13 x 1, Black	1
41	45.110013.00	Shaft, Governor Gear	1
42	45.110100.00	Gear, Governor	1
43	21.110011.00	Clip, Governor Gear	1
44	45.110012.00	Bushing, Governor Gear, Steel	1
45	47.050200.00	Connecting Rod Assembly	1
46	48.050005.00	Piston	1
47	2.09.004	Circlip Ø21 x Ø1	2
48	45.050003.00	Pin, Piston	1
49	48.050303.00	Ring, Oil	1
50	48.050302.00	Ring, Second Piston	1
51	48.050301.00	Ring, First Piston	1
52	2.04.004	Dowel Pin Ø12 x 20	2
53	47.010000.01	Cylinder Head Assembly, See Figure C	1
54	46.080400.00	Air Guide, Lower	1
55	2.08.040	Bolt M6 x 21, Governor Arm	1
56	45.110006.00	Rod, Governor	1
57	2.15.002(F6RTC)	Spark Plug F6RTC	1
58	2.08.122	Flange Bolt M10 x 95	4
59	46.020002.00	Gasket, Cylinder Head Cover	1
60	47.021000.00	Cover, Cylinder Head	1

#	Part Number	Description	Qty.
61	45.020001.02	Breather Tube	1
62	47.020100.00	Bolt, Cylinder Head Cover	1
63	2.08.039	Drain Bolt M12 x 1.5 x 15	1
64	48.041000.00	Camshaft	1
65	48.040013.00	Lifter, Intake Valve	1
66	45.110005.00	Spring, Throttle Return	1
67	45.110007.00	Spring, Governor	1
68	46.040005.00	Push Rod	2
69	46.080300.20	Air Guide, Upper	1
70	45.110003.01	Arm, Governor	1
71	45.040013.00	Lifter, Exhaust Valve	1
72	45.125000.03	Starter Motor Assembly	1
73	46.040200.00	Rocker Arm Assembly	1
74	21.061301.01.48	Support, Handle, Recoil	1
75	45.040008.00	Rotator, Exhaust Valve	1
76	46.040004.00	Guide Plate, Push Rod	1
77	46.040016.00	Shaft, Rocker Arm	1
78	46.040201.00	Retainer, Rocker Arm	1
79	46.040009.00	Rocker Arm, Intake Valve	1
80	46.040018.00	Rocker Arm, Exhaust Valve	1
81	1.97.1.06	Washer Ø6	2
82	22.040012.00	Screw, Valve Adjustment	2
83	1.6177.1.06	Flange Nut M6	2
84	21.040021.00	Nut M6 x 0.5, Lock	2
85	1.6177.1	Flange Nut M5	6
86	46.130002.20	Gasket, Insulator	1
87	45.130001.00	Insulator, Carburetor	1
88	46.130003.20	Gasket, Carburetor	1
89	48.131000.20	Carburetor Assembly	1
90	46.130004.20	Gasket, Air Cleaner	1
91	1.6177.06	Flange Nut M6	3
92	46.091100.09	Base, Air Cleaner	1

#	Part Number	Description	Qty.
93	45.091002.20	Seal, Air Cleaner	1
94	45.091001.20	Separator, Air Cleaner	1
95	45.091003.20	Element, Air Cleaner	1
96	46.091200.09	Cover, Air Cleaner	1
97	1.5789.0835	Flange Bolt M8 x 35	2
98	45.125100.00	Starter Motor	1
99	45.125200.03	Relay, Starter	1
100	1.93.05	Lock Washer Ø5	2
101	1.16674.0516	Flange Bolt M5 x 16	2
102	45.110001.00	Shaft, Governor Arm	1
103	2.03.019	Washer Ø8.2 x Ø17 x 0.8	1
104	2.11.006	Oil Seal Ø7 x Ø14 x 5	1
105	45.110008.00	Pin, Shaft	1

CYLINDER PART DIAGRAM

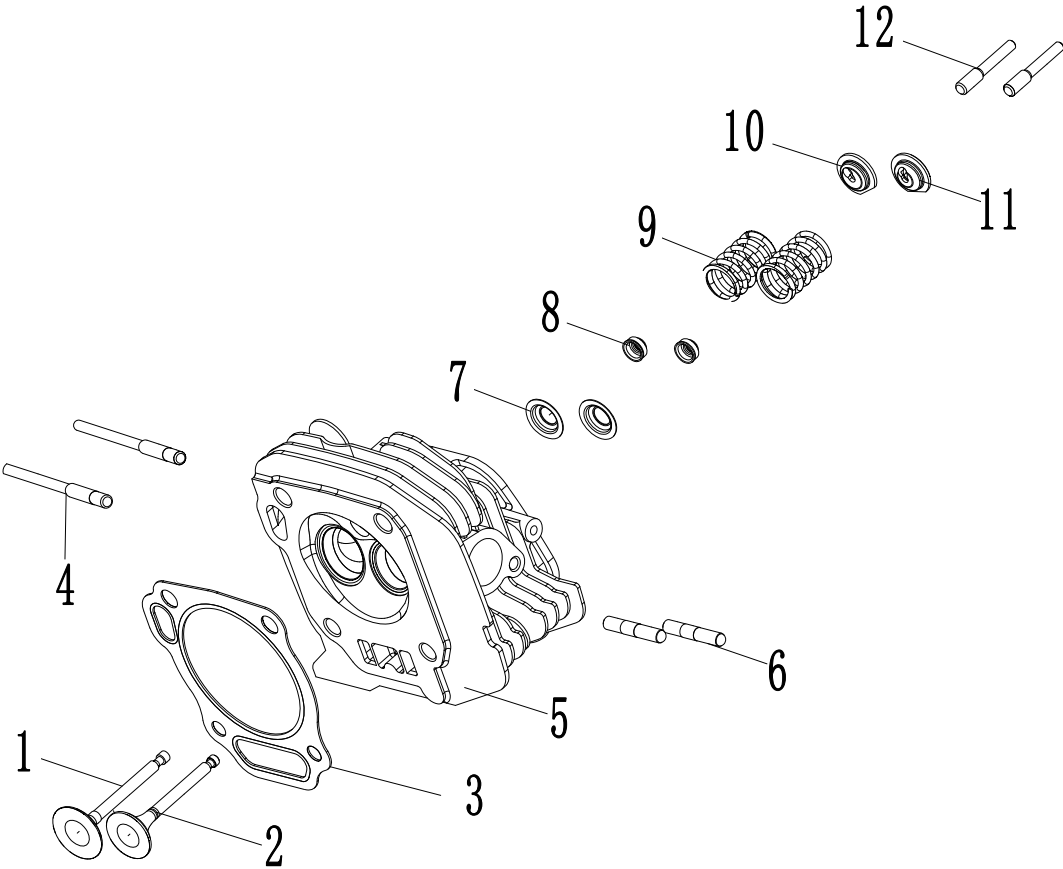


Figure C

CYLINDER PART LIST

#	Part Number	Description	Qty.
1	47.040002.00	Intake Valve	1
2	47.040006.00	Exhaust Valve	1
3	48.030009.00	Gasket, Cylinder Head	1
4	2.01.008	Stud Bolt M6 x M8 x 105	2
5	47.010100.01	Cylinder Head	1
6	2.01.010	Stud Bolt M8 x 35	2
7	45.040015.00	Retainer, Valve Spring	2
8	45.040017.00	Oil Seal, Valve	2
9	45.040003.00	Spring, Valve	2
10	45.040001.00	Retainer, Intake Valve Spring	1
11	45.040007.00	Retainer, Exhaust Valve Spring	1
12	23.040010.00	Bolt, Rocker Arm	2

ALTERNATOR DIAGRAM

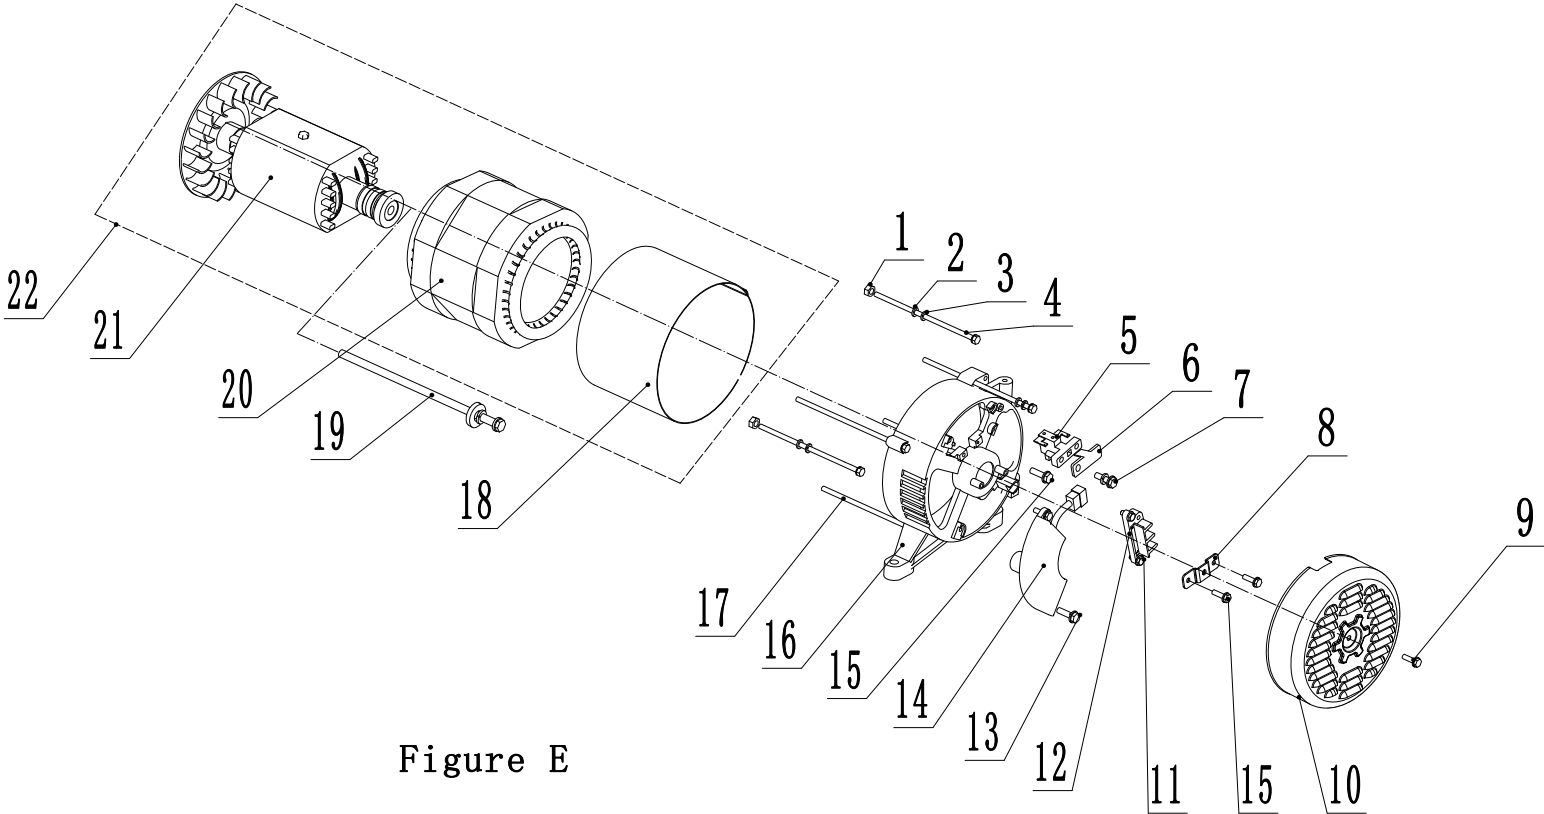


Figure E

ALTERNATOR PART LIST

#	Part Number	Description	Qty.
1	1.6175.05	Nut M5	2
2	1.971.05	Washer Ø5	2
3	1.93.05	Lock Washer Ø5	2
4	2.08.071	Bolt M5 x 229	2
5	152.190300.00	Carbon Bursh Assembly	1
6	122.190004.01	Bracket, Carbon Brush Securing	1
7	1.9074.15.0520	Bolt/Washer Assembly M5 x 20	1
8	122.190018.03	Bracket, Generator End Cover	1
9	2.08.068.1	Flange Bolt M5 x 13, Black	1
10	152.190003.02.48	Cover, End Housing, Yellow	1
11	1.9074.17.0516	Screw/Washer Assembly M5 x 16	2
12	122.190400.02	Terminal Block	1
13	1.16674.0516	Flange Bolt M5 x 16	2
14	153.190200.03	AVR	1
15	1.16674.0512	Flange Bolt M5 x 12	3
16	152.190002.00	End Housing	1
17	2.08.069	Flange Bolt/Washer Assembly M6 x 194	4
18	153.191002.00	Stator Cover	1
19	2.08.070	Flange Bolt/Washer Assembly M10 x 280	1
20	154.191200.13	Stator Assembly, AI, Ø190 x 148 mm, DC 12V	1
21	153.191100.18	Rotor Assembly, AI, Ø190x 158 mm, DC 12V	1
22	154.191000.13	Alternator Assembly, AI, Ø190 x 158 mm, DC 12V	1

FUEL TANK PART DIAGRAM

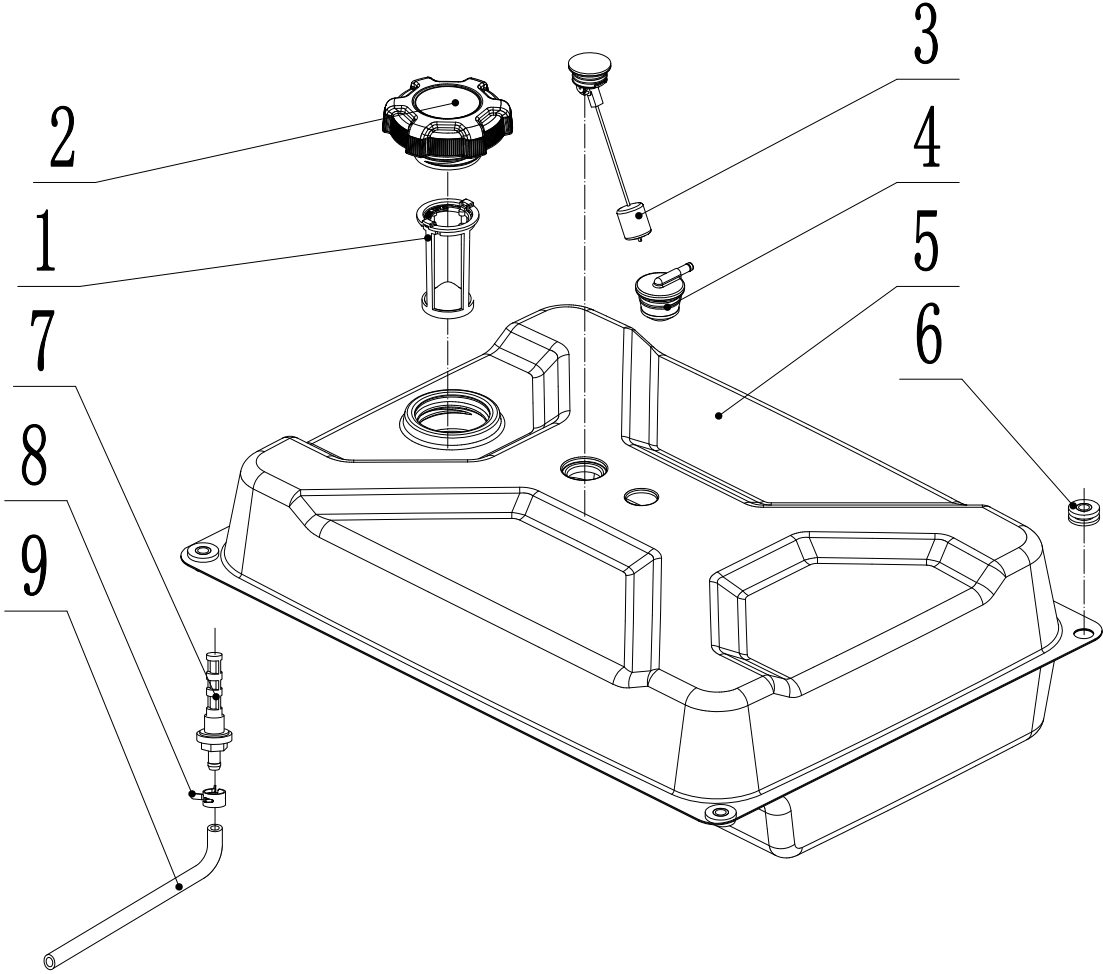


Figure F

FUEL TANK PART LIST

#	Part Number	Description	Qty.
1	122.070300.03	Fuel Filter	1
2	122.070100.09	Fuel Tank Cap	1
3	152.072000.06	Fuel Gauge Assembly	1
4	24.070800.00	Reversal Valve	1
5	152.071000.64.48	Fuel Tank, 29.1L, Yellow	1
6	122.070015.01	Mount Vibration, Fuel Tank	4
7	21.070600.03	Fitting, Fuel Tank	1
8	2.06.016	Clamp Ø8.7 x b8	1
9	152.070011.28	Tube, Fuel, 270+25 mm, Fuel Tank to Fuel Valve	1

CONTROL PANEL PART DIAGRAM

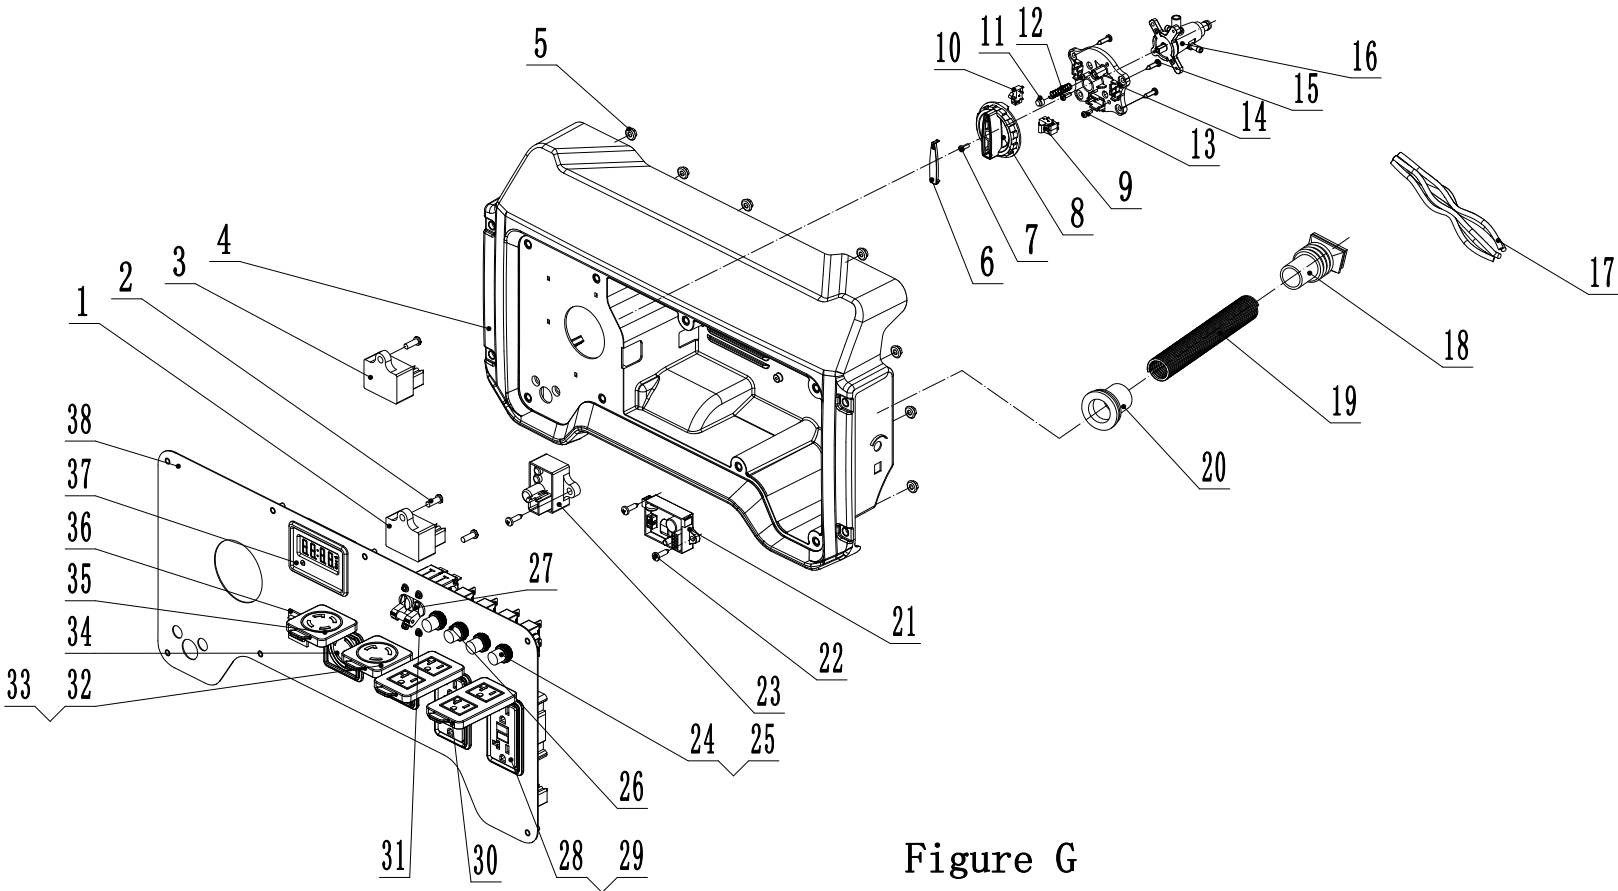


Figure G

CONTROL PANEL PART LIST

#	Part Number	Description	Qty.
1	5.1810.004	VFO Diode	1
2	1.818.0514.2	Screw M5 x 14	3
3	5.1800.006	Rectifier	1
4	152.210002.63	Control Panel Housing	1
5	1.6177.1.05	Lock Nut M5, Flange	8
6	62.139002.00.48	Cover, Fuel Select Dial, Yellow	1
7	1.9074.4.0414.1	Screw/Washer Assembly M4 x 14, Black	1
8	122.139001.02	Fuel Select Dial	1
9	5.1050.006	Microswitch, 2-Pole	1
10	5.1050.005	Microswitch	1
11	1.308.7	Ball Bearing, Ø7	1
12	62.139007.00	Spring, Steel Ball	1
13	1.818.0414	Screw M4 x 14	3
14	122.139004.02	Mounting Plate, Fuel Valve	1
15	1.845.4816	Screw, ST4.8 x 16	4
16	122.070400.09	Fuel Valve	1
17	201078.21.10	Wire Harness	1
18	152.210003.03	Plug, End Housing	1
19	5.1320.024	Sheath, Wire	1
20	152.210003.01	Wire Jacket, Control Panel Housing	1
21	5.1830.022	Module, CO Shutdown	1
22	1.845.4213	Screw, ST4.2 x 13	3
23	5.1820.009	Charger Module	1
24	5.1210.920	20Amp Circuit Breaker, Push Button, CSA	2
25	5.1870.014	Circuit Breaker Cover, Push Button	4
26	5.1210.930	30Amp Circuit Breaker, Push Button, CSA	2
27	5.1240.330	33Amp Circuit Breaker, Double Pole	1
28	5.1120.050	Receptacle 5-20R, Duplex GFCI	2
29	1.6177.1.04.1	Lock Nut M4, Flange, Black	8

#	Part Number	Description	Qty.
30	5.1870.022	Receptacle Cover, Receptacle 5-20R, Duplex GFCI	2
31	1.9074.4.0306.1	Screw/Washer Assembly M3 x 6, Black	4
32	5.1120.023	Receptacle L5-30R, CSA	1
33	5.1870.023	Receptacle Cover, Receptacle L5-30R	1
34	5.1120.026	Receptacle L14-30R, CSA	1
35	5.1870.020	Receptacle Cover, Receptacle L14-30R	1
36	5.1000.005.3	Ignition Switch, Red	1
37	5.1470.000	Intelligauge, INT1AOF	1
38	152.259.8.2	Control Panel	1

FRAME ASSEMBLY PART DIAGRAM

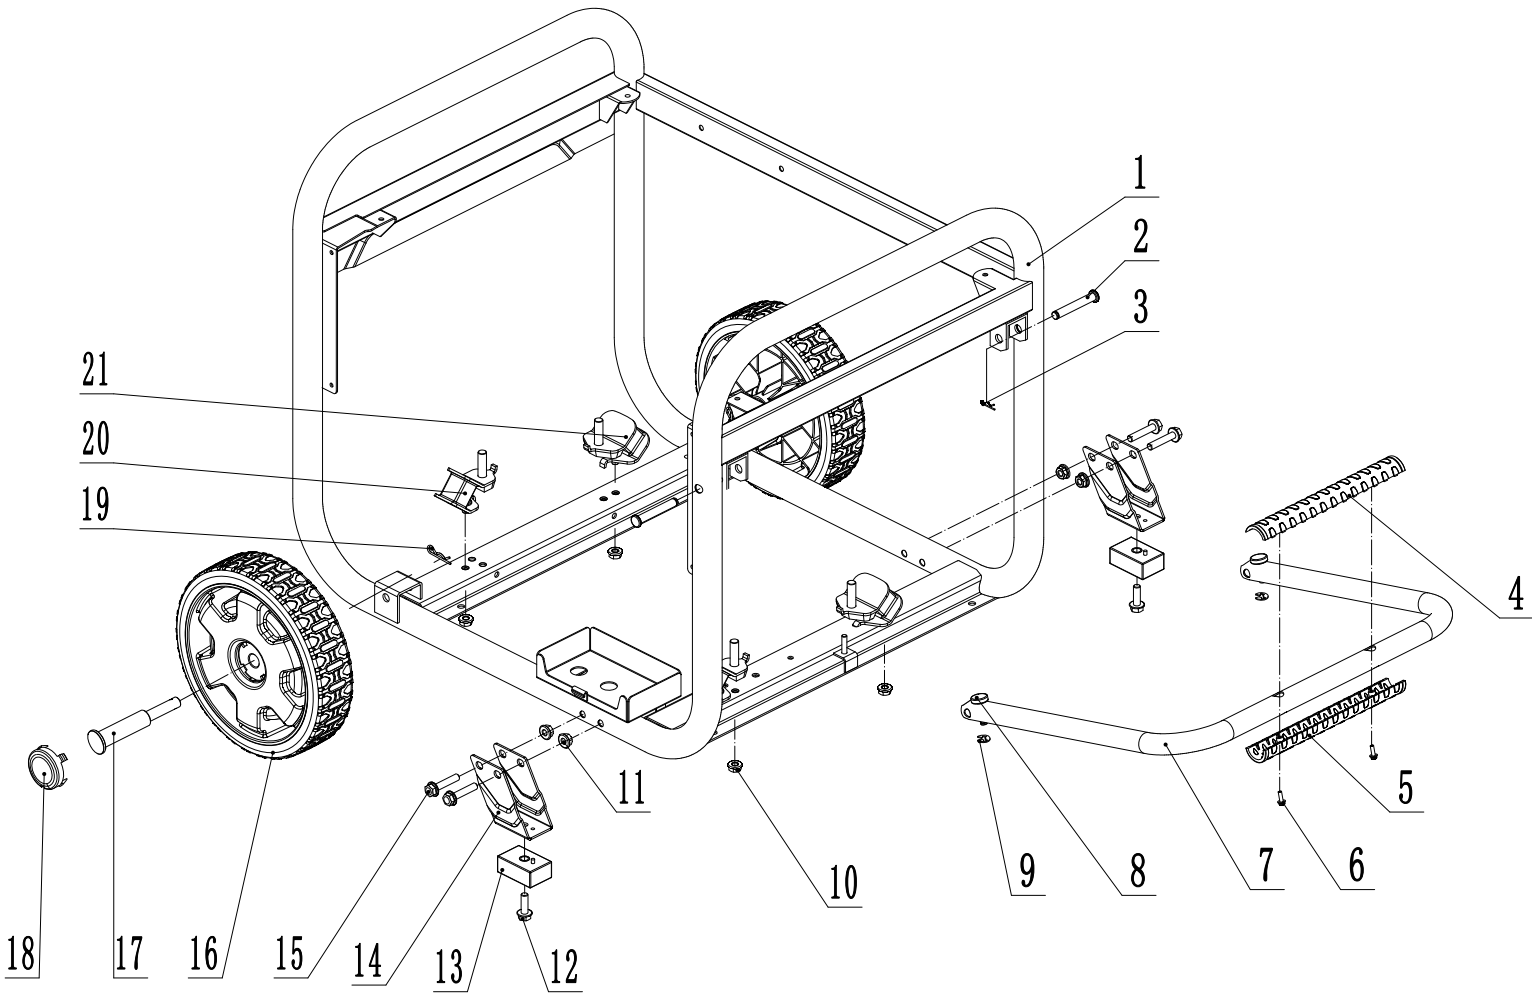


Figure H

FRAME ASSEMBLY PART LIST

#	Part Number	Description	Qty.
1	65312.0.10.2	Frame, 700 x 576 x 585	1
2	152.200703.03	Long Pin, Handle	2
3	11.110008.00	Pin Ø1.6 x 24, "R" Shape , Black	2
4	122.200702.14.48	Cover, Handle, Lower, Yellow	1
5	122.200702.13.48	Cover, Handle, Upper, Yellow	1
6	1.9074.4.0414.1	Screw/Washer Assembly M4 x 14, Black	2
7	152.200701.22.2	Handle, U Shape, Black	1
8	152.200703.02	Short Pin, Handle	2
9	1.894.1.08	Circlip Ø8	2
10	1.6177.1.08	Lock Nut M8, Flange	4
11	1.6177.1.08.1	Lock Nut M8, Flange , Black	6
12	1.5789.0825.1	Flange Bolt M8 x 25, Black	2
13	122.201400.04	Rubber, Support, 55 x 36 x 22	2
14	152.200002.18.2	Support Leg, 78 mm, Black	2
15	1.5789.0850.1	Flange Bolt M8 x 50, Black	4
16	152.201701.13.48	9.5 in. Wheel, PU, Yellow	2
17	122.201501.25.1	Pin Roll, Wheel, Ø16 x Ø10 x 97, Black	2
18	122.201702.11.48	Wheel Cover, Tooth Profile 8-10 in, Yellow	2
19	2.16.001.1	Pin Ø2 x 33, "R" Shape , Black	2
20	152.201200.03	Motor Mount 1	2
21	152.201200.04	Motor Mount 2	2

WIRING DIAGRAM

