



[Manuals.plus](#) /

› [UNIVERSALBLUE](#) /

› UNIVERSALBLUE Inclined Glass Range Hood 90 cm User Manual

UNIVERSALBLUE 6080-UBCA2005-2

UNIVERSALBLUE Inclined Glass Range Hood 90 cm

Model: 6080-UBCA2005-2

INTRODUCTION

This manual provides essential information for the safe and efficient operation of your UNIVERSALBLUE Inclined Glass Range Hood. Please read it thoroughly before installation and use, and keep it for future reference.



Image: Front view of the UNIVERSALBLUE 90 cm Inclined Glass Range Hood in white and stainless steel.

Safety Information

Always follow basic safety precautions when using electrical appliances to reduce the risk of fire, electric shock, and injury to persons. This appliance is intended for domestic use only.

- Ensure the power supply matches the rating label on the appliance.
- Do not allow children to operate the appliance.
- Regularly clean the grease filters to prevent fire hazards.
- Ensure adequate ventilation in the room when the range hood is used simultaneously with gas or other fuel-burning appliances.
- Disconnect the appliance from the power supply before cleaning or maintenance.

SETUP AND INSTALLATION

Proper installation is crucial for the performance and safety of your range hood. It is recommended that installation be performed by a qualified technician.

Dimensions and Clearance

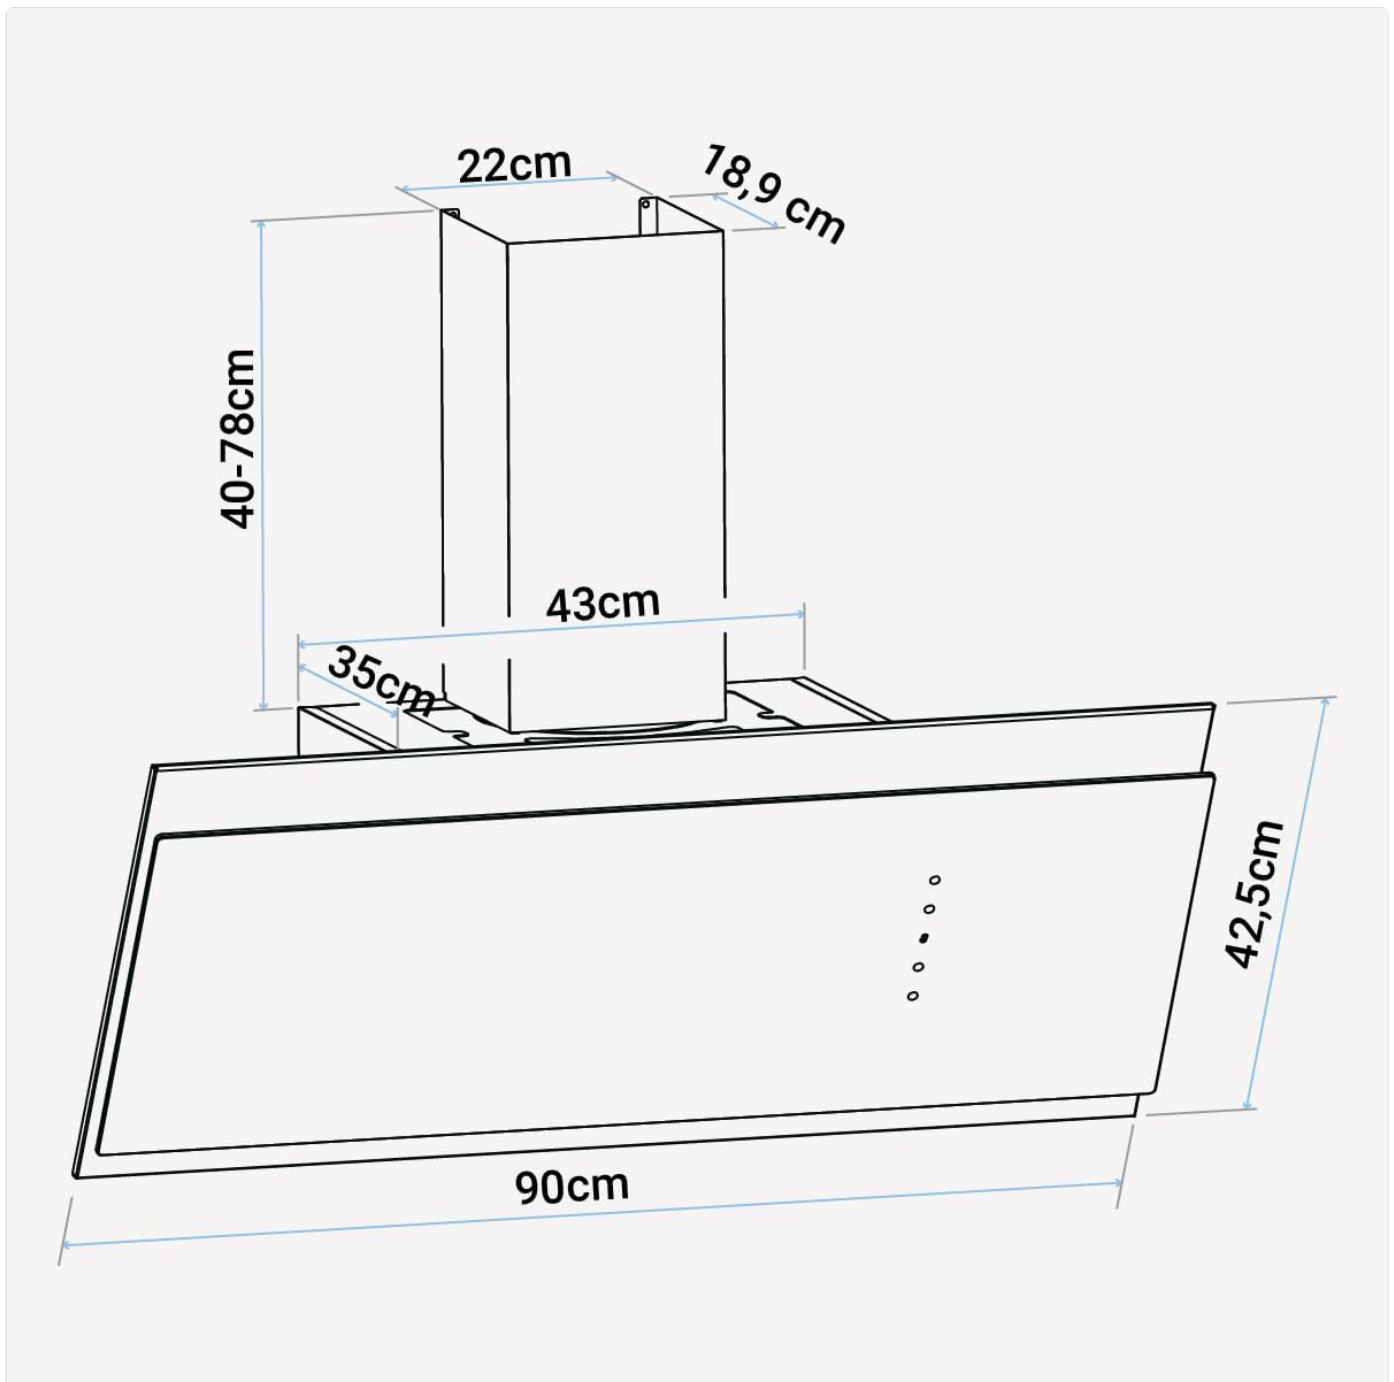


Image: Technical diagram illustrating the dimensions of the range hood, including width (90cm), height, and depth, along with chimney measurements.

Refer to the dimension diagram for precise measurements. Ensure sufficient clearance between the cooking surface and the bottom of the range hood as per local building codes and manufacturer recommendations (typically 65-75 cm for electric hobs and 75-85 cm for gas hobs).

Mounting the Hood

1. Mark the mounting points on the wall according to the provided template or measurements.
2. Drill holes and insert wall plugs suitable for your wall type.
3. Secure the mounting bracket to the wall.
4. Carefully lift the hood and hang it onto the mounting bracket.
5. Connect the exhaust ducting to the hood's outlet. Ensure the ducting is as short and straight as possible for optimal performance.
6. Install the decorative chimney sections, if applicable.

Electrical Connection

Connect the range hood to a grounded electrical outlet. Ensure the electrical installation complies with all local regulations. If in doubt, consult a qualified electrician.

OPERATING INSTRUCTIONS

Your UNIVERSALBLUE range hood features intuitive touch controls for easy operation.



Image: Detailed view of the touch-sensitive control panel, showing icons for power, speed settings, and light.

Control Panel Functions

Icon	Function	Description
	Power On/Off	Press to turn the hood on or off.
↑↑↑	Speed Selection	Cycle through 3 fan speeds (Low, Medium, High) to adjust suction power.

Icon	Function	Description
------	----------	-------------

	Light Control	Press to turn the LED light on or off.
	Timer Function	Activate the timer for automatic shutdown after 9 to 15 minutes.

For optimal performance, select a fan speed appropriate for the amount of steam and odors generated during cooking. Use higher speeds for frying or grilling, and lower speeds for simmering.

MAINTENANCE AND CLEANING

Regular maintenance ensures the longevity and efficiency of your range hood.

Cleaning the Exterior

Wipe the exterior surfaces with a soft cloth dampened with mild detergent. Do not use abrasive cleaners or corrosive detergents, as they can damage the stainless steel and glass finishes.

Cleaning/Replacing Grease Filters

The aluminum grease filters should be cleaned regularly (approximately every 2-4 weeks, depending on usage) to maintain optimal suction power and prevent grease buildup.



Image: A hand demonstrating how to open the inclined glass panel to reveal the aluminum grease filters inside the hood.

1. Ensure the hood is turned off and disconnected from the power supply.
2. Open the inclined glass panel to access the filters.
3. Release the filter clips and carefully remove the aluminum filters.
4. Clean the filters by hand with warm soapy water or in a dishwasher.
5. Allow the filters to dry completely before re-installing them.
6. Replace the filters by aligning them with the slots and securing the clips.

Replacement filters are available from UNIVERSALBLUE authorized dealers.

Replacing the LED Light

The hood is equipped with a 2W LED light. If replacement is needed, contact UNIVERSALBLUE customer support or a qualified technician.

TROUBLESHOOTING

Before contacting customer service, please check the following common issues and solutions:

Problem	Possible Cause	Solution
Hood does not turn on.	No power supply.	Check if the power cord is properly plugged in and the circuit breaker is not tripped.
Low suction power.	Clogged grease filters.	Clean or replace the aluminum grease filters.
Low suction power.	Ducting obstruction or improper installation.	Check ducting for blockages or kinks. Ensure ducting is correctly sized and installed.
Excessive noise.	Loose components or improper installation.	Check that all mounting screws are tightened and the ducting is securely connected.
Light not working.	Faulty LED light.	Contact customer support for light replacement.

SPECIFICATIONS

Technical details for the UNIVERSALBLUE Inclined Glass Range Hood (Model: 6080-UBCA2005-2).

Model Number: 6080-UBCA2005-2

Type: Inclined Decorative Range Hood

Color: White

Finish Type: Stainless Steel, Glass

Width: 90 cm

Suction Power: 700 m³/h

Power: 230 Watts

Voltage: 230 Volts

Noise Level: 66 dB

Speeds: 3

Lighting: 1 x 2W LED Lamp

Filter Type: Aluminum (removable and dishwasher safe)

Timer: 9-15 minutes auto-off

Energy Efficiency Class: A

Item Weight: 14.08 Kilograms

Package Dimensions: 95.5 x 55.5 x 42.5 cm

WARRANTY AND SUPPORT

UNIVERSALBLUE products are designed for durability and performance. For warranty information, technical support, or spare parts, please refer to the warranty card included with your product or visit the official UNIVERSALBLUE website.

Contact Information:

Brand: UNIVERSALBLUE

Website: www.universalblue.es (Please check for regional support contacts)

Model: 6080-UBCA2005-2

When contacting support, please have your model number and purchase date ready.

© 2024 UNIVERSALBLUE. All rights reserved.