

尺寸:140x100mm


AJAZZ × NACODEX

AK992有线机械键盘
WIRED MECHANICAL KEYBOARD

使用说明书
User Manual

非常感谢您选购了我们AJAZZ黑爵AK992,这款产品具备各种酷炫功能与灯效,希望您能带给您全新的操作感受。更多操作可前往黑爵官网下载驱动,AJAZZ官网网址:http://www.a-jazz.com/

一、基本参数
 产品品牌: AJAZZ
 产品型号: AK992
 传输方式: USB有线
 接口类型: 键线分离式Type-C接口
 产品尺寸: 391x142x40mm
 产品重量: ≈800g
 产品结构: Gasket结构
 外壳材质: ABS注塑
 键帽材质: ABS材质+8颗PBT键帽
 线材长度: 1.6M
 灯光效果: 单光, 20种灯效
 按键布局: 99键+1金属旋钮
 矩阵: 全键无冲
 支持系统: Windows Vista / 7/8/10/11, MAC, Android

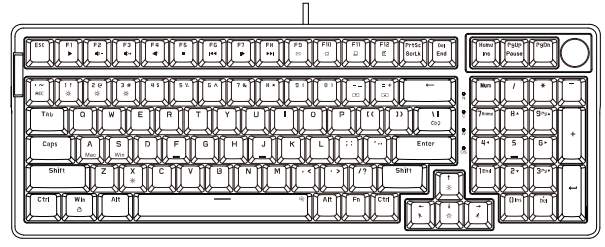

-1-

二、指示灯说明


“N” : NUM指示灯
按下Num白光熄灭表示关闭右侧数字区功能,默认白光常亮开启功能。
“C” : Caps lock指示灯
按下Caps lock开启大写白光常亮表示,关闭Caps lock白光熄灭表示。
“W” : FN+Win指示灯
按下锁Win,指示灯亮白光表示,再按解锁白光熄灭表示。
“OS” : 系统切换指示灯
FN+A切换mac系统模式白光常亮表示, FN+S切换Win系统模式白光熄灭表示。

三、旋钮功能说明

1、音量调节功能:
旋钮向右转动: 音量+
旋钮向左转动: 音量-
2、静音: 按下静音, 再按恢复
注: 音量调节默认跟随电脑, 转一格电脑音量跳2格。

四、灯光模式说明

FN+ \ : 灯效切换, 20种灯效依次循环:
随波逐流(出厂默认) / 涌泉相报 / 流星赶月 / 追风逐电 / 泛泛涟漪 / 奔逸绝尘 / 踏雪无痕 / 波光涟漪 / 厚积薄发 / 万象更新 / 龙卷风 / 循环跑马 / 星光闪烁 / 斗转参横 / 大鹏展翅 / 常亮 / 自定义 / 呼吸 / 若明若暗
FN+ ↑ : 灯光亮度+ (五档, 默认出厂最高亮度) 调至极限时整体背光闪烁3次表示
FN+ ↓ : 灯光亮度- (五档) 调至极限时整体背光关闭表示
FN+ ← : 灯效方向调节
FN+ → : 灯效方向调节

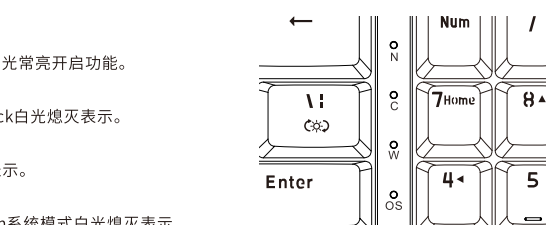

-2-

FN+ _ : 灯光速度- (五档, 出厂默认三档) 调至极限时整体背光闪烁3次表示
FN+ = : 灯光速度+ (五档) 调至极限时整体背光闪烁3次表示
FN+ X : 关闭灯光/打开灯光
FN+空格键: 长按3秒-5秒, 键盘背光闪烁3下, 恢复出厂设置

开启灯光录制
 FN+11, 2@, 3# 可自定义三组游戏灯效
 FN+11: 默认FPS模式—W/A/S/D/↑/↓/←/→
 FN+2@: 默认LOL模式—Q/W/E/R/D/G/F/B/V/L-Ctrl/L-Alt/Tab/Space/1-6/Esc
 FN+3#: 默认37键办公模式—A-Z 26个英文字母/[]/;/ ' / . / , / ; / ↑ / ↓ / ← / →
 FN+ -: 针对以上三个游戏模式灯光效果进行录制/保存灯光模式


清除灯光录制
 复位即可清除灯光录制

五、按键复合功能说明

组合键	WIN系统	MAC系统	组合键	WIN系统	MAC系统
FN+F1	媒体播放器	屏幕亮度 -	FN+F7	播放/暂停	上一曲
FN+F2	音量 -	屏幕亮度 +	FN+F8	下一曲	播放/暂停
FN+F3	音量 +	任务控制	FN+F9	邮件	下一曲
FN+F4	静音	控制台	FN+F10	浏览器	静音
FN+F5	播放器停止播放	键盘背光亮度-	FN+F11	我的电脑	音量 -
FN+F6	上一曲	键盘背光亮度+	FN+F12	计算器	音量 +
FN+ PRTSC	SCROLL		FN+DEL	END	
FN+HOME	INS		FN+PGUP	PAUSE	

-3-

五、热拔插操作示意图
 热拔插: 可替换不同轴体, 自定义你喜欢的触觉和听觉反馈, 三脚轴座兼容大部机械轴体。(图片仅供参考, 以实物为准)

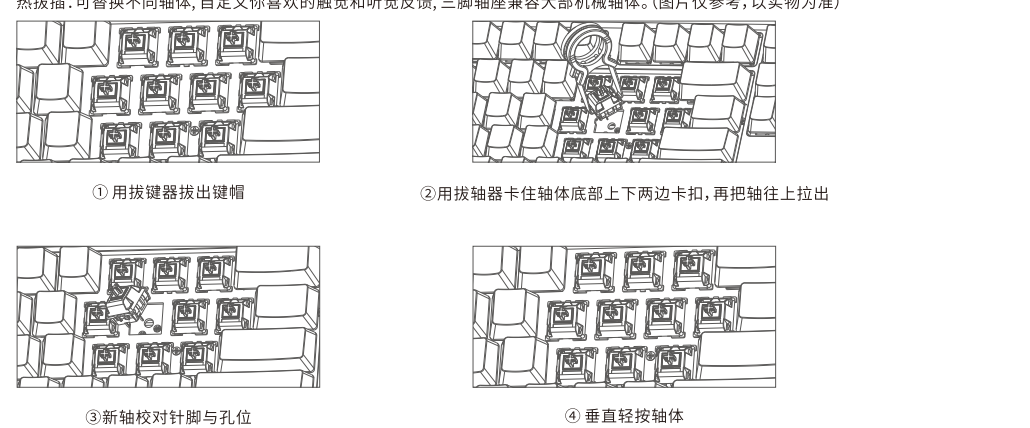


① 用拔键器拔出键帽
② 用拔轴器卡住轴体底部上下两边卡扣, 再把轴往上拉出
③ 新轴校对引脚与孔位
④ 垂直轻按轴体

-4-

Thank you very much for purchasing our AJAZZ AK992. It has various cool functions and lighting effects. I hope it can bring you a new operating experience. Driver download: http://www.a-jazz.com/

1. Product Specification
 Brand: AJAZZ
 Product Model: AK992
 Transmission Method: USB wired
 Interface Type: Type-C interface
 Product Size: 391x142x40mm
 Product Weight: About 800g
 Product Structure: Gasket
 Shell Material: ABS injection molding
 Keycap Material: ABS material + 8 PBT keycaps
 Wire Length: 1.6M
 Lighting Effect: Single light, 20 kinds of lighting effects
 Key Layout: 99 keys + 1 metal knob
 Anti-Ghosting: Full key
 Support System: Windows Vista / 7/8/10/11, MAC, Android

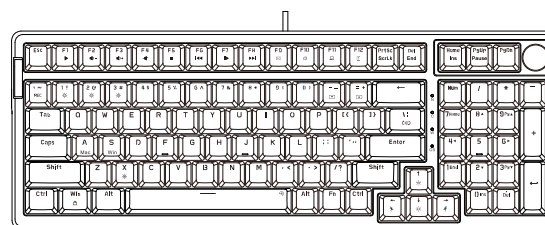

-5-

2. Indicator Light Description


“N” : NUM indicator
Press Num to turn off the white light, which means that the function of the digital area on the right is turned off, and the white light is always on by default to enable the function.
“C” : Caps lock Indicator Light
Press Caps lock to turn on the uppercase white light that is always on, and turn off Caps lock to indicate that the white light is off.
“W” : FN+Win Indicator Light
Press the lock Win, the indicator light will light up white, and then press the unlock button to turn off the white light.
“OS” : System Switching Indicator Light
FN+A switches to the mac system mode, the white light is always on, and FN+S switches to the Win system mode, and the white light is off.

3. Scroll Wheel Function Description

① Volume adjustment function:
Turn the knob to the right: volume +
Turn the knob to the left: volume -
② Mute: Press to mute, then press to restore.
Note: By default, the volume adjustment will follow the computer, and the computer volume will jump 2 bars after turning one bar.

4. Backlight Mode

FN+ \ : Lighting effect switching, 20 kinds of lighting effects cycle in turn
FN+ ↑ : Light brightness + (five gears, the default factory maximum brightness) when adjusted to the limit, the overall backlight flashes 3 times to indicate
FN+ ↓ : Light brightness - (five gears) when the overall backlight is turned off when it is adjusted to the limit
FN+ ← : Lighting direction adjustment
FN+ → : Lighting effect direction adjustment
FN+ _ : Light speed - (five gears, factory default three gears) when adjusted to the limit, the overall backlight flashes 3 times to indicate

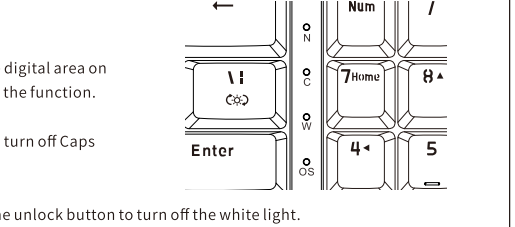

-6-

FN+ = : When the light speed + (five gears) is adjusted to the limit, the overall backlight flashes 3 times to indicate
FN+ X : Turn off the light/turn on the light
FN+ Space bar : Press and hold for 3-5 seconds, the backlight of the keyboard will flash 3 times, and the factory settings will be restored

Turn On Light Recording
 FN+11, 2@, 3# can customize three groups of game lighting effects
 FN+11: Default FPS mode—W/A/S/D/↑/↓/←/→
 FN+2@: Default LOL mode—Q/W/E/R/D/G/F/B/V/L-Ctrl/L-Alt/Tab/Space/1-6/Esc
 FN+3#: Default 37-key office mode—A-Z 26 English letters/[]/;/ ' / . / , / ; / ↑ / ↓ / ← / →
 FN+ -: Record/save the lighting mode for the above three game mode lighting effects


Clear Light Recording
 Reset to clear light recording

6. KeyCombinationFunctionDescription

Key Combination	WIN System	MAC System	Key Combination	WIN System	MAC System
FN+F1	Media Player	Screen Brightness -	FN+F7	Play / Pause	Previous Piece
FN+F2	Volume -	Screen Brightness +	FN+F8	Next Song	Play / Pause
FN+F3	Volume +	Mission Control	FN+F9	Mail	Next Song
FN+F4	Mute	Console	FN+F10	Browser	Mute
FN+F5	Stops / Play	Backlight Brightness-	FN+F11	My Computer	Volume -
FN+F6	Previous Song	Backlight Brightness+	FN+F12	Calculator	Volume +
FN+ PRTSC	SCROLL		FN+DEL	END	
FN+HOME	INS		FN+PGUP	PAUSE	

-7-

7. Instructions for Hot Plug Operation Steps
 Hot-Swappable: Different switches can be replaced, any switch you want can be customized, and 3 pins are compatible with most mechanical switches. (The picture is for reference only, the actual product shall prevail)

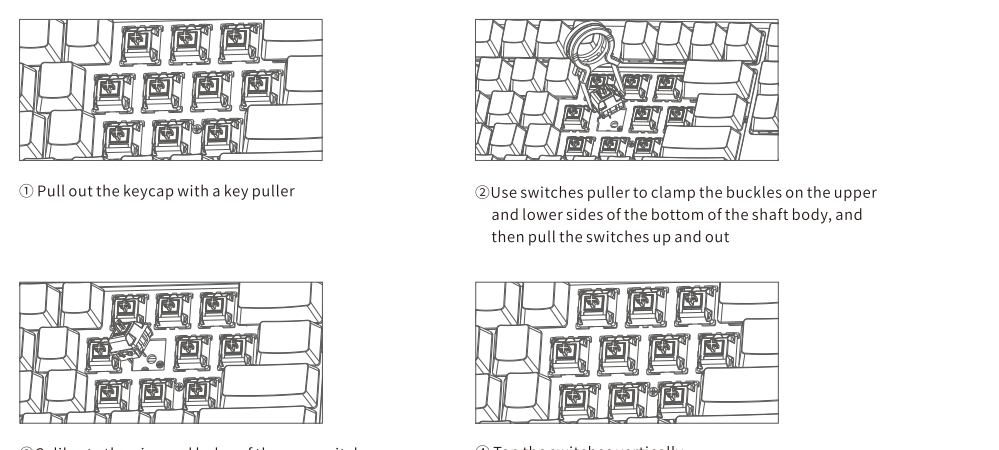

① Pull out the keycap with a key puller
② Use switches puller to clamp the buckles on the upper and lower sides of the bottom of the shaft body, and then pull the switches up and out
③ Calibrate the pins and holes of the new switches
④ Tap the switches vertically

-8-

产品质保 (Product Warranty)
 感谢您对黑爵产品的信任与支持, 为了让您放心使用本产品, 更好地保障您的权益, 我公司将严格遵守并执行相关规定, 实行售后服务。
 1、服务有效期: 自购买之日起质量保证12个月
 2、服务内容: 按微型计算机商品维修更换退货责任规定进行服务
 3、不属于服务范围:
 a. 已经超出有效服务或免费维修期的;
 b. 未按照正确使用说明使用、维护、保管导致故障或损坏的;
 c. 非本司授权维修机构维修导致的故障或损坏;
 d. 质保卡上无经销商资料及盖章之产品;
 e. 擅自涂改三包凭证内容的;
 f. 由于不可抗力(如自然灾害等)原因造成产品之不良;
 g. 人为因素导致产品不良(如操作失误、磕碰、输入不合适电压等);
 h. 其他非产品设计、技术、制造、质量等问题导致的故障或损坏。

质保卡 (Warranty Card)

产品型号: _____
 购买日期: _____
 客户姓名: _____
 联系电话: _____
 联系地址: _____

• 本凭证为黑爵产品售后服务的重要依据, 请您妥善保管。
 • 任何产品问题, 可关注微信公众号咨询小编。

合格证
AJAZZ × NACODEX
合格品
PMS

了解更多产品信息请关注
 微信公众号: 请搜索“AJAZZ黑爵外设”
 抖音号: 请搜索“ajazz2009”

制造商: 深圳市黑爵同创电子科技有限公司
 地址: 深圳市光明区凤凰街道东坑社区科能路中集智园大厦A座21楼
 电话: 86-0755-2740 7340
 执行标准号: GB/T 14081-2010

-9-