
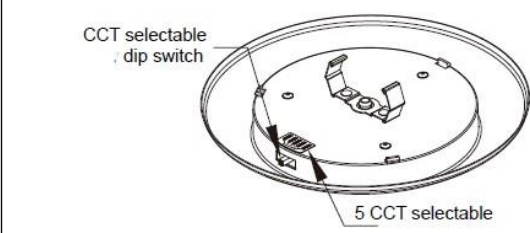







COLOR SELECTABLE 5" & 6" LED SURFACE MOUNT DOWNLIGHT FIXTURE

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

New Construction to 4" Junction Box

 CCT selectable dip switch 5 CCT selectable	Note: Toggle the dip switch on the back of the disc light (A) to select the correlated color temperature (CCT) prior to installation.
1. For 4" junction box installation, attach the mounting brackets (F) to the junction box using the two mounting screws (E).	1 
2. Pull out the source wires from the outlet box. Make wire connections to fixture (A) using wire nuts (D): black to black, white to white, and ground to ground. Carefully push the wires back into the outlet box.	2 
3. Align the springs on the back of the fixture with the slots on the mounting bracket (F). Push the fixture upwards until the springs engage with the mounting brackets (F) and the fixture is flush with the ceiling.	3 




Retrofit Installation to 5"-6" Recessed Housing

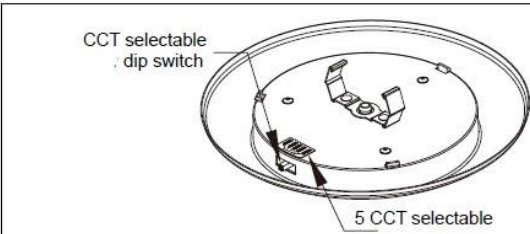 CCT selectable dip switch 5 CCT selectable	Note: Toggle the dip switch on the back of the disc light (A) to select the correlated color temperature (CCT) prior to installation.
--	--



COLOR SELECTABLE 5" & 6" LED SURFACE MOUNT DOWNLIGHT FIXTURE

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

1. For 5"-6" recessed housing installation, secure the torsion springs (B) to the mounting brackets (F) using that spring holder screws (G). Then, connect the mounting brackets (F) to the back of the disc light (A) by snapping into place.	1 
2. Connect the E26 base whip (C) to the fixture (A), making connections using wire nuts (D): black to black and white to white. Cap the ground wire using a wire nut. Then, connect the E26 base whip (C) to the socket inside of the recessed housing by screwing it into the socket.	2 
3. Squeeze the torsion springs (B) together and install into torsion spring brackets inside of the recessed housing while pushing the fixture into the recessed housing. Gently pull to ensure the fixture is secure and firmly in place.	3 

Troubleshooting

- The light does not illuminate
 - With power supply turned off, ensure all connections are made correctly.
 - Make sure the circuit breaker is on and that switch controlling branch circuit is on.
- If the fixture still does not illuminate, call a certified electrician.

Dimming

- This product is suitable for use in dimming circuits. For 10%-100% light control, use with an LED-compatible dimmer (sold separately), including
 - LUTRON SCL-153P, LUTRON CTCL-153P
 - LUTRON DVCL-153P, LUTRON MACL-153M

Care and Maintenance

- Only use a mild soap and/or water with a soft cloth to clean the fixture. Harsh chemicals will damage the fixture. Do not wipe the fixture with a rough cloth as that may scratch the finish or the lens.



COLOR SELECTABLE 5" & 6" LED SURFACE MOUNT DOWNLIGHT FIXTURE

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

⚠ WARNING

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required when installing with a 4" junction box to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.

⚠ ADVERTENCIA

- Antes de instalar, reparar o realizar el mantenimiento de rutina de este equipo, siga estas precauciones generales.
- Para reducir el riesgo de muerte, lesiones personales o daños a la propiedad por fuego, descarga eléctrica, caída de piezas, cortes / abrasiones y otros peligros, lea todas las advertencias y instrucciones incluidas con y en la caja del dispositivo y todas las etiquetas del dispositivo.
- Se requiere una conexión a tierra adecuada cuando se instala con una caja de conexiones de 4" para garantizar la seguridad.
- Se debe apagar la energía en el disyuntor antes de la instalación o el mantenimiento.
- Este producto debe ser instalado de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los peligros involucrados.
- Utilice guantes y protección para los ojos en todo momento durante la instalación, el servicio o el mantenimiento de la luminaria, y evite la exposición directa de los ojos a la fuente de luz mientras está encendida.
- Para evitar daños o abrasiones en el cableado, no exponga el cableado a bordes de láminas de metal u otros objetos afilados.
- No instale un producto dañado. Inspeccione la luminaria en busca de daños que puedan haber ocurrido durante el tránsito. Si está dañado, comuníquese con el fabricante de inmediato.
- Estas instrucciones no pretenden cubrir todos los detalles o variaciones en el equipo ni proporcionar todas las posibles contingencias a cumplir en relación con la instalación, operación o mantenimiento. Si desea obtener más información o si surgen problemas particulares que no están suficientemente cubiertos para los propósitos del comprador o propietario, comuníquese con el fabricante.