


Yealink



Yealink Documentation
support.yealink.com

DECT IP Phone W78P&W78H

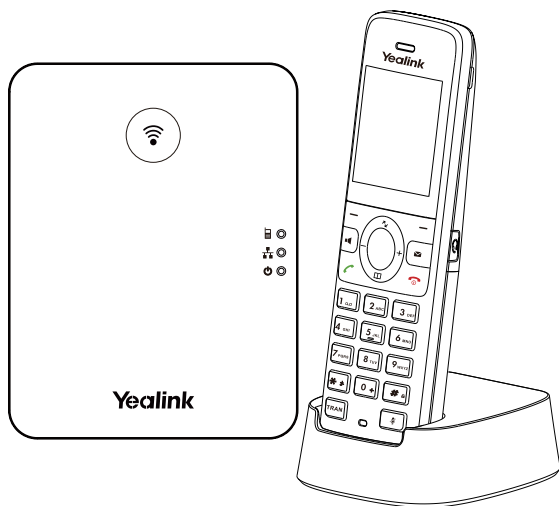


Quick Start Guide (V1.1)

W78P Package Contents



W78H
Handset



W70B Base Station



2 Power Adapters
(Optional)



Base Stand



Ethernet Cable



Battery Cover



Rechargeable
Battery



Belt Clip



Charging Cradle



Quick Start
Guide

Note: Yealink W78P DECT IP phone consists of one W70B base station and one W78H handset.

W78H Package Contents



W78H
Handset



Power Adapters



Battery Cover



Rechargeable
Battery



Belt Clip



Charging Cradle




Quick Start
Guide

Note: We recommend that you use the accessories provided or approved by Yealink.
The use of unapproved third-party accessories may result in reduced performance.


Assembling the DECT Phone

1. Connect the base station power and the network using method a or method b.

a. AC Power Option



b. PoE (Power over Ethernet) Option

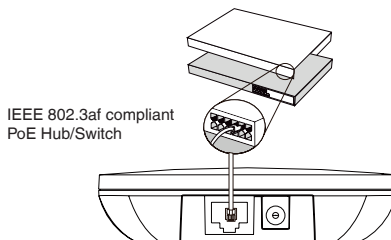


Note:

- If you choose method a, use Yealink supplied power adapter (5V/0.6A). A third-party power adapter may damage the base station.
- If you choose method b, you do not need to connect the power adapter. Make sure the hub/switch is PoE-compliant.


2a. (Desktop Installation) Attach and remove the base stand.

Attach the Base Stand

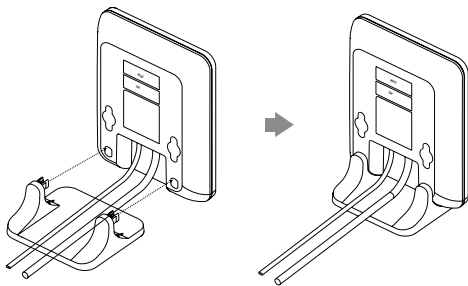


Align the snap-fits with the corresponding holes and push forward, snapping them into the holes.

Remove the Base Stand




Remove the snap-fits from the holes horizontally.


2b. (Wall-Mount Installation) Attach the base station.

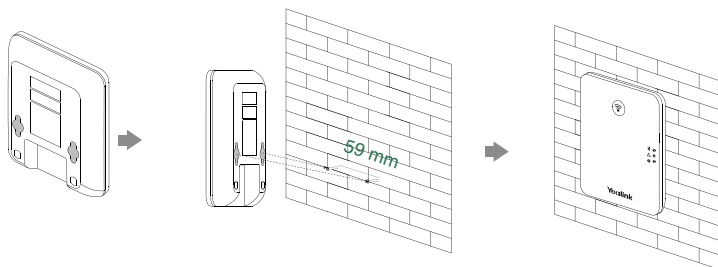


3. Insert the battery into the handset.

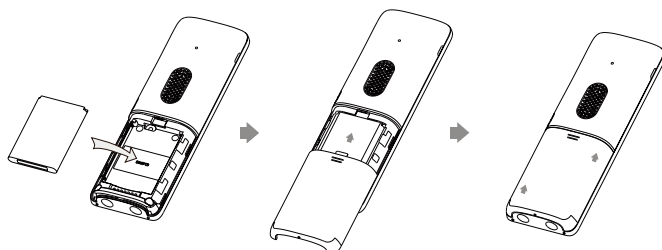


4. Attach the belt clip to the handset.

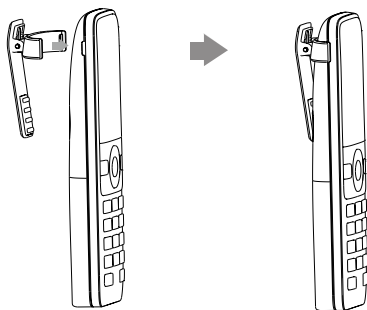

5. (Optional) Mount the charging cradle to the wall.

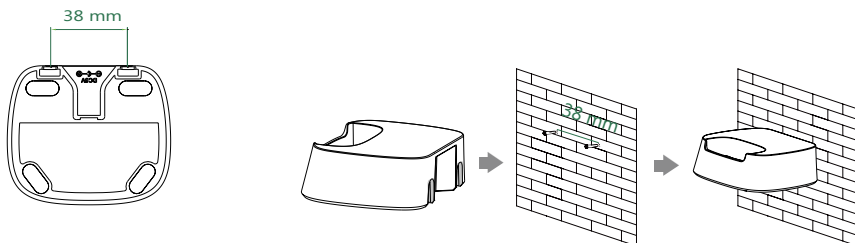

6. Connect the charging cradle and charge the handset.

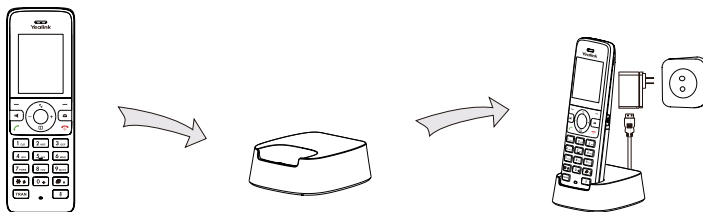


Note:

- Use Yealink-supplied power adapter (5V/0.6A). A third-party power adapter may damage the handset.
- Check the charging status on the top-right corner of the LCD screen.

Getting Started

Handset Registration

You can register up to 10 handsets to one W70B base station. Each handset can be registered to 4 different base stations.

When the handset LCD screen prompts “Unregistered!”, long press  on the base station till the registration LED indicator flashes.

There are two methods to register a new handset:

Easy Registration:

1. Press the **Reg** soft key on the handset to register quickly.

Normal Registration:


1. Press the **OK** soft key on the handset, and then select **Register Handset**.
2. Select the desired base station and then press the **OK** soft key. The handset begins searching the base station.
3. Press the **OK** soft key after searching a base station successfully.
4. Enter the base station PIN (default: 0000), and then press the **Done** soft key to complete the registration.

To register to multiple base stations, press **OK** to enter the main menu, and select **Settings->Registration->Register Handset**, then repeat steps 2-4.

Note:

- If the handset is registered to the base station successfully, the handset LCD screen prompts “Handset Subscribed” and “Base NO.” (the last 4 characters indicate the base station’s MAC address).
- If the handset LCD screen prompts “Searching for Base”, check that your base station is powered on.

Hardware Component Instructions

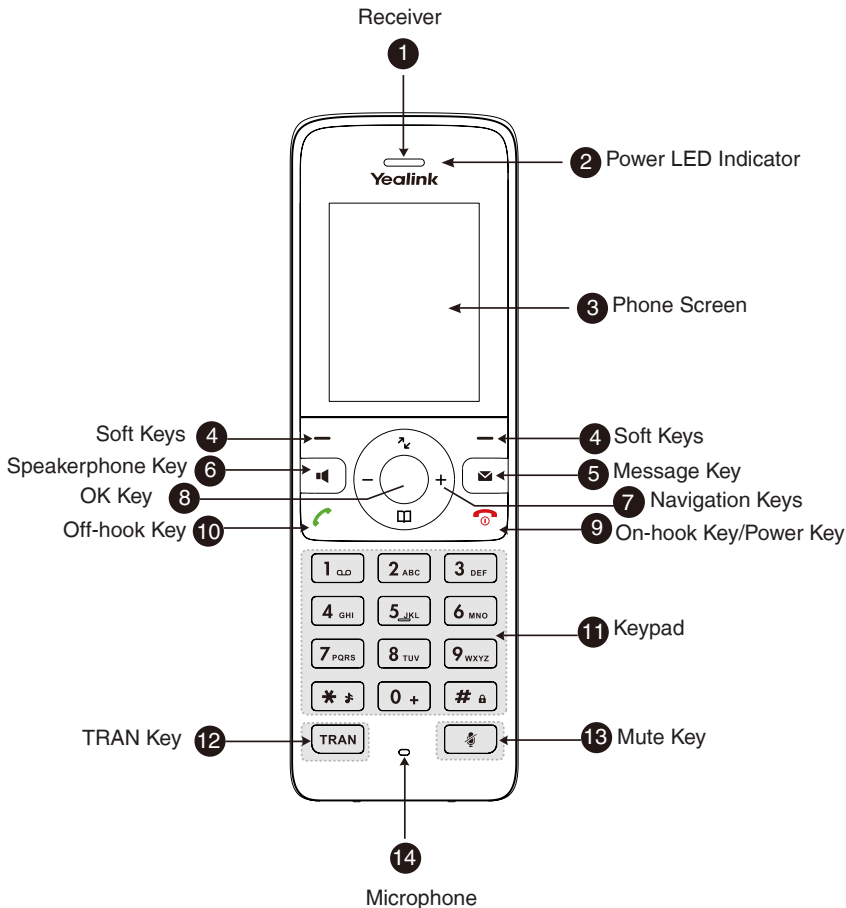

Operating Temperatures

- Operating temperature: +14 to 122°F (-10 to 50°C)
- Relative humidity: 5% to 90%, noncondensing
- Storage temperature: -22 to +158°F (-30 to +70°C)

EU Regulatory Information

- Support Frequency Bands and Power;
- DECT 1.8GHz-1.9GHz<24 dBm
- Bluetooth 2.4GHz < 20 dBm

FCC part 68 Warning:

1.This equipment complies with Part 68 of the FCC rules and the requirements adopted by the ACTA.

On the bottom of this equipment is a label that contains, among other information, a product identifier in the format US:AAAEQ##TXXXX. If requested, this number must be provided to the telephone company.

2.A plug and jack used to connect this equipment to the premises wiring and telephone network must comply with the applicable FCC Part 68 rules and requirements adopted by the ACTA. A compliant telephone cord and modular plug is provided with this product. It is designed to be connected to a compatible modular jack that is also compliant. See installation instructions for details.

3.If this equipment [US: T2LIPNANW78HV1] causes harm to the telephone network, the telephone company will notify you in advance that temporary discontinuance of service may be required. But if advance notice isn't practical, the telephone company will notify the customer as soon as possible. Also, you will be advised of your right to file a complaint with the FCC if you believe it is necessary.

4.The telephone company may make changes in its facilities, equipment, operations or procedures that could affect the operation of the equipment. If this happens the telephone company will provide advance notice in order for you to make necessary modifications to maintain uninterrupted service.

5.If trouble is experienced with this equipment [US: T2LIPNANW78HV1], for repair or warranty

information, Service can be facilitated through our office at:

U.S. Agent Company name: 888VoIP / American Technologies, LLC

Address: 611 Jamison Rd Suite 1059 Elma NY 14059 USA

Tel: 716-714-8002

If the equipment is causing harm to the telephone network, the telephone company may request that you disconnect the equipment until the problem is resolved.

6.Please follow instructions for repairing if any (e.g. battery replacement section); otherwise do not alternate or repair any parts of device except specified. For repair procedures, follow the instructions outlined under the limited warranty.

7.Connection to party line service is subject to state tariffs. Contact the state public utility commission, public service commission or corporation commission for information.

8.If your home has specially wired alarm equipment connected to the telephone line, ensure the installation of this [IP] does not disable your alarm equipment. If you have questions about what will disable alarm equipment, consult your telephone company or a qualified installer.

9.If the telephone company requests information on what equipment is connected to their lines, inform them of:

a)The ringer equivalence number [NAN]

b)The USOC jack required [N/A]

c)Facility Interface Codes ("FIC") [N/A]

d)Service Order Codes ("SOC") [N/A]

e)The FCC Registration Number [US: T2LIPNANW78HV1]

10.The REN is used to determine the number of devices that may be connected to a telephone line.

Excessive RENs on a telephone line may result in the devices not ringing in response to an incoming call. In most but not all areas, the sum of RENs should not exceed five (5.0). To be certain of the number of devices that may be connected to a line, as determined by the total RENs, contact the local telephone company. The REN for this product is part of the product identifier that has the format US:AAAEQ##TXXXX. The digits represented by ## are the REN without a decimal point. For this product the FCC Registration number is [US: T2LIPNANW78HV1] indicates E2 the REN would be NAN.

11.We suggest the customers use a surge arrester to protect the device.

FCC CAUTION

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

—Reorient or relocate the receiving antenna.

—Increase the separation between the equipment and receiver.

—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

—Consult the dealer or an experienced radio/TV technician for help.

The W78H handset has been tested and comply with FCC SAR limits.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

ISED WARNING

This device complies with Innovation, Science and Economic Development Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation n'est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d' compromettre le fonctionnement.

Privacy of communications may not be ensured when using this phone.

La confidentialité des communications peut ne pas être garantie lors de l'utilisation de ce téléphone.

The W78H handset has been tested and comply with ISED SAR limits.

Le combiné W78H a été testé et est conforme aux limites SAR d'ISED.

This device meets HAC and CS03 Part V.

"This device meets the applicable Innovation, Science and Economic Development Canada technical specifications. / Ce produit répond à la innovation, des sciences et de .Développement économique Canada spécifications techniques applicables."