

BLANCO 526180

BLANCO Lanora-S-F 526180 Kitchen Faucet User Manual

High-Pressure Window-Mount Faucet with Pull-Out Spray in Brushed Stainless Steel

INTRODUCTION

This manual provides detailed instructions for the installation, operation, maintenance, and troubleshooting of your BLANCO Lanora-S-F 526180 kitchen faucet. The Lanora-S-F series combines superior quality and elegant design, making it a valuable addition to any modern kitchen. Crafted from solid stainless steel, it offers excellent aesthetics, tactile feel, and daily usability. This single-lever mixer is also environmentally friendly and energy-efficient due to its cold start function, which ensures cold water is drawn first. Its space-saving vertical lever position facilitates installation closer to walls. The pull-out spray provides a generous range of motion, simplifying tasks like filling heavy pots and cleaning large sinks. Additionally, this faucet is specifically designed for installation in front of windows, allowing for easy removal and reinsertion.



Figure 1: The BLANCO Lanora-S-F kitchen faucet, showcasing its elegant design and brushed stainless steel finish.

SETUP AND INSTALLATION

The BLANCO Lanora-S-F faucet is designed for easy installation, particularly with its flexible window-mount feature.

Key Installation Features:

- **Flexible Window Mounting:** The faucet can be easily lifted vertically from its base and laid aside to allow for window opening.
- **Cold Start Function:** This energy-saving feature ensures that cold water is drawn first when the lever is in the basic position, preventing unnecessary hot water consumption. It also allows for installation closer to the wall due to the lever's vertical position.
- **Easy Assembly:** Comes with flexible connection hoses (450 mm long) and a 3/8" nut. A 35 mm diameter faucet hole is required. A stabilization plate ensures stable mounting in stainless steel sinks.



Für die Montage vor dem Fenster: Armatur senkrecht hochheben und zur Seite legen
Dieses Szenebild ist beispielhaft. Alle Informationen entnehmen Sie bitte der Artikelbeschreibung.

Figure 2: Demonstrates the window-mount functionality. The faucet can be lifted vertically and moved horizontally to clear the window opening.

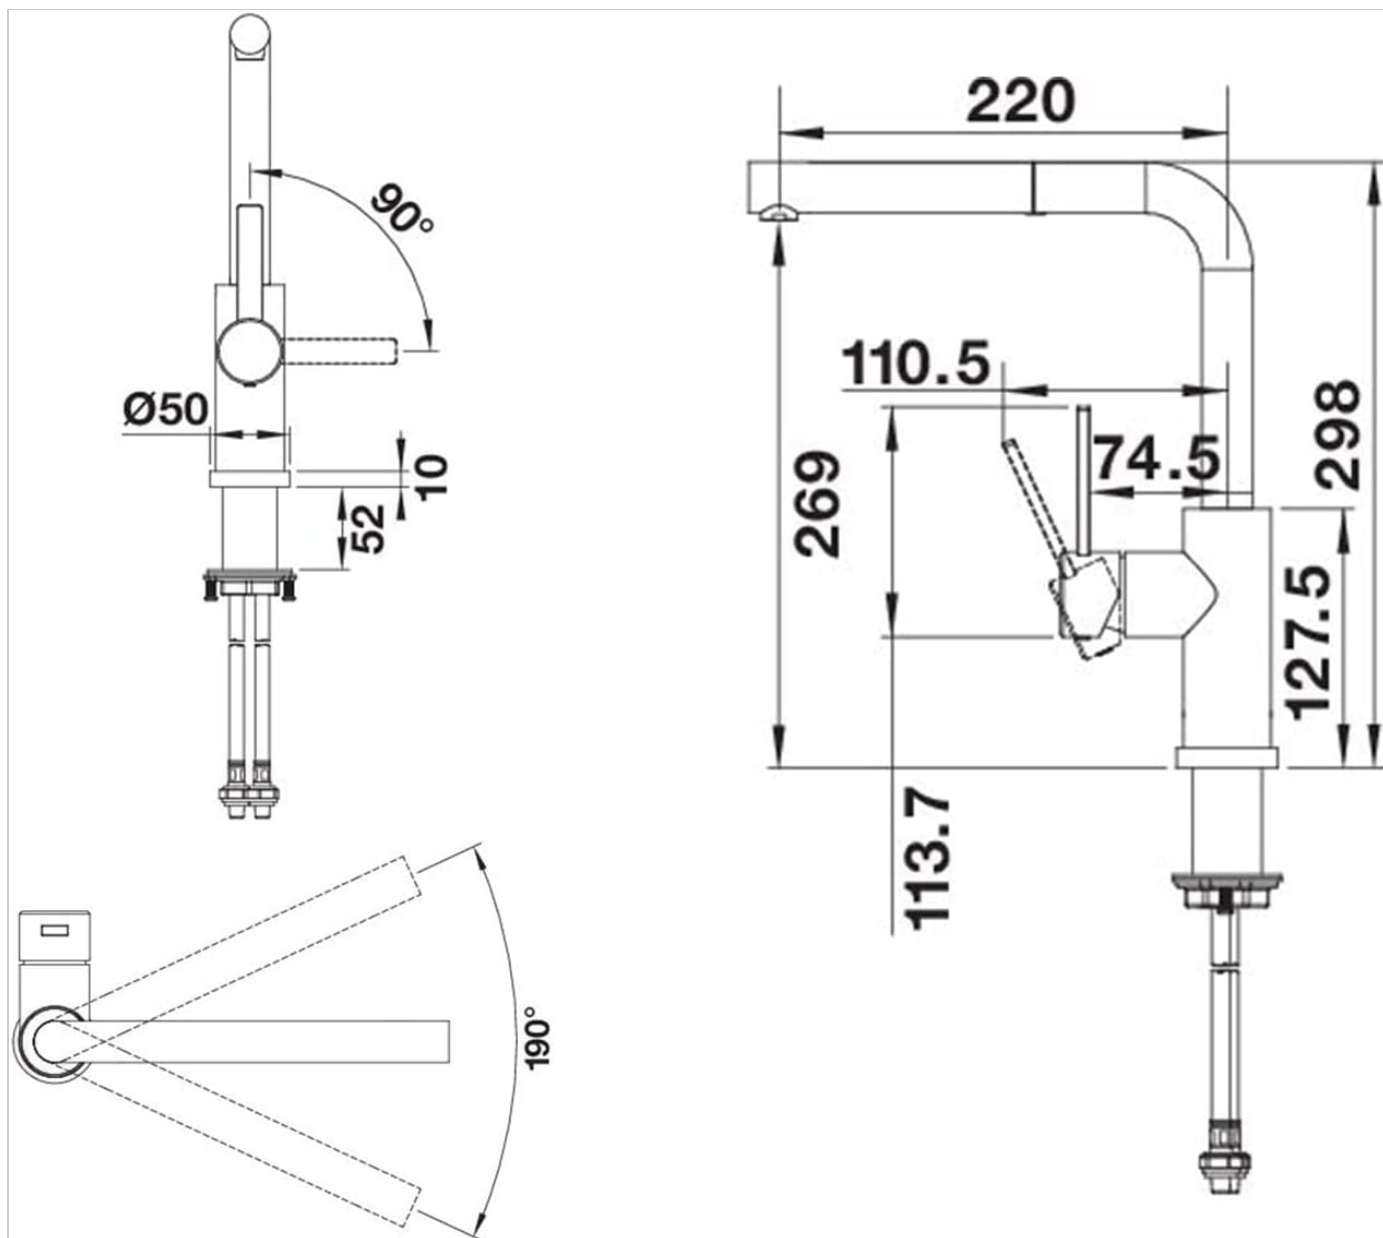


Figure 3: Technical drawing showing the dimensions and swivel range of the BLANCO Lanora-S-F faucet.

OPERATING INSTRUCTIONS

Your BLANCO Lanora-S-F faucet is designed for intuitive and efficient use.

Using the Single-Lever Mixer:

- **Water Flow and Temperature:** The single lever controls both water flow and temperature. Move the lever up to increase flow and down to decrease. Move it to the right for cold water and to the left for hot water.
- **Cold Start Function:** When the lever is in the central, basic position, only cold water will flow, saving energy.

Utilizing the Pull-Out Spray:

The pull-out spray provides extended reach and flexibility for various kitchen tasks.

- Gently pull the spray head from the main spout to extend the hose.
- Use the extended spray for rinsing dishes, cleaning the sink, or filling large pots outside the sink basin.
- After use, guide the spray head back into the spout until it clicks securely into place.



Figure 4: A hand demonstrating the use of the pull-out spray.



Dieses Szenebild ist beispielhaft. Alle Informationen entnehmen Sie bitte der Artikelbeschreibung.

Figure 5: The faucet in operation with the pull-out spray extended, showing its versatility.

MAINTENANCE AND CARE

To ensure the longevity and pristine appearance of your BLANCO Lanora-S-F faucet, regular cleaning and proper care are essential.

Cleaning Instructions:

- Use a soft cloth and mild soap or a non-abrasive cleaner specifically designed for stainless steel.
- Avoid abrasive sponges, scouring pads, or harsh chemical cleaners, as these can damage the brushed stainless steel finish.
- Rinse thoroughly with clean water after cleaning and dry with a soft cloth to prevent water spots.
- For stubborn water spots or mineral deposits, a solution of vinegar and water can be used, followed by thorough rinsing.

General Care:

- Regularly check the connection hoses for any signs of leaks or wear.
- Ensure the pull-out spray retracts smoothly. If it becomes stiff, check for any obstructions in the hose path.



Figure 6: A detailed view of the brushed stainless steel finish, highlighting the importance of proper cleaning to maintain its appearance.



Figure 7: A close-up of the faucet's joint and lever, showing the quality of craftsmanship. Regular cleaning around these areas is recommended.

TROUBLESHOOTING

This section addresses common issues you might encounter with your BLANCO Lanora-S-F faucet.

Problem	Possible Cause	Solution
Low Water Flow	Clogged aerator; kinked supply line; low water pressure in household.	Clean or replace aerator. Check supply lines for kinks. Consult a plumber if household water pressure is consistently low.
Leaking from Spout	Worn out cartridge; mineral buildup.	Contact BLANCO customer support for a replacement cartridge. Clean any visible mineral buildup around the spout.
Leaking from Base	Loose mounting nut; damaged O-rings.	Tighten the mounting nut under the sink. Inspect and replace O-rings if damaged.
Pull-Out Spray Does Not Retract Fully	Obstruction in hose path; weight not properly positioned.	Check under the sink for any items obstructing the hose. Ensure the counterweight on the hose is correctly installed and free to move.

If you encounter issues not listed here or if the suggested solutions do not resolve the problem, please contact BLANCO customer support.

SPECIFICATIONS

Detailed technical specifications for the BLANCO Lanora-S-F 526180 kitchen faucet.

Feature	Detail
Model Number	526180
Dimensions (L x W x H)	9.55 x 26.1 x 29.8 cm (approx. 3.76 x 10.28 x 11.73 inches)
Weight	2.2 Kilograms (approx. 4.85 lbs)
Color	Brushed Stainless Steel
Finish	Brushed
Material	Stainless Steel
Installation Method	Single-hole
Number of Handles	1
Flow Rate	1 Centilitre per second
Spout Height	265 Millimeters (approx. 10.43 inches)
Spout Reach (Depth)	220 Millimeters (approx. 8.66 inches)
Handle/Lever Placement	Right
Special Features	360° Swivel, Pull-out Spray, Cold Start Function, Window-Mount Capability
Components Included	Faucet with connection hoses, mounting kit



WARRANTY AND SUPPORT


BLANCO stands behind the quality of its products.

- **Spare Parts Availability:** Spare parts for this product are available for 2 years from the date of purchase.
- For warranty claims, technical support, or to order spare parts, please contact BLANCO customer service. Refer to the official BLANCO website or your purchase documentation for contact details specific to your region.

© 2024 BLANCO. All rights reserved.

Related Documents - 526180

	BLANCO CATRIS Faucet Specifications and Installation Guide Detailed specifications, features, planning information, codes, standards, and warranty for the BLANCO CATRIS faucet in Metal Finish. Includes installation dimensions and compliance information.
	BLANCO CATRIS-S HD Faucet Installation and Care Guide Comprehensive installation and maintenance guide for the BLANCO CATRIS-S HD kitchen faucet. Includes parts list, step-by-step instructions, technical specifications, and care recommendations from BLANCO.
	BLANCO Kitchen Sinks: Installation, Dimensions, and Care Guide Detailed installation guide and technical specifications for BLANCO kitchen sinks, including models like ANDANO, ETAGON, SOLIS, SUPRA, and S-STYLE. Features dimensions, care instructions, and contact information.
	BLANCO LINUS-S HD Mixer Tap Installation and Maintenance Guide Comprehensive guide for the installation, operation, and maintenance of the BLANCO LINUS-S HD mixer tap, including safety and hygiene information.
	BLANCO SILGRANIT® Sink Installation Guide and Specifications This document provides installation instructions and technical specifications for BLANCO SILGRANIT® sinks. It includes step-by-step visual guides, material care information, and a comprehensive table of sink models with their dimensions and tolerances.
	Blanco Drop-in and Undermount Sink Installation Guide Comprehensive installation instructions for Blanco stainless steel and Silgranit drop-in and undermount kitchen and bar sinks. Includes tools, materials, step-by-step procedures, and important notes for professional installers.



Colonis



massif inox brossé

lang:fr score:24 filesize: 671.1 K page_count: 4 document date: 2018-09-08

Benefits



Colours



solid stainless steel

lang:en score:21 filesize: 695.84 K page_count: 4 document date: 2018-09-08

DW-5525CL0458

Anwendungsbereich field of application	Produkte für Innenraumgestaltung products of interior design
Zertifizierungsstelle issuer of certificate	Blanco GmbH & Co KG Pöfingers Straße 35, D-70308 Oberöndringen
Verleiher distributor	Blanco GmbH & Co KG Pöfingers Straße 35, D-70308 Oberöndringen
Produkt product category	Spülmaschine – Einglied-Senkversenker (S06)
Funktion/Bezeichnung product description	Einglied-Senkversenker
Modell model	BLANCO CANDOR
Produktcode product code	Einbaumatzeig: 39.11914/18.01819 von 1.12.2020 (TZ02) Einbaumatzeig: 2.2040422 T11 von 28.05.2021 (TZ02) Einbaumatzeig: 2.2012229 von 28.05.2021 (TZ02) Einbaumatzeig: 2.2050424 von 28.05.2021 (TZ04)
Prüfungstermin test date	D/IN 97 874 (01.04.2007) D/IN 98 817 (01.09.2008)


Abiaudatum / AZ
date of receipt / file no.

10 US 2025 Form A-112



謝志偉

lang:de score:19 filesize: 430.09 K page count: 4 document date: 2025-03-24



Verfügbare Farben
Edelstahl gebürstet

massiv Edelstahl gebürstet



DW-6506DL0368

[illegible]

(b) (1) (2000) FR A-112

DAKKS
Dachverband
Autorenkollaboration
Österreich

COAST GUARD (01243)
Non-UK residents call
Jagdish Patel on 01243 551 233
Tel: +44 (0)1243 551 233
Fax: +44 (0)1243 551 233



Für den Gegenstand: Einhandmischer-Spültischarmatur mit ausziehbarem Auslauf
Serie Lanora-S-F, Az.-Nr. 526 180

wird hiernä auf Grund § 19 der Landesbauordnung Baden-Württemberg (LBO) i.d.F. der Bek. v. 05.03.2010 - letzte Änderung vom 20.11.2023 (GBl. S. 422) und der Verwaltungsvorschrift Technische Baubestimmungen (VwV TB) des Landes Baden-Württemberg vom 11.07.2024, (Id. Nr. C.3.7, ein allgemeines bauaufsichtliches Prüfzeugnis zum Nachweis der Verwendbarkeit hinsichtlich des Geräuschschutzes erteilt.)

Antragssteller:	BLANCO GmbH + Co. KG Flethinger Straße 59 D-75038 Oberderdingen
Ausstellungsdatum:	03. März 2025
Geltungsdauer bis:	31. März 2030
Prüfzeugnis-Nummer:	P-IX 29919/10 **

Dieses allgemeine bauaufsichtliche Prüfzeugnis umfasst 5 Seiten.

*) Es wird hier auf die Dauerordnung des Landes Bezug genommen, in deren der Antragsteller seinen Sitz hat; das allgemeine bausatzrechtliche Prüfungsrecht gilt jedoch in allen Bundesländern.

Das Foto mag nicht auf einen ersten Blick verwirrend wirken. Jede Verwirrung ist in Kürze oder Auslassung bedarf der vorherigen Genehmigung durch die TRUP.

TDY Rheinland-LGA Products GmbH
Grenzallee 2 • 90441 Nürnberg
Tel. +49 (0) 911 555-5225 • Fax +49 (0) 911 555-5226
E-Mail: service@tdy-lga.com • www.tdy.com/handlines

Bezirk und Registergericht Nürnberg HRB 26015
Gesellschaft mit beschränkter Haftung
Thorsten Wang und Dr. Jörg Stübgen
USt-IdNr. DE 31100003

DOI: 10.1002/for

lang:de score:15 filesize: 531.13 K page count: 5 document date: 2025-03-03



[pdf] Datasheet

blanco template Blanco Lanora S F HD brushed stainless steel Data sheet

e3af7deb047357059b9e18272cbd8c3c3729 gzhls at blob ldb 0 7 8 d |||

Produktdatenblatt LANORA-S-F Art. Nr. **526180** Vorteil - Fr die Montage vor dem Fenster - Hochwertige Ausführung in massivem Edelstahl, Oberfläche gebürstet - Klares Armaturendesign fr moderne Kchen - Hoher, herausziehbarer Auslauf fr leichtes Befüllen von Tpfen und Vasen - Grere Gestaltungsfreiheit bei E...

lang:de score:15 filesize: 664.31 K page_count: 4 document date: 2018-09-08



[pdf]

blanco template Armatur Edelstahl gebürstet HD Schlauchb i Häfele Danmark shoppish 04939447haefele

dk prod live static WFS Haefele HDK Site da DK pim documents pish 04939447 |||

Produktdatenblatt LANORA-S-F Art. Nr. **526180** Vorteil - Fr die Montage vor dem Fenster - Hochwertige Ausführung in massivem Edelstahl, Oberfläche gebürstet - Klares Armaturendesign fr moderne Kchen - Hoher, herausziehbarer Auslauf fr leichtes Befüllen von Tpfen und Vasen - Grere Gestaltungsfreiheit bei E...

lang:de score:14 filesize: 606.51 K page_count: 4 document date: 2018-09-08



[pdf]


BLANCO LANORA S F HD Rev01 star ing Ingenieurbüro Marko Vischer GmbH Co KG blanco lanora sf

hd Dec 16 2024 — 1x 14 mm 17 18 19 PH 2 11 4 5 3 22 7 6 10 9 1 8 15 23 21 20 13 12 526180 bedien

img moebelplus de |||

BLANCO LANORA-S-F HD 70C 158F 10 bar 145 psi 1 9 19 8 6 14 15 7 BLANCO LANORA-S-F HD 10 5 43 1 2 11 12 22 www.blanco.com/sos 20 21 PH 2 13 23 17 14 1x 14 mm 1x 17 mm 1x 18 mm 1x 19 mm 2 35 mm 5 PH 2 7 3 PH 2 4 22 14 6 17 mm 14 mm 8 19 mm 9 II. 11 I. 74 CI Chlor, c...

lang:de score:13 filesize: 1.47 M page_count: 4 document date: 2024-04-09

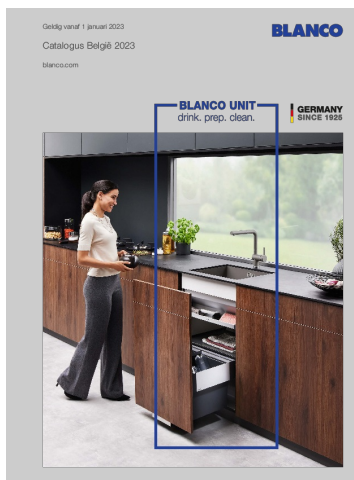


[\[pdf\]](#) Borchure Catalog

Laudert GmbH Co KG blanco catalogus 2023 1 cdn media nl be 03 dokumente brochures bben |||
 Geldig vanaf 1 januari 2023 Catalogus België 2023 blanco.com INHOUD UNIT
 INSPIRATIES 3-9 SPOELBA ... fstand tussen spoeltafel en venstervleugel 4,5 cm
 CERT metaaloppervlak roestvrij staal geborsteld **526180** Raamoplossing Prijs in excl.
 BTW 551,00 Technische tekening 220 In de levering inbegrep...
 lang:de **score:10** filesize: 141.64 M page_count: 372 document date: 2022-11-16



[\[pdf\]](#) Catalog

Laudert GmbH Co KG Soluciones integradas para la zona de aguas en cocina DAKE Escurridor esquina
 235 866 consultar pág 54 PIONA Dispensador jabón plegable 238 482 € 85 00 BLANCOCULINA S Duo
 189 BLANCO Catalogo General BLANCO ES 2022 dake es 11 |||
 Fregaderos, grifera, sistemas de desperdicios y accesorios Tarifa 2022 I.V.A. no
 incluido Solucion ... 113.7 127.5 298 ridad e hig iene Acce Superficie metlica acero
 inox. cepillado sorios BLA CERT **526180** Solucin ventana PVP sin IVA 382,00 Dibujo
 tcnico 220 Incluido en el suministro - Grifo...
 lang:i-klngon **score:10** filesize: 16.41 M page_count: 308 document date: 2022-11-10

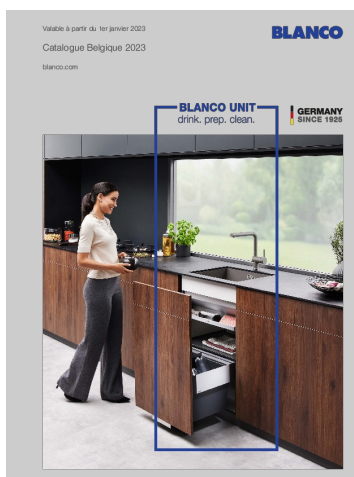


[\[pdf\]](#) Borchure Catalog

Laudert GmbH Co KG blanco catalogue 2023 cdn media fr be 03 dokumente brochures bben |||
 Valable partir du 1er janvier 2023 Catalogue Belgique 2023 blanco.com CONTENU
 UNIT INSPIRATIONS ... nimale entre l vier et le battant de fentre: 4,5 cm CERT
 surface mtallique acier inoxydable bross **526180** Tous les prix en HTVA 551,00
 Solution fentre Dessin technique 220 Compris dans la livrai...
 lang:fr **score:9** filesize: 143.37 M page_count: 372 document date: 2022-11-16




[\[pdf\]](#)

BLANCO katalógus 2022 parafalo hu mosogatótálca és csaptelep AEG ELECTROLUX AIRMEC APELSON BEKO BOSCH CANDY CATA DAVO DE DIETRICH ELICA ELLECI FAGOR FALMEC FOSTER GONAL GORENJE HOTPOINT ARISTON ICF INDESIT INSINKERATOR KDESIGN LIEBHERR MEKAPPA MIDEA MORA NARDI NEFF blanco mosogatótálca katalogus ||| Mosogatók, csaptelepek, hulladkosztályozók Praktikus megoldások a konyhában TARTALOM UNIT INSPIRCIK 3 ... a mosogató s az ablakszárny között 4,5 cm Fmes fellet fnyes rozsdamentes CERT Magasnyoms Magasnyoms **526180** Ablak el szerelhet megoldás Mszaki rajz 220 Alaptartozék - 190-ban elforgatható kifolyós a nag... lang:i-klíngon **score:9** filesize: 20.22 M page_count: 340 document date: 2022-01-09

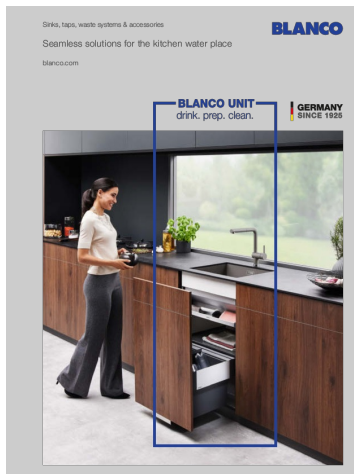

[\[pdf\]](#) Accessories Borchure Catalog

Laudert GmbH Co KG bua catalogue 2023 cdn blanco media 03 dokumente brochures ua ||| Sinks, taps, waste systems accessories Seamless solutions for the kitchen water place blanco.com ... tart Minimum clearance between sink and window sash 4.5 cm CERT Metallic surface stainless steel **526180** Window solution Technical Drawing 220 Scope of supply - 190 swivel spout for greater reach ... lang:en **score:9** filesize: 114.94 M page_count: 340 document date: 2022-11-16

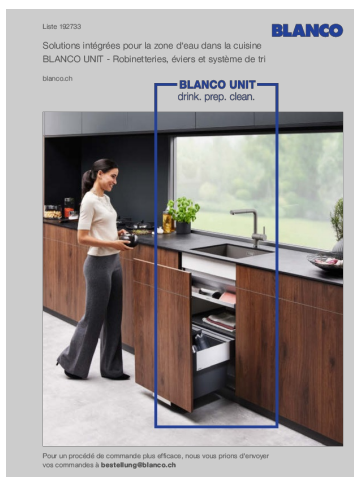

[\[pdf\]](#) Borchure

Laudert GmbH Co KG c23 frach 72dpi 1 cdn blanco media 03 dokumente brochures ch ||| Liste 192733 Solutions intgres pour la zone d'eau dans la cuisine BLANCO UNIT - Robinetteries, vriers ... Avec douchette extractible Distance minimale entre l vier et le battant de la fenetre 4,5 cm CERT **526180** Prix CHF incl. Prix CHF excl. CHF 970,00 CHF 900,65 Mitigeur escamotable, spcial fenetre... lang:fr **score:9** filesize: 115.43 M page_count: 358 document date: 2022-11-23