

Manuals.plus /

› KLARSTEIN /

› Klarstein Beretta Island Exhaust Hood Instruction Manual

KLARSTEIN TK15-BerettaKupfer

Klarstein Beretta Island Exhaust Hood

Model: TK15-BerettaKupfer

INTRODUCTION

Thank you for choosing the Klarstein Beretta Island Exhaust Hood. This manual provides essential information for the safe and efficient installation, operation, and maintenance of your new appliance. Please read this manual thoroughly before use and keep it for future reference.

The Klarstein Beretta Island Exhaust Hood is designed to effectively remove steam, grease, and odors from your kitchen, ensuring a clean and fresh cooking environment. Its elegant design makes it a centerpiece for any modern kitchen island setup.

SAFETY INSTRUCTIONS

WARNING: Failure to follow these safety instructions could result in fire, electric shock, or personal injury.

- Ensure the power supply voltage matches the rating label on the appliance.
- This appliance is intended for domestic use only. Do not use it for commercial purposes.
- Always disconnect the appliance from the power supply before cleaning or maintenance.
- Do not flambé under the range hood.
- The exhaust air must not be discharged into a flue which is used for exhausting fumes from appliances burning gas or other fuels.
- Regularly clean the grease filters to prevent fire hazards.
- Installation must be carried out by a qualified person in accordance with all local regulations and standards.
- Ensure adequate ventilation in the room when the range hood is used simultaneously with gas or other fuel-burning appliances.
- Keep children away from the appliance during operation and cleaning.

PRODUCT OVERVIEW

The Klarstein Beretta Island Exhaust Hood is a high-performance appliance designed for ceiling mounting over freestanding hobs. It features a powerful motor, efficient filtration system, and user-friendly controls.

Key Features:

- **Powerful Air Circulation:** Maximum air circulation up to 650 m³/h.
- **Effective Filtration:** Washable aluminum grease filter and activated carbon filters for odor removal.
- **Easy Operation:** Intuitive push-button control panel with LED lighting.
- **Integrated Lighting:** Switchable LED hob lighting (2 x 1 watt) for clear visibility.
- **Versatile Modes:** Suitable for both extraction (ducted) and recirculation (ductless) operation.
- **Energy Efficient:** Energy efficiency class C.

Components Included:

- 1 x Extractor Hood Unit
- 1 x Chimney Cover
- 3 x Ceiling Mounting Brackets
- 6 x Mounting Brackets
- 1 x Connecting Plate
- 1 x Check Valve (2-piece)
- 1 x Exhaust Hose
- 1 x Mounting Material (screws and dowels)
- 1 x Drill Template
- 2 x Activated Carbon Filters



Figure 1: Klarstein Beretta Island Exhaust Hood (copper) and activated carbon filters.



Figure 2: Control panel with LED illumination. The buttons control power, fan speed, and lighting.

SETUP AND INSTALLATION

The Klarstein Beretta Island Exhaust Hood is designed for ceiling mounting. Due to the complexity and safety requirements, professional installation is highly recommended. Ensure you have all necessary tools and assistance before beginning the installation process.

Pre-Installation Checklist:

- Verify all components listed in the "Components Included" section are present.
- Ensure the ceiling structure is strong enough to support the weight of the hood (approx. 9.4 kg for hood, 5.7 kg for chimney cover).
- Confirm the availability of a suitable electrical outlet (220-240 V ~ | 50 Hz).
- Decide between extraction (ducted) or recirculation (ductless) mode. For extraction, ensure proper ducting is available.

Installation Steps (Summary):

1. **Marking:** Use the provided drill template to accurately mark the drilling points on the ceiling for the mounting brackets.
2. **Mounting Brackets:** Securely attach the ceiling mounting brackets using the supplied screws and dowels.
3. **Hood Assembly:** Assemble the main hood unit and attach the connecting plate and check valve if using extraction mode.
4. **Ducting (if applicable):** Connect the exhaust hose to the hood and route it to the exterior vent.
5. **Electrical Connection:** Connect the hood to the power supply. This step should be performed by a qualified electrician.
6. **Mounting the Hood:** Carefully lift and secure the hood onto the ceiling mounting brackets.
7. **Chimney Cover:** Install the chimney cover, ensuring it aligns properly with the hood.
8. **Filter Installation:** Install the aluminum grease filter and activated carbon filters (for recirculation mode).

Note: The detailed installation instructions, including diagrams, are provided in the multilingual manual included with your product.



Figure 3: Example of the exhaust hood installed in a kitchen island setting.

ALLES DABEI

Geeignet zum Umluft- oder Abluftbetrieb inklusive Aktivkohlefiltern und Abluftschlauch

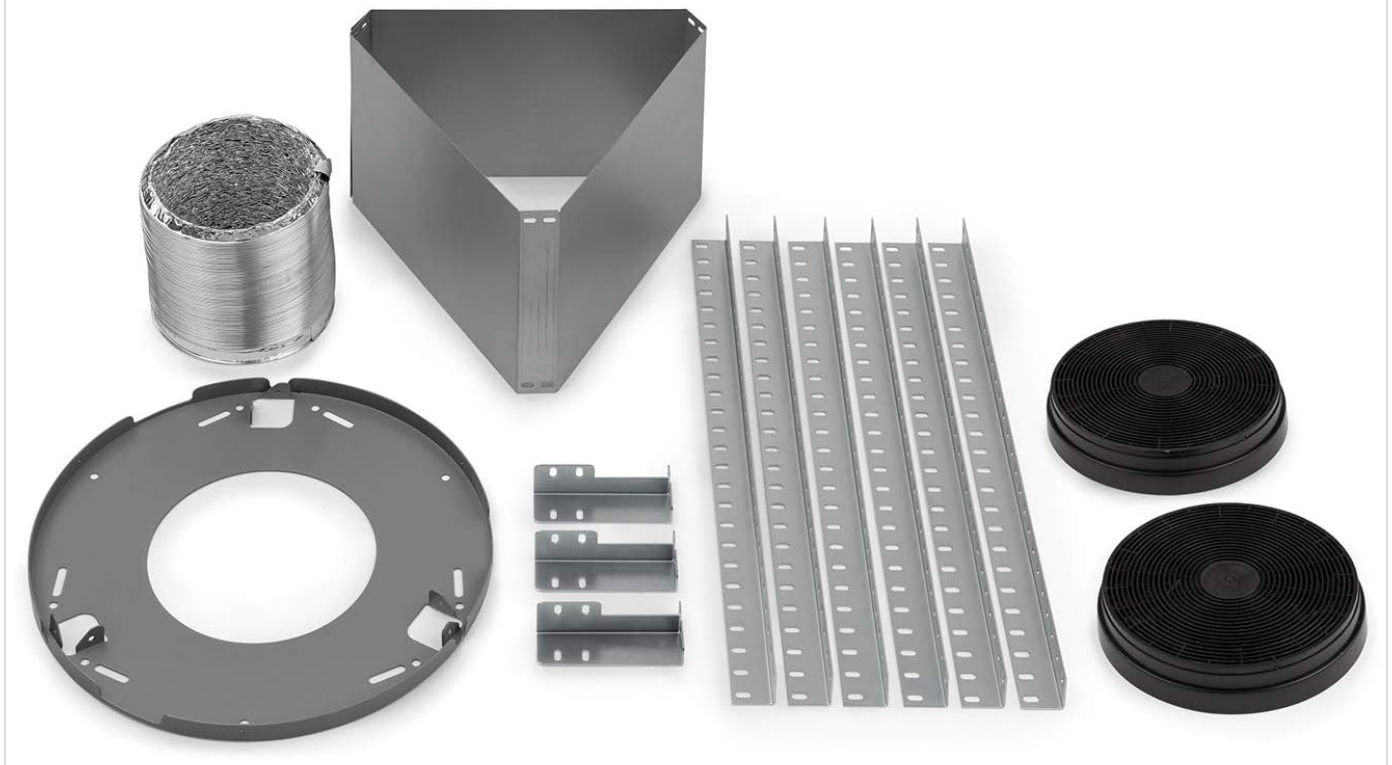


Figure 4: All included components for installation and operation.

OPERATING INSTRUCTIONS

The Klarstein Beretta Island Exhaust Hood features a user-friendly push-button control panel located on the front of the hood.

Control Panel Functions:

- **Power Button (On/Off):** Press to turn the hood on or off.
- **Fan Speed Buttons (1, 2, 3):** Select one of the three available fan speeds to adjust the extraction power according to your cooking needs.
 - *Speed 1:* Low speed for light cooking or simmering.
 - *Speed 2:* Medium speed for general cooking.
 - *Speed 3:* High speed for heavy frying or strong odors.
- **Light Button:** Press to turn the integrated LED hob lighting on or off. The lighting provides clear visibility over your cooking area.

Usage Tips:

- Turn on the hood a few minutes before you start cooking to create an air current.
- Allow the hood to operate for 5-10 minutes after cooking to clear any remaining steam or odors.
- For optimal performance, ensure windows and doors are not creating strong drafts that could interfere with the hood's suction.



Figure 5: The hood effectively extracting steam during cooking.

MAINTENANCE AND CLEANING

Regular maintenance ensures the longevity and optimal performance of your Klarstein Beretta Island Exhaust Hood. Always disconnect the appliance from the power supply before performing any cleaning or maintenance.

Cleaning the Grease Filter:

The aluminum grease filter should be cleaned regularly, depending on usage (typically every 2-4 weeks). A dirty filter can reduce suction power and pose a fire risk.

1. Open the filter clips and remove the aluminum grease filter from the hood.

2. Wash the filter by hand in hot soapy water or in a dishwasher (use a mild detergent and low temperature cycle).
3. Rinse thoroughly and allow the filter to dry completely before re-installing.
4. Re-install the dry filter, ensuring it clicks securely into place.

Replacing the Activated Carbon Filter (for Recirculation Mode):

Activated carbon filters are used for odor absorption in recirculation mode and cannot be washed. They need to be replaced periodically, typically every 3-6 months, depending on usage.

- Remove the aluminum grease filter to access the activated carbon filters.
- Twist or unclip the old activated carbon filters to remove them.
- Install new activated carbon filters, ensuring they are securely attached.
- Re-install the aluminum grease filter.

*Replacement activated carbon filters are available under item number **10027530**.*

General Cleaning:

- Wipe the exterior surfaces of the hood with a soft cloth dampened with mild detergent.
- Do not use abrasive cleaners, steel wool, or harsh chemicals, as these can damage the stainless steel finish.
- Dry all surfaces thoroughly after cleaning.



SAUBERE LUFT

Abwaschbarer Aluminium-Fettfilter & wechselbarer Aktivkohlefilter gegen Küchengerüche

Figure 6: Cleaning the washable aluminum grease filter.

TROUBLESHOOTING

If you encounter issues with your Klarstein Beretta Island Exhaust Hood, please refer to the following table before contacting customer support.

Problem	Possible Cause	Solution
Hood does not turn on.	No power supply; power cord disconnected; circuit breaker tripped.	Check power connection; check circuit breaker; ensure power outlet is functional.
Low suction power.	Grease filters are clogged; activated carbon filters are saturated (recirculation mode); improper installation; external drafts.	Clean grease filters; replace activated carbon filters; check for proper sealing and ducting; close windows/doors if strong drafts are present.
Excessive noise or vibration.	Loose mounting; fan blades are dirty or damaged; motor issue; check valve obstruction.	Check mounting screws and tighten if necessary; clean fan blades; inspect check valve for obstructions (if applicable); contact service if motor issue is suspected.
LED lighting not working.	Light bulb faulty; electrical connection issue.	Check light button operation; if individual LEDs are replaceable, replace faulty ones (consult manual for specific type); contact service if general electrical issue.
Check valve not opening fully (extraction mode).	Obstruction or manufacturing defect.	Inspect the check valve for any debris or misalignment. If it appears defective, contact customer support.

TECHNICAL SPECIFICATIONS

Feature	Specification
Brand	KLARSTEIN
Model Number	TK15-BerettaKupfer
Mounting Type	Island Cooker Hood (Ceiling Mounted)
Material	Stainless Steel
Color	Copper
Air Flow Capacity	Up to 650 m³/h
Number of Speeds	3
Controls Type	Push Button
Lighting Type	LED (2 x 1 Watt)
Voltage	220-240 V ~ 50 Hz
Wattage	200 watts
Energy Efficiency Class	C
Filter Type	Washable Aluminum Grease Filter, Activated Carbon Filter
Product Dimensions (Diameter x Height)	Approx. 35 cm x 60 cm (Hood)
Chimney Cover Dimensions (Diameter x Height)	Approx. 35 cm x 60 cm
Total Height (Hood + Chimney Cover)	99 to 117 cm
Item Weight (Hood / Chimney Cover)	Approx. 9.4 kg / 5.7 kg

WARRANTY AND SUPPORT

For warranty information, please refer to the documentation provided at the time of purchase or contact your retailer. Klarstein products are designed for reliability and performance.

If you require technical assistance, have questions about your product, or need to order replacement parts (e.g., activated carbon filters), please contact Klarstein customer support. You can typically find contact information on the manufacturer's official website or in the original product packaging.

Please have your model number (TK15-BerettaKupfer) and purchase details ready when contacting support.