

POWERTECH

MB4102

1024Wh Power Station



Instruction Manual

CONTENTS

Warnings & Safety Information	3
Before First Use	4
Box Contents	4
Product Diagram.....	5
LCD Screen Description	6
Usage Instructions.....	6
Charging Instructions	8
Other Functions	11
FAQ	12
Error Codes.....	13
Maintenance	15
Specifications.....	15
Warranty Information.....	16

WARNINGS & SAFETY INFORMATION

WARNING: The manufacturer is not responsible for any potential injury from misuse

- Read this user manual carefully before using the product to ensure that you completely understand the product and can correctly use it. After reading this user manual, keep it properly for future reference.
- Improper use of this product may cause serious injury to yourself or others, or cause product damage and property loss. Once you use this product, it is deemed that you understand, approve and accept all the terms and content in this document.
- In compliance with laws and regulations, the Company reserves the right to final interpretation of this document and all documents related to this product. This document is subject to changes updates, revisions, or termination) without prior notice. Please visit the official website to obtain the latest product information.
- No compensation for losses caused by the use of non-standard connectors.


BEFORE FIRST USE

Prior to using your product, please read all the safety and operating instructions thoroughly. Please ensure you follow the steps below before using the product. We recommend you keep the original packaging for storing the product when not in use.


Please pay close attention to the section entitled Warnings & Safety Information. Find a safe and convenient place to keep this instruction manual for future reference.

Unpack the product but keep all packaging materials until you have made sure your new product is undamaged and in good working order. Ensure you have all accessories listed in this manual.


BOX CONTENTS




Power Station




Mains Charging Cable



12V Charging Cable





Solar Charging Cable




User Manual

PRODUCT DIAGRAM

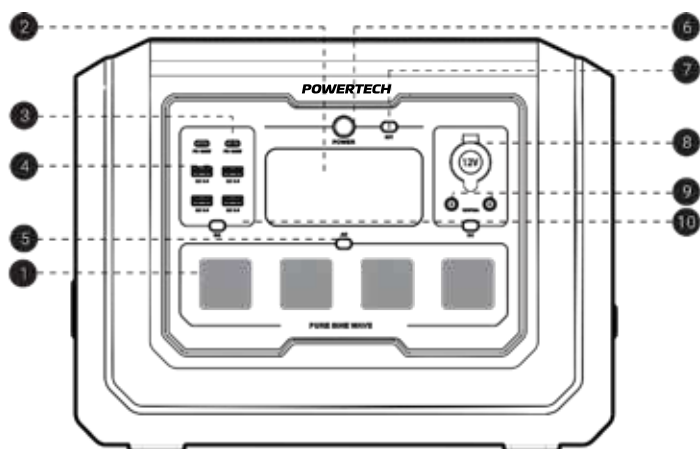

11

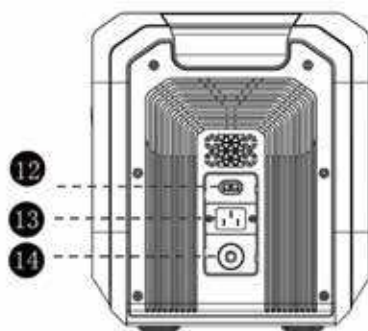

12


13

14

1. AC Outputs
2. LDC Display
3. 100W PD USB-C Outputs
4. QC 3.0 USB-A Outputs
5. AC Output Switch
6. Main Power Switch
7. 12V Cigarette Socket Output

8. DC5521 Outputs
9. DC Output Switch
10. Extended Battery Socket
11. High Current DC Input
12. AC Charging Input
13. Circuit Protection


LCD SCREEN DESCRIPTION

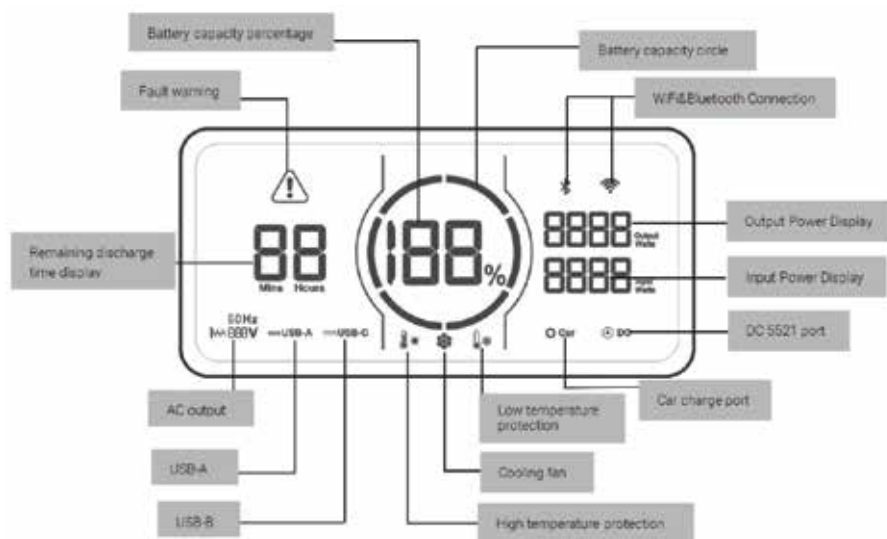

USAGE INSTRUCTIONS

LCD battery capacity circle indicates battery level. The capacity circle is divided into six sections, accounting for approximately 17%~35%~51%~68%~85%~100% of the capacity. When in use, the LCD display automatically wakes up. When discharging, the blue capacity segment disappears from the display, indicating remaining capacity. When charging, the blue battery capacity circle flashes clock-wise along the trajectory, which indicates that the device is currently charging. The number on the right side of the energy circle now displays the real-time input power. After full charging, all blue capacity segments will be illuminated and keep in stable. After charging is completed, please unplug the charger.

Press and hold the power button, the product will turn on, the LCD screen will light up, and the power button indicator light will turn to a steady state; press and hold the power button for about 3 seconds or more, the LCD screen will display the word "off" and then release it, the product will shut down, and the LCD display will turn off. When the main power button is turned on, lightly press the switch button of each functional area, and the corresponding function icons on the LCD screen will light up at the same time. At this time, the functions in this area can be used normally; tap the corresponding functional area button again, and the corresponding LCD screen icons will turn off. This area function stops working.

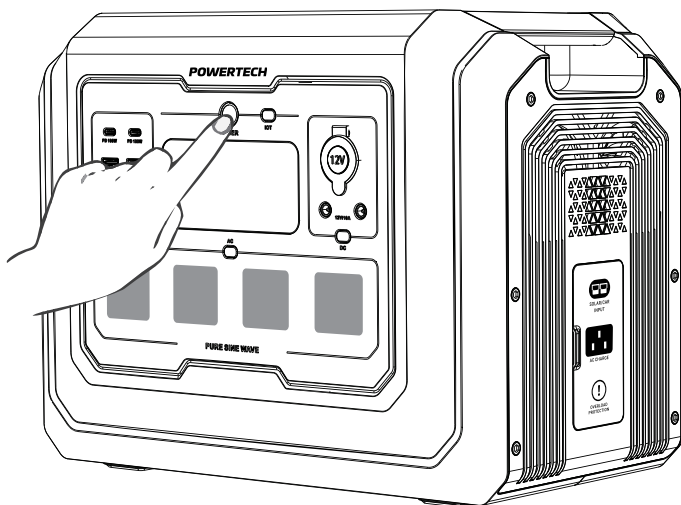


NOTE: After the product is turned on, short press the main power button. The LCD screen will turn off but the product will not shut down. If the product is not operated within 5 minutes, the product will automatically shut down.

NOTE: The default standby time of this product is 6 hours. If other output power keys are not turned on and no load is connected to the product, the product will automatically shut down after 6 hours. If the product is not operated within 5 minutes, the product will enter sleep state and the LCD screen will automatically turn off. When the product has load changes or operations, the LCD screen automatically lights up. The standby time can be set on the APP.

NOTE: In high-temperature environments, it is recommended to use loads below 1600W when the capacity is discharged from 100% to 30%. Otherwise, it may trigger the high-temperature protection of the battery cells.


CHARGING INSTRUCTIONS

AC Charging

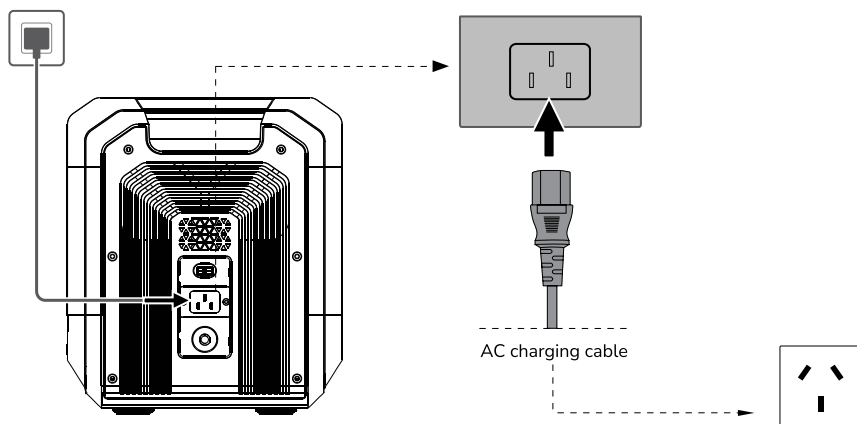

When the AC output of the product is turned off, the switch is in the 'SLOW' position for slow charging with an input power of 700W, and the switch is in the 'Fast' position for fast charging with an input power of 1400W;

NOTE: The product's fast and slow charging function must be turned off when switching.

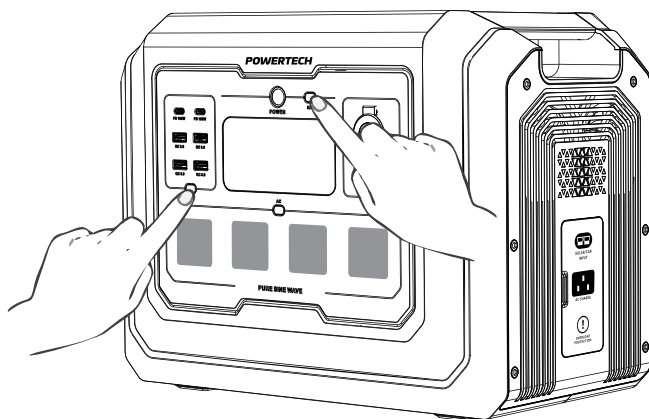


Solar Charging

Use the included solar cable to connect a 12V solar panels to the device. Up to 3 standard solar panels can be connected.

NOTE: When using a suitable solar panel to charge this product, please make the connection according to the user manual specifications.


WARNING: Before connecting the solar panel, please confirm that the output open circuit voltage specification of the solar panel is within 80V to avoid damage to the product.

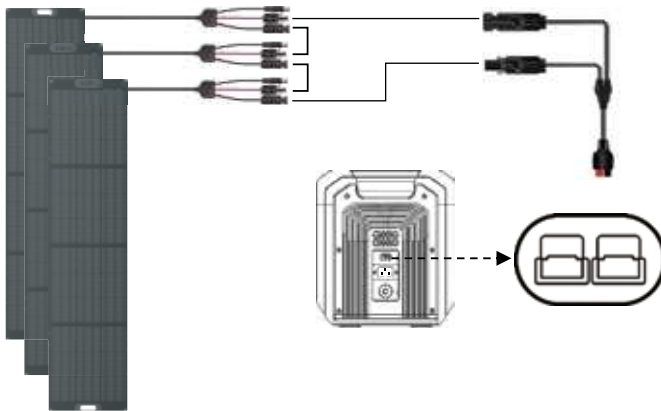

Car Charging


Use the car charger port of your vehicle to charge this. At the same time, ensure that the car charger port and the cigarette lighter of the car charger input cable are in good connection.

NOTE: For protecting the car battery from losing power and unable to start, it is necessary to use the car charger to charge after the car is started.

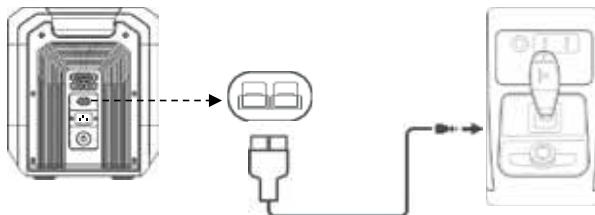

Extended Battery Charging

Up to one extended battery can be connected to this product. Only use the supplied cable to connect the power station and the extended battery, the device will start to charge when a reading appears on the input power on the screen.

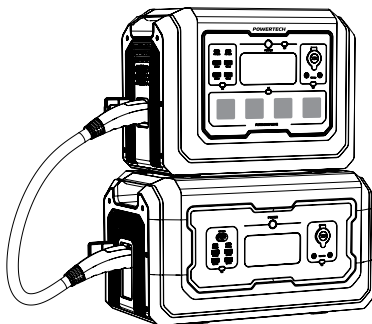

NOTE: Please make sure that both the product and the power pack are turned off Before connecting the extended battery to this product.

NOTE: After this product is connected to the extended battery, make sure that the LCD display of this product shows the input power, before turning on.


WARNING: Do not directly connect or remove the power pack during the charging and discharging process. If you need to connect or remove the power pack when using, please turn off the power before operating.

WARNING: Do not use your hands or other objects to touch the metal terminals at the connection port of the power pack. If there are foreign objects attached to the metal terminals, please lightly wipe with a dry cloth.

WARNING: The device only allows to plug in and unplug the battery pack in the shutdown status:with the device on, to plug or unplug battery packs will trigger the overcurrent protection. If damage under this situation,no warranty allowed.

OTHER FUNCTIONS

Circuit Break Protection Function

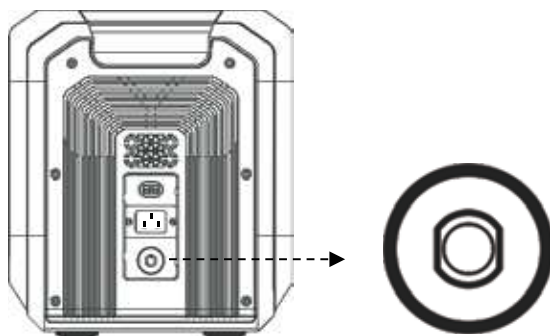

When the AC input current is continuously more than 10A, the device charge input port will protect itself. The AC input overload protector button will pop up automatically. After confirming that the product is not faulty, press the AC input overload protector to reset the circuit breaker.

1. What type of battery does the product use?

This product uses high-quality lithium iron phosphate batteries.

2. What equipment can be connected to the AC output port of the product?

The AC output port of this product has a rated power of 2000W and a peak power of 4500W. It can power most household appliances. However, it is recommended that you confirm the power of the appliance before use and ensure that the sum of the power of all load devices is less than the rated power.

3. How to know how long the product can provide power?

The LCD screen of this product will display the battery life, and devices with stable power consumption can be estimated based on this time.

4. How to tell if the product is charging?

When charging, the LCD screen will display the remaining charging time, and the power indicator circle outside the battery power percentage will begin to rotate in a circular motion, and the input power will be displayed.

5. How to clean this product?

Please use a dry, soft, clean cloth or paper towel to wipe this product.

6. How to store the product?

When storing, please turn off this product first and then store it in a dry, ventilated place at room temperature. Do not place this product near water and fire sources. During long-term storage, it is recommended to charge and discharge the battery every three months to extend the service life of this product.




















7. Can this product be brought on board a plane?












No.

8. Is the actual output capacity of the product consistent with the capacity specified in the user manual?

The capacity indicated in the user manual is the rated capacity of the battery pack of this product. Since this product has a certain efficiency loss during the charging and discharging process, the actual output capacity of the product is lower than the capacity specified in the user manual.

ERROR CODES

FAULT CODE	FAULT INFORMATION	STATUS	REMARKS
E000	AC output short circuit protection	Flashing, no output  	Press the AC output power on/off button for recovery
E001	Output overload protection	Flashing, no output   	Flashing icons indicates which circuit overload. Overload protection needs to be restored manually, UPS function overload 2000W 1 sec.
E002	AC Battery low voltage protection	The corresponding function icon flashes and the corresponding port has no output.	After protection, restart corresponding function keys to restore functions, and recharge it timely
E003	AC output over-voltage and low voltage protection	Flashing, no AC output 	You need to manually press the AC power button to recover
E004	Abnormal AC input frequency	Flashing, no output 	Automatically recover when frequency is normal
E005	High and low bus voltage, over-current	Flashing, no output at all ports 	You need to manually press the AC power button to recover
E006	Inverter over-temperature charging over-temperature protection	Flashing, no output   	Temperature lower down to normal level, it will recover automatically
E010	Overload and short circuit of the cigarette lighter socket	Flashing, no output   	You need to manually press the DC power button to recover
E011	Overload and short circuit of the USB-A port	Flashing, no output at all ports  	You need to manually press the DC power button to recover
E012	Overload and short circuit of the USB-C port	Flashing, no output at all ports  	You need to manually press the DC power button to recover
E016	Overvoltage of the inverter input battery	E016 code +  Flashing	You need to manually press the DC power button to recover

FAULT CODE	FAULT INFORMATION	STATUS	REMARKS
E020	BMS communication failure	Flashing, no output at all ports 	Check BMS communication cable
E021	Battery cell high voltage alarm	E021 code flashing	Set the device aside and wait for the battery voltage to recover automatically
E022	Battery cell low voltage alarm	Battery capacity percentage flashing	Connect the AC charging cable and keep charging until the voltage is normal
E023	Total battery voltage is too high	E23 code flashing but output is normal	Set the device aside and wait for the battery voltage to recover automatically
E024	Total battery voltage is too low	Flashing, no output at all ports 	Connect the AC charging cable and keep charging until the voltage is normal
E025	Battery high temperature	Flashing, no output at all ports  	Automatically resumes after temperature recovery
E026	Battery low temperature	Flashing, no output at all ports  	Automatically resumes after temperature recovery
E027	System overload	Flashing, AC output close, DC output is normal, the AC load is higher than 2100W or AC+DC load is higher than 2100W 	You need to manually press the AC power ON/OFF button to recover
E028	Charging over-temperature	Flashing, charging stop  	Automatically resumes after temperature recovery
E029	MOSFET over-temperature	Flashing, no output at all ports  	Automatically resumes after temperature recovery
E030	Abnormal battery pack connection	Battery pack connection error	Please replace with the standard battery pack

MAINTENANCE

1. Please store the product away from water sources, heat sources, and metal objects.
2. In order to extend the service life of the battery, it is recommended to use or store this product in an environment of 20C to 30°C.
3. If long-term storage is required, please charge and discharge this product once every 3 months (first discharge to 0%, then fully charge, then discharge to 60% for long-term storage); products that have not been charged or discharged for more than 6 months warranty will not be provided.
4. For safety reasons, do not store this product in an environment above 45°C or below -10 C for a long time.
5. If the product is seriously low on power and idle for too long, the product will enter deep sleep mode, and the product must be charged before use again.

SPECIFICATIONS

Model		S01
AC Output	Rated Voltage	230VAC
	Rated Power	2000W
	Peak Power	4500W
	Frequency	50Hz
DC 12V & Car Lighter Output	Rated Voltage	12V
	Rated Current	10A
USB-A Output		5V/3A; 9V/2A; 12V/1.5A [18W Max]
USB-C Output		5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/5A [100W Max]
AC Charge Input		190~250V _{a.c} 6.5A 1400W
Solar Input		12~80V _{d.c} MPPT:18-75V/14A 800W Max
Car Lighter Input		12~15V _{d.c} 8A
Rated Capacity		1024Wh
Rated Voltage		51.2 V _{dc}
Battery Type		LiFePO4
IP Grade		IP21
Working Temperature		0°C~40°C
Dimension		384 x 232 x 295mm
Net Weight		12.6kg

WARRANTY INFORMATION

Our product is guaranteed to be free from manufacturing defects for a period of 12 Months.

If your product becomes defective during this period, Electus Distribution will repair, replace, or refund where a product is faulty; or not fit for intended purpose.

This warranty will not cover modified product; misuse or abuse of the product contrary to user instructions or packaging label; change of mind and normal wear and tear.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and failure does not amount to a major failure.

To claim warranty, please contact the place of purchase. You will need to show receipt or other proof of purchase. Additional information may be required to process your claim.

Any expenses relating to the return of your product to the store will normally have to be paid by you.

The benefits to the customer given by this warranty are in addition to other rights and remedies of the Australian Consumer Law in relation to the goods or services to which this warranty relates.

This warranty is provided by:

Electus Distribution

Address 46 Eastern Creek Drive, Eastern Creek NSW 2766

Ph. 1300 738 555