SUNNY SHOWER Adjustable Frameless Pivot Shower Door 33.5-35 in. W x 72 in. H

SUNNY SHOWER Adjustable Frameless Pivot Shower Door

Model: Adjustable 33.5-35 in. W x 72 in. H

1. Product Overview

The SUNNY SHOWER Adjustable Frameless Pivot Shower Door is designed to provide a modern and functional enclosure for your shower space. This single-panel pivot door features clear tempered glass and a chrome finish, offering both durability and aesthetic appeal. Its reversible design allows for left or right-hand opening, adapting to various bathroom layouts.

Key Features:

- **Frameless Pivot Design:** A single panel pivot shower door with a stainless steel handle, offering a sleek, modern look.
- **Flexible Adjustment:** Aluminum wall profiles allow for a width adjustment range of 33.5 to 35 inches. The pivot mechanism can be adjusted to prevent rubbing and ensure smooth operation.
- **Safety Glass:** Features 1/4 inch (6mm) ANSI Z97.1 certified tempered safety glass, designed for durability and shatter resistance.
- **Waterproof Barrier:** Equipped with a cushioned magnetic seal to reduce noise, ensure a tight closure, and prevent water leakage.
- **Easy Installation:** Designed for straightforward installation, requiring only the fixing of wall profiles and placement of the glass panel.

Your browser does not support the video tag.

Video 1: Overview of the SUNNY SHOWER Pivot Shower Door features, including adjustment and sealing.

2. Setup and Installation

Proper installation is crucial for the functionality and longevity of your shower door. Please read all instructions carefully before beginning. Two people are recommended for installation.

2.1 Pre-Installation Checklist:

- Verify all parts are included as per the packing list.
- Ensure the shower opening dimensions are within the adjustable range of 33.5-35 inches.
- Gather necessary tools: drill, measuring tape, level, screwdriver, silicone sealant, hammer.
- Wear appropriate safety gear, including gloves and eye protection.

2.2 Installation Steps:

1. **Mark Wall Profile Positions:** Position the wall profiles (S10, S01) vertically on the wall according to your model size. Mark the drill hole positions, ensuring they are not too close to tile edges.
2. **Drill Holes:** Drill holes at the marked positions using a 6mm (0.2362 inch) drill bit. Insert wall anchors (S02) into the drilled holes.
3. **Attach Wall Profiles:** Secure the wall profiles to the wall using screws (S03) and then apply screw covers. Repeat for both sides.

4. **Insert Fixed Panels:** Carefully insert the fixed glass panel into the wall profile. Insert the other wall profile (S09) onto the other side of the fixed panel. The distance between wall profiles can be adjusted to fit your needs.
5. **Secure Fixed Panels:** Secure the fixed panels with wall profiles using screws (S04, S05), then put on the decorative covers.
6. **Install Water Retaining Strips:** Install the bottom water retaining strip (S12) along the base of the shower door. Install the magnetic water retaining strips (S07, S08) on the door edges.
7. **Install Handles:** Install the handles (S11) on the moving glass panels.
8. **Apply Sealant:** Apply silicone sealant to the outside edges of the profiles to ensure a watertight seal. Allow at least 24 hours for the sealant to dry completely before use.

Your browser does not support the video tag.

Video 2: Detailed installation guide for the SUNNY SHOWER Semi-frameless shower door.



Image 1: Reversible installation for left or right opening.



Image 2: Width adjustment mechanism, allowing up to 0.75 inches on each side.

3. Operating Instructions

The pivot shower door is designed for smooth and quiet operation.

- To open the door, gently pull the stainless steel handle outwards.
- To close the door, push the handle inwards until the magnetic seal engages with the wall profile, ensuring a secure and watertight closure.



Image 3: Stainless steel handle for easy opening and closing.

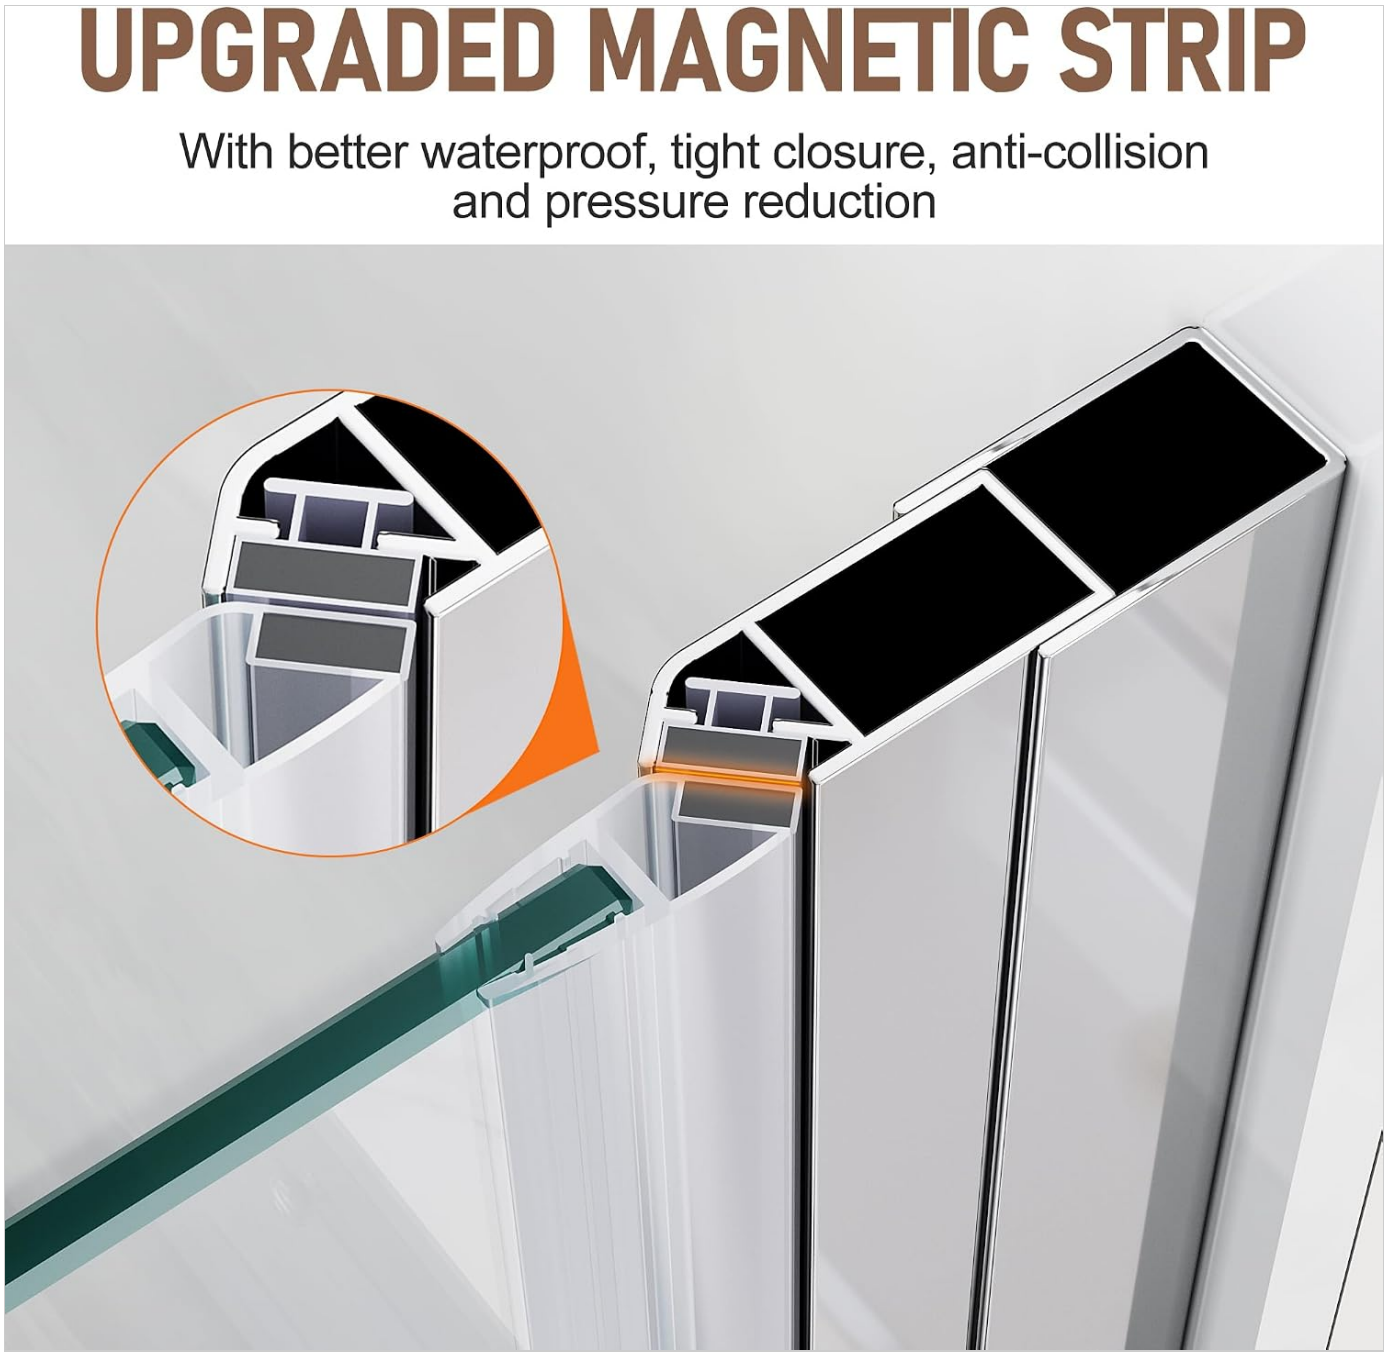


Image 4: Upgraded magnetic strip for better waterproof, tight closure, and anti-collision.

4. Maintenance

Regular maintenance will keep your shower door looking new and functioning properly.

- **Glass Cleaning:** Clean the tempered glass regularly with a soft cloth and a non-abrasive glass cleaner. Avoid harsh chemicals or abrasive pads that can scratch the glass or damage the finish.
- **Hardware Cleaning:** Wipe down chrome finish hardware with a soft, damp cloth. Do not use abrasive cleaners.
- **Seal Inspection:** Periodically check the magnetic and bottom water retaining strips for wear or damage. Replace if necessary to maintain a watertight seal.
- **Pivot Mechanism:** Ensure the pivot mechanism operates smoothly. If it becomes stiff, apply a small amount of silicone-based lubricant.

5. Troubleshooting

If you encounter any issues with your shower door, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Water leakage from door edges	Magnetic seal not fully engaged or damaged; silicone sealant not properly applied or worn.	Ensure the door closes completely and the magnetic strip aligns. Inspect the magnetic seal for damage and replace if necessary. Reapply silicone sealant to the outside edges of the profiles if gaps are present.
Door not closing smoothly or rubbing	Pivot mechanism misalignment or debris; door not level.	Check the pivot mechanism for any obstructions. Adjust the pivot as described in the installation section to raise or lower the door slightly. Ensure the wall profiles are installed level.
Door feels loose or wobbly	Screws securing wall profiles or fixed panels are loose.	Carefully tighten all screws securing the wall profiles and fixed panels. Do not overtighten.

6. Specifications

Feature	Detail
Brand	SUNNY SHOWER
Model	Adjustable Frameless Pivot Shower Door
Size	34" W x 72" H (Adjustable width: 33.5"-35")
Product Dimensions	0.2 x 34 x 72 inches
Color	Chrome Finish
Material	Stainless Steel, Tempered Glass
Glass Thickness	1/4 inch (6mm)
Glass Certification	ANSI Z97.1 Certified
Item Weight	52.8 pounds (24 Kilograms)
Assembly Required	Yes
Installation Method	Freestanding

7. Warranty Information

This product comes with a standard manufacturer's warranty against defects in materials and workmanship. Please refer to the product packaging or contact customer support for specific warranty terms and conditions.

8. Customer Support

For any questions, assistance with installation, or troubleshooting, please contact SUNNY SHOWER customer support. Contact details can typically be found on the product packaging or the manufacturer's official website.

© 2023 SUNNY SHOWER. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question