



AC output side



DC input side



IEC62368-1 BS EN/EN62368-1



UL62368-1



TPTC004



AS/NZS 62368.1



Features

- Combining AC/DC charger, DC/AC Inverter, AC by-pass & support external MPPT solar charger
- AC utility charger up to 4520W
- UPS function (AC by-pass) without interruption, transfer time <10ms
- True sine wave output (THD<3%)
- High surge power up to 10KW
- Parallel synchroized operation up to 30KW (5+1 unit)
- Temperature controlled cooling fan
- AC output voltage and frequency selectable by DIP S.W
- Protections :
Input : Reverse polarity / DC low alarm / DC low shutdown / Over voltage
Output : Short circuit / Overload / Over temp.
- Battery over discharge protection (low voltage disconnect)
- 30°C ~+70°C wide operating temperature
- Suitable for lead-acid or li-ion batteries
- Support MODBus-RTU(RS-485) or CANBus protocol communication
- Graphical user interface controller CMU2E/CMU2E-R for status monitoring and control
- Conformal coating
- 5 years warranty

Applications

- Home and office appliance
- Power tools
- Portable equipment
- Vehicle
- Yacht
- Off-grid solar power system
- Wireless network
- Telecom or datacom system

GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

Description

NTN-5K is a 5KW highly reliable off-grid true sine wave DC-AC power inverter with built-in AC charger and UPS function(AC by-pass). Its key features include: digital design with MCU control, streamlined control circuitry that quickly responds to environmental changes and improves reliability, high quality fan with low acoustic noise, 10KW peak power, adjustable AC output voltage and frequency, -30~+70°C wide. Operating temperature range, complete protection features, and etc. Combined with batteries, the NTN-5K is suitable for use in residential, commercial, marine, automobile, mine, construction site, and remote areas with no access to utility power, and the output can be used to power fans, TV, radio, phone charger, PC/laptop, lighting, induction stove, air conditioner, electromechanical tool, communication equipment, power distribution cabinet, outdoor camping equipment, marine AC power, factory equipment, and etc.

Model Encoding

NTN - 5K - 2 24

Communication protocol option

DC input voltage (24: 24Vdc, 48: 48Vdc, 380: 380Vdc)

AC output voltage (1:100/110/115/120Vac, 2:200/220/230/240Vac)

Rated wattage

Series name

Type	Communication Protocol	Note
Blank	MODBus protocol	In Stock
CAN	CANBus protocol	In Stock



5KW True Sine Wave Inverter with AC Charger / UPS

NTN-5K series

SPECIFICATION



MODEL NO.		NTN-5K-224 ☐		NTN-5K-248 ☐		NTN-5K-2380 ☐				
		☐ =Blank, CAN								
AC OUTPUT	RATED POWER(Continuous)		5000W							
	OVER RATED POWER(3 Min.)		5750W							
	PEAK POWER(10 Sec.)		7000W		7500W					
	SURGE POWER(30 Cycles)		8000W		10000W					
	AC VOLTAGE		Default setting set at 230VAC 200 / 220 / 230 / 240Vac selectable by DIP S.W							
	FREQUENCY		Default setting set at 50 ± 0.1Hz 50/60Hz selectable by DIP S.W							
WAVEFORM (Note. 1)		True sine wave (THD<3%)								
AC REGULATION		± 3.0% at rated input voltage								
DC INPUT	DC VOLTAGE		24Vdc		48Vdc		380Vdc			
	VOLTAGE RANGE (Typ.)		19 ~ 33Vdc		38 ~ 66Vdc		280 ~ 430Vdc			
	DC CURRENT (Typ.)		240A		120A		16A			
	NO LOAD DISSIPATION (Typ.)	NON-SAVING MODE	2.5A		1.4A		0.2A			
		SAVING MODE (Note. 5)	Default disable, auto detect AC output load ≤ 10W will be changed to saving mode <25W							
	POWER OFF CURRENT DRAW		≤ 2mA							
	EFFICIENCY (Typ.) (Note. 1)		91%		93%		94.5%			
BATTERY TYPES		Lead Acid or li-ion								
PROTECTION	DC INPUT	ALARM	22 ± 0.5Vdc		44 ± 1Vdc		300 ± 5Vdc			
			SHUTDOWN	19 ± 0.5Vdc		38 ± 1Vdc		280 ± 5Vdc		
				RESTART	25 ± 0.5Vdc		50 ± 1Vdc		335 ± 5Vdc	
		ALARM			31 ± 0.5Vdc		62 ± 1Vdc		420 ± 5Vdc	
			SHUTDOWN		33 ± 0.5Vdc		66 ± 1Vdc		430 ± 5Vdc	
				RESTART	30 ± 0.5Vdc		60 ± 1Vdc		400 ± 5Vdc	
	REVERSE POLARITY				No damage, re-power on to recover after fault condition is removed					By internal fuse open
	AC OUTPUT	OVER TEMPERATURE			Shut down o/p voltage, recovers automatically after temperature goes down					
		OUTPUT SHORT		Shut down o/p voltage, re-power on to recover						
		OVER LOAD (Typ.)		105 ~ 115% load for 180 sec., 115% ~ 140% load for 10 sec.		105 ~ 115% load for 180 sec., 115% ~ 150% load for 10 sec.				
		Protection type : Shut down o/p voltage, re-power on to recover								
CIRCUIT BREAKER		35A								
FUNCTION		REMOTE CONTROL						Set remote ON/OFF control by front panel dry contact connector(by RELAY), Open : AC output OFF ; Short : AC output ON		
		COMMUNICATION						MODBus-RTU (RS-485) / CANBus		
AC UPS MODE	AC INPUT RANGE		200/220/230/240Vac ± 16%, recover ± 13%							
	FREQUENCY RANGE		45 ~ 65Hz							
	TRASFER TIME(Typ.)		10ms inverter → AC by pass							
AC CHARGER	BOOST CHARGE VOLTAGE		Default 28.8Vdc		Default 57.6Vdc		Default 400Vdc			
	FLOAT CHARGE VOLTAGE		Default 27.6Vdc		Default 55.2Vdc		Default 385Vdc			
	CHARGE VOLTAGE RANGE		20 ~ 30Vdc		40 ~ 60Vdc		290 ~ 400Vdc			
	CONSTANT CURRENT		135A		70A		11.3A			
	MAX. CHARGE POWER		4050W		4200W		4520W			
	TEMPERATURE COMPENSATION		By external NTC							
	POWER FACTOR (Typ.)		PF>0.98/230VAC at full load							
	EFFICIENCY (Typ.)		91%		93%		94%			
	AC CURRENT (Typ.)		25A/230VAC							
	INRUSH CURRENT (Typ.)		50A/230VAC							
ENVIRONMENT	LEAKAGE CURRENT(Peak)		4.7mA/264VAC							
	WORKING TEMP.		-30 ~ +70℃ (Refer to "Derating curve")							
	WORKING HUMIDITY		20% ~ 90% RH non-condensing							
	STORAGE TEMP., HUMIDITY		-30 ~ +70℃ / -22 ~ +158°F, 10 ~ 95% RH non-condensing							
	VIBRATION		10 ~ 500Hz, 3G 10min./1cycle, 60min. each along X, Y, Z axes							
SAFETY & EMC (Note.4)	SAFETY STANDARDS		CB IEC62368-1, UL62368-1, CSA C22.2 No. 62368-1, TUV BS EN/EN62368-1, AS/NZS 62368.1, EAC TP TC 004 approved							
	WITHSTAND VOLTAGE (Note. 6)		DC I/P - AC:3.0KVAC AC - FG:1.5KVAC							
	ISOLATION RESISTANCE (Note. 6)		DC I/P - AC O/P, DC I/P - FG, AC O/P - FG: 100M ohms / 500VDC / 25℃ / 70% RH							
	EMC EMISSION	Parameter		Standard		Test Level / Note				
		Radiated		BS EN/EN55032(CISPR32), FCC		Class A				
		Conducted		BS EN/EN55032(CISPR32), FCC		Class A				
		Harmonic Current		BS EN/EN61000-3-12		Class A				
		Voltage Flicker		BS EN/EN61000-3-11		-----				
	EMC IMMUNITY			BS EN/EN55035, EN61000-6-2						
		Parameter		Standard		Test Level / Note				
ESD		BS EN/EN61000-4-2		Level 3, 8KV air ; Level 2, 4KV contact						
Radiated		BS EN/EN61000-4-3		Level 3						
EFT / Burst		BS EN/EN61000-4-4		Level 3						
Surge		BS EN/EN61000-4-5		Level 4, 2KV/Line-Line 4KV/Line-Earth						
Conducted		BS EN/EN61000-4-6		Level 3						
Magnetic Field		BS EN/EN61000-4-8		Level 4						
Voltage Dips and Interruptions		BS EN/EN61000-4-34		>95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods						
OTHERS	MTBF		200.9K hrs min. Telcordia TR/SR-332 (Bellcore) ; 17.8K hrs min. MIL-HDBK-217F (25℃)							
	DIMENSION		460*211*83.5mm (L*W*H)							
	PACKING		10.5Kg; 1pcs/ 10.5Kg/ 1.25CUFT							
NOTE		1.Efficiency, AC regulation and THD are tested by 75% load, linear load at 25Vdc/50Vdc/400Vdc input voltage. 2.All parameters not specified above are measured at 25Vdc/50Vdc/400Vdc input and 25℃ of ambient temperature and set to factory setting. 3.The tolerance of each voltage value by models is: 224 → ± 0.5V; 248 → ± 1V; 2380 → ± 5V. 4.The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf) 5.Saving mode only activates when the unit is used independently and the RPL switch is in the ON position. 6.During withstand voltage and isolation resistance testing, the screw "A" shall be temporarily removed, and shall be installed back after the testing. ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx								



5KW True Sine Wave Inverter with AC Charger / UPS



NTN-5K series



SPECIFICATION

MODEL NO.			NTN-5K-124 ☐		NTN-5K-148 ☐		
			☐ =Blank, CAN				
AC OUTPUT	RATED POWER(Continuous)		4000W				
	OVER RATED POWER(3 Min.)		4600W				
	PEAK POWER(10 Sec.)		5600W		6000W		
	SURGE POWER(30 Cycles)		7000W		8000W		
	AC VOLTAGE		Default setting set at 110VAC 100 / 110 / 115 / 120Vac selectable by DIP S.W				
	FREQUENCY		Default setting set at 60±0.1Hz 50/60Hz selectable by DIP S.W				
	WAVEFORM (Note. 1)		True sine wave (THD<3%)				
	AC REGULATION		±3.0% at rated input voltage				
DC INPUT	DC VOLTAGE		24Vdc		48Vdc		
	VOLTAGE RANGE (Typ.)		19 ~ 33Vdc		38 ~ 66Vdc		
	DC CURRENT (Typ.)		200A		100A		
	NO LOAD DISSIPATION (Typ.)	NON-SAVING MODE	2.5A		1.4A		
		SAVING MODE (Note. 5)	Default disable, auto detect AC output load ≤ 10W will be changed to saving mode <25W				
	POWER OFF CURRENT DRAW		≤2mA				
	EFFICIENCY (Typ.) (Note. 1)		89%		91%		
BATTERY TYPES		Lead Acid or li-ion					
PROTECTION	DC INPUT	LOW	ALARM	22±0.5Vdc		44±1Vdc	
			SHUTDOWN	19±0.5Vdc		38±1Vdc	
			RESTART	25±0.5Vdc		50±1Vdc	
		HIGH	ALARM	31±0.5Vdc		62±1Vdc	
			SHUTDOWN	33±0.5Vdc		66±1Vdc	
			RESTART	30±0.5Vdc		60±1Vdc	
	REVERSE POLARITY		No damage, re-power on to recover after fault condition is removed				
	AC OUTPUT	OVER TEMPERATURE		Shut down o/p voltage, recovers automatically after temperature goes down			
		OUTPUT SHORT		Shut down o/p voltage, re-power on to recover			
		OVER LOAD (Typ.)		105 ~ 115% load for 180 sec., 115% ~ 150% load for 10 sec. Protection type : Shut down o/p voltage, re-power on to recover			
		CIRCUIT BREAKER		50A			
FUNCTION	REMOTE CONTROL		Set remote ON/OFF control by front panel dry contact connector(by RELAY), Open : AC output OFF ; Short : AC output ON				
	COMMUNICATION		MODBus-RTU (RS-485) / CANBus				
AC UPS MODE	AC INPUT RANGE		100/110/115/120Vac±16%, recover±13%				
	FREQUENCY RANGE		45 ~ 65Hz				
	TRASFER TIME(Typ.)		10ms inverter → AC by pass				
AC CHARGER	BOOST CHARGE VOLTAGE		Default 28.8Vdc		Default 57.6Vdc		
	FLOAT CHARGE VOLTAGE		Default 27.6Vdc		Default 55.2Vdc		
	CHARGE VOLTAGE RANGE		20 ~ 30Vdc		40 ~ 60Vdc		
	CONSTANT CURRENT		120A		60A		
	MAX. CHARGE POWER		3600W		3600W		
	TEMPERATURE COMPENSATION		By external NTC				
	POWER FACTOR (Typ.)		PF>0.98/115VAC at full load				
	EFFICIENCY (Typ.)		89%		91%		
	AC CURRENT (Typ.)		20A/110VAC				
	INRUSH CURRENT (Typ.)		25A/110VAC				
LEAKAGE CURRENT(Peak)		4.7mA/264VAC					
ENVIRONMENT	WORKING TEMP.		-30 ~ +70℃ (Refer to "Derating curve")				
	WORKING HUMIDITY		20% ~ 90% RH non-condensing				
	STORAGE TEMP., HUMIDITY		-30 ~ +70℃ / -22 ~ +158°F, 10 ~ 95% RH non-condensing				
	VIBRATION		10 ~ 500Hz, 3G 10min./1cycle, 60min. each along X, Y, Z axes				
SAFETY & EMC (Note.4)	SAFETY STANDARDS		CB IEC62368-1, UL62368-1, CSA C22.2 No. 62368-1, TUV BS EN/EN62368-1, EAC TP TC 004 approved				
	WITHSTAND VOLTAGE		DC I/P - AC:3.0KVAC AC - FG:1.5KVAC				
	ISOLATION RESISTANCE		DC I/P - AC O/P, DC I/P - FG, AC O/P - FG: 100M ohms / 500VDC / 25℃ / 70% RH				
	EMC EMISSION	Parameter	Standard		Test Level / Note		
		Radiated	FCC		Class A		
OTHERS	MTBF	200.9K hrs min. Telcordia TR/SR-332 (Bellcore) ; 17.8K hrs min.		MIL-HDBK-217F (25℃)			
		DIMENSION		460*211*83.5mm (L*W*H)			
		PACKING		10.5Kg; 1pcs/ 10.5Kg/ 1.25CUFT			
NOTE		1.Efficiency, AC regulation and THD are tested by 75% load, linear load at 25Vdc/50Vdc input voltage. 2.All parameters not specified above are measured at 25Vdc/50Vdc input and 25℃ of ambient temperature and set to factory setting. 3.The tolerance of each voltage value by models is: 124→±0.5V; 148→±1V. 4.The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf) 5.Saving mode only activates when the unit is used independently and the RPL switch is in the ON position. ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx					


DERATING CURVE

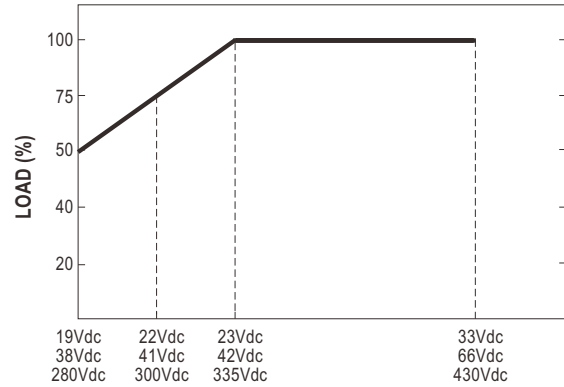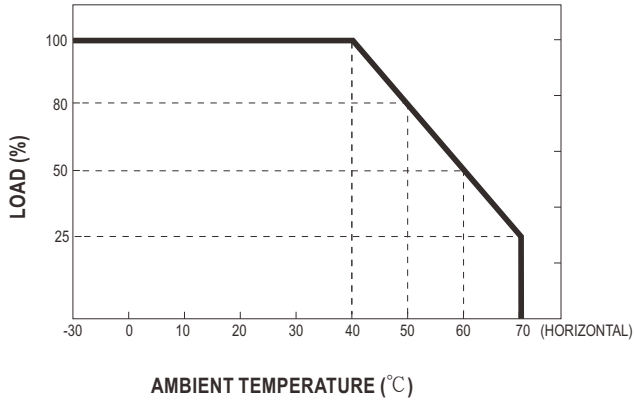

CHARGING CURVE

☉ Default 3 stage charging curve

3 Stage

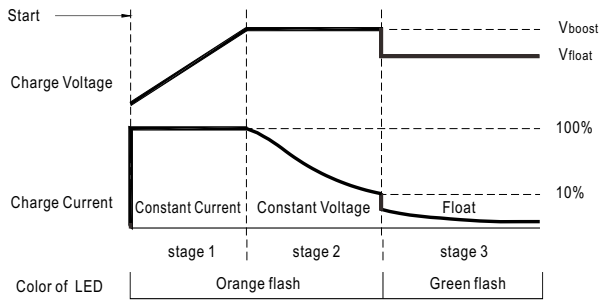


☉ Embedded 3 stage charging curves

MODEL	Vboost	Vfloat	C.C	Adjustable by MODBus / CANBus
124	Default 28.8Vdc	27.6Vdc	120A max.	20~30Vdc
224			135A max.	
148	Default 57.6Vdc	55.2Vdc	60A max.	40~60Vdc
248			70A max.	
380Vdc	Default 400Vdc	385Vdc	11.3A max.	290~400Vdc

☉ Suitable for lead-acid batteries (flooded, Gel and AGM) or li-ion

BLOCK DIAGRAM

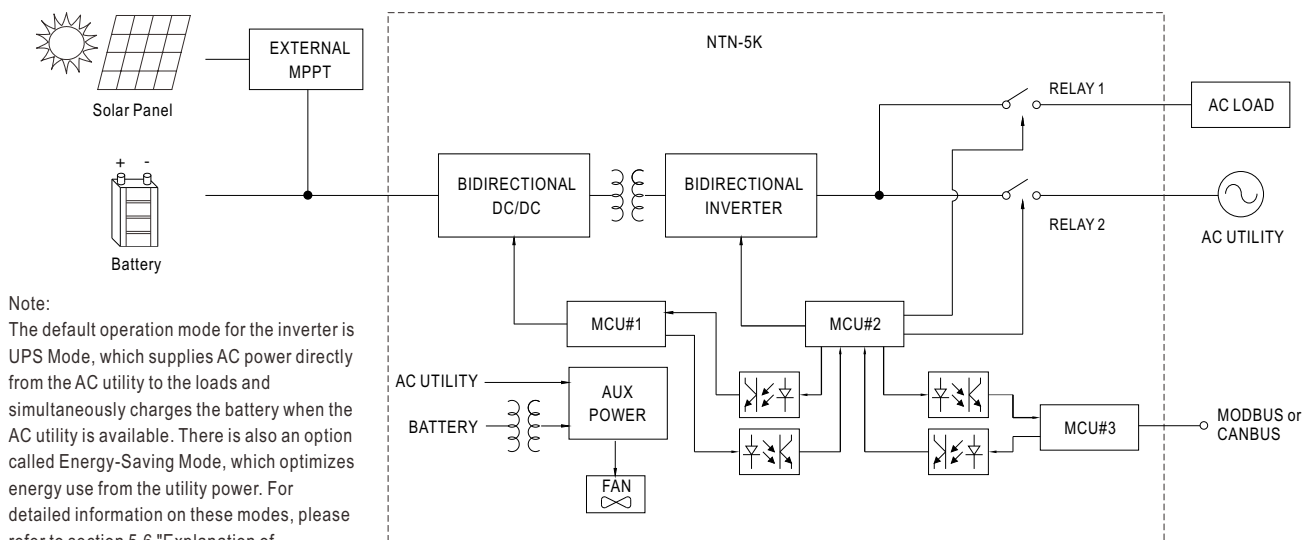


Note:

The default operation mode for the inverter is UPS Mode, which supplies AC power directly from the AC utility to the loads and simultaneously charges the battery when the AC utility is available. There is also an option called Energy-Saving Mode, which optimizes energy use from the utility power. For detailed information on these modes, please refer to section 5.6 "Explanation of Operating Logic" in the manual.

■ Function Manual

1.Support MODBus / CANBus Communication

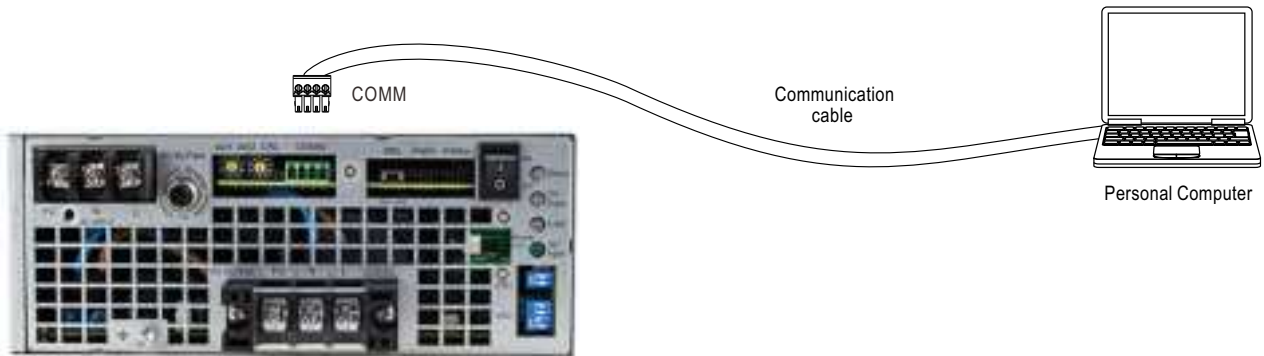

※ Please refer to the user manual for detailed instructions.

2.Remote ON/OFF Control

PAR1/PAR2	Remote ON/OFF	AC Output Status
Pin1:3	Short	AC output ON
Pin1:3	Open	AC output OFF

3.AC Output Voltage、Frequency、Power saving mode selectable by DIP SW



AC Output Voltage、Frequency、Power saving mode selectable by DIP SW

S1	S2	S3	S4
OFF	OFF : 100Vac or 200Vac	ON : 50Hz	ON : Saving mode
OFF	ON : 110Vac or 220Vac		
ON	OFF : 115Vac or 230Vac	OFF: 60Hz	OFF: Non-Saving mode
ON	ON : 120Vac or 240Vac		

4.3Ø 4W and 1Ø 3W AC output Voltage connection selectable by DIP SW



◎3Ø 4-wire / Y

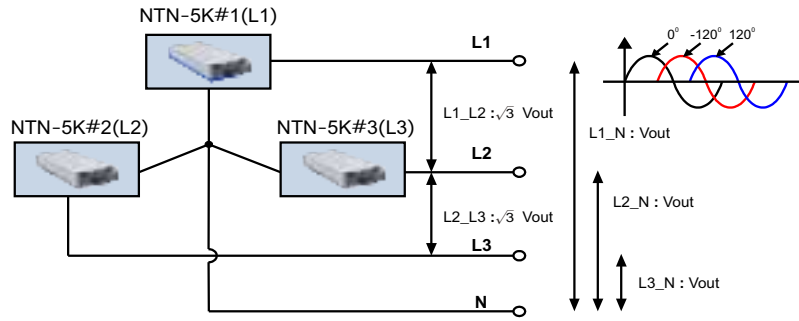


Fig 4.1

S1	S2	AC output phase
OFF	OFF	L1, 0°
OFF	ON	L2, -120°
ON	OFF	L3, +120°

Note: Please refer to 5.3 Three-phase 4-wire output on page 23 of the user manual for detailed instructions.

◎1Ø 3-wire(Split phase system only supports 124 and 148)

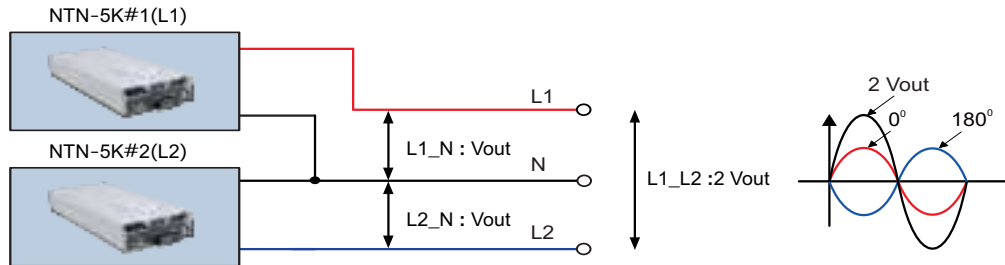


Fig 4.2

S1	S2	AC output phase
OFF	OFF	L1, 0°
ON	ON	L2, +180°

Note: Please refer to 5.4 Single-phase 3-wire Output on page 27 of the user manual for detailed instructions.

5.Temperature compensation(3 stage only)

Temperature compensation function to prolong battery life for lead-acid batteries. Temperature compensation range is 0 ~ 40°C.

The battery temperature sensor comes along with the charger can be connected to the unit to allow temperature compensation of the charging voltage.

If the sensor is not used, the charger works normally.



6.AC Output Parallel Function

NTN-5K has the built-in active current sharing function and can be connected in parallel, up to 6 units, to provide higher AC output power as exhibited below :

※ The inverter should be paralleled using short and large diameter wiring and then connected to the load.

※ The total output current must not exceed the value determined by the following equation:

Maximum output current at parallel operation = (Rated current per unit) x (Number of unit) x 95% ; when parallel unit less than 6.

※ PAR1/PAR2, PRL Function pin connection

Parallel	PSU1		PSU2		PSU3		PSU4		PSU5		PSU6	
	PAR1	PRL	PAR1	PRL	PAR1	PRL	PAR1	PRL	PAR1	PRL	PAR1	PRL
1 unit	X	ON	—	—	—	—	—	—	—	—	—	—
2 unit	V	ON	V	ON	—	—	—	—	—	—	—	—
3 unit	V	ON	V	OFF	V	ON	—	—	—	—	—	—
4 unit	V	ON	V	OFF	V	OFF	V	ON	—	—	—	—
5 unit	V	ON	V	OFF	V	OFF	V	OFF	V	ON	—	—
6 unit	V	ON	V	OFF	V	OFF	V	OFF	V	OFF	V	ON


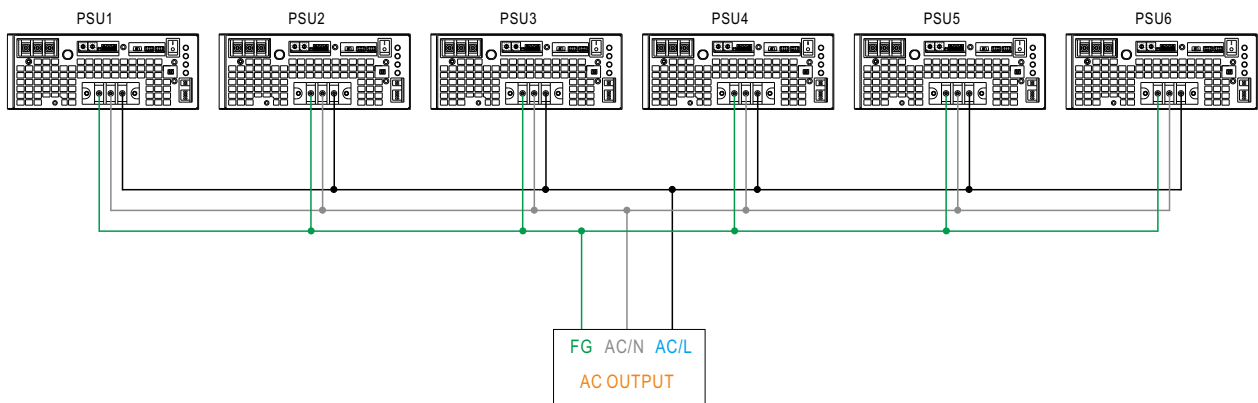


Fig 6.1

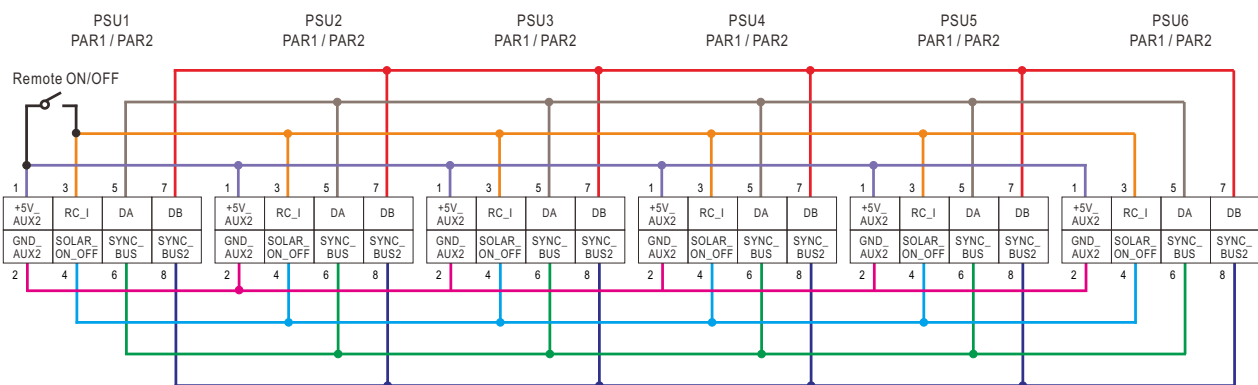

If the lines of PAR1 / PAR2 are too long, they should be twisted in pairs to avoid the noise.

LED STATUS

Normal work:

	Green	Orange	Red
Status	Inverter OK System check	Remote off Saving mode	Abnormal Status (See below table)

	Green	Orange	Red
DC Input	25~31Vdc 50~62Vdc 335~420Vdc Maintain	22~25Vdc 44~50Vdc 300~335Vdc Charging	<22Vdc or >31Vdc <44Vdc or >62Vdc <300Vdc or >420Vdc

Load	Green	Orange	Red
Inverter Mode	<40% load	40~80% load	>80% load
Bypass Mode	<40% load	40~80% load	>80% load

	Green	-----	-----
AC Input	Utility OK Utility error Utility disconnected	-----	-----


Abnormal status :

LED Indicator	Abnormal Indication
Status DC Input Load	Output overload or AC output short circuit
Status DC Input Load	Abnormal DC voltage
Status DC Input Load	Over temperature or Fan lock
Status DC Input Load	Inverter fail

- Light
- Light off
- Flash


Case No.223

MECHANICAL SPECIFICATION

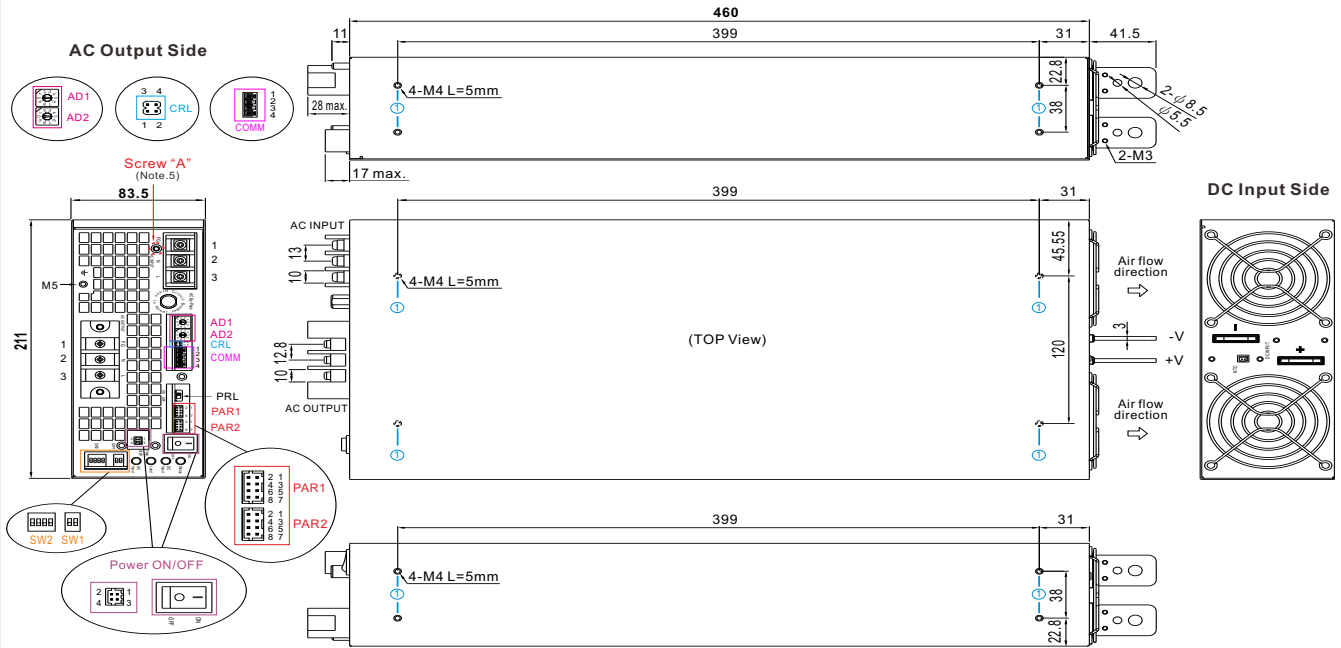(Unit: mm , tolerance $\pm 0.5\text{mm}$)

※ Mounting Instruction

Hole No.	Recommended Screw Size	MAX. Penetration Depth L	Recommended mounting torque
①	M4	5mm	7~10Kgf-cm

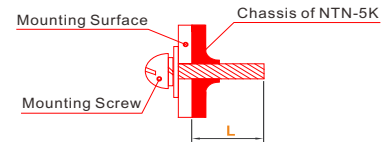

※ Terminal Pin No. Assignment

Pin No.	Assignment	AC input	AC output	Maximum mounting torque
1	FG	1 2 3	1 2 3	18Kgf-cm
2	AC/N			
3	AC/L			

※ AC IN Connector Pin No. Assignment (COMM):

Pin No.	Function	Description
1	GND-AUX	Auxiliary voltage output GND.
2	D+/CANH	For MODBus model: Data line used in MODBus interface.(Note) For CANBus model: Data line used in CANBus interface.(Note)
3	D-/CANL	For MODBus model: Data line used in MODBus interface.(Note) For CANBus model: Data line used in CANBus interface.(Note)
4	+5V_AUX	Auxiliary voltage output, 4.5~5.5V, referenced to GND_AUX2 (pin1)

Note: Isolated signal, referenced to GND_AUX2

※ Control Pin No. Assignment (CRL):

Pin No.	Function	Description
1,3	RL	Short: Termination resistors(120Ω) For MODBus/CANBus communication, please use Jumper (pin1,3)
2,4	NC	No need to communicate, please use Jumper (pin2,4)

※ AD1,AD2 switch for MODBus/CANBus interface address setting, please refer to the user manual for more details

※ Control Pin No. Assignment (Power ON/OFF) : HRS DF11-04DP-2DS or equivalent

Pin No.	Function	Description
1,2,3,4	Power ON/OFF	The unit can be completely turned ON/OFF by dry contact between Pin 1,2 & 3,4 Power ON : Short Pin1 to 2 and Pin3 to 4 ; Power OFF : Pin1 ~ Pin4 open.




※ Control Pin No. Assignment (PAR1,PAR2) : HRS DF11-08DP-2DS or equivalent

Pin No.	Function	Description
1	+5V_AUX2	Auxiliary voltage output, 4.5~5.5V, referenced to GND_AUX2 (pin2). (Only for REMOTE ON-OFF)
2	GND_AUX2	Auxiliary voltage output GND_AUX2 (pin2).
3	REMOTE ON/OFF	The AC output of the unit can be turned ON/OFF by dry contact between Remote ON/OFF and +5V_AUX2. (Note) Short : AC output ON ; Open : AC output OFF
4	SOLAR_ON_OFF	External MPPT charger control, referenced to GND_AUX2 (pin2).
5	DA	Data line used for parallel control.
6	SYNC_BUS	Signal for parallel operation.
7	DB	Data line used for parallel control.
8	SYNC_BUS2	Signal for parallel operation.





Note: Isolated signal, referenced to GND_AUX2

■ Accessory List



※ NTC Sensor mating along with NTN-5K (Standard accessory)

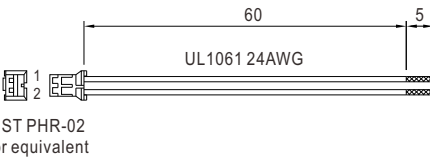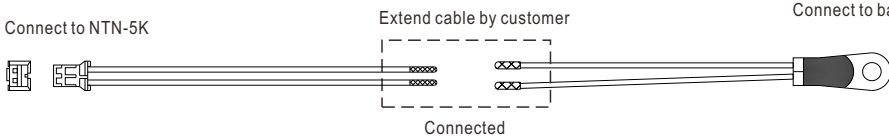
Item		Quantity
①	NTC sensor wire  	1
②	NTC mating wire  	1
Connection Diagram 		

※ Power ON/OFF mating along with NTN-5K (Standard accessory)

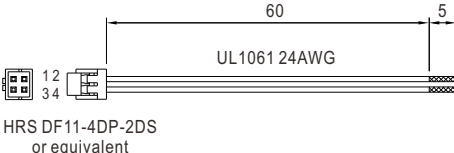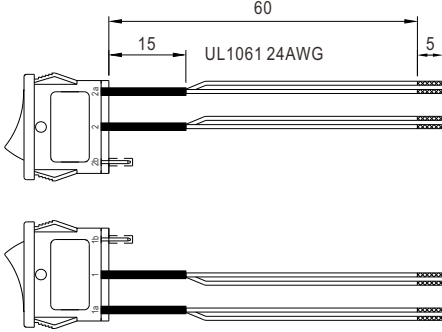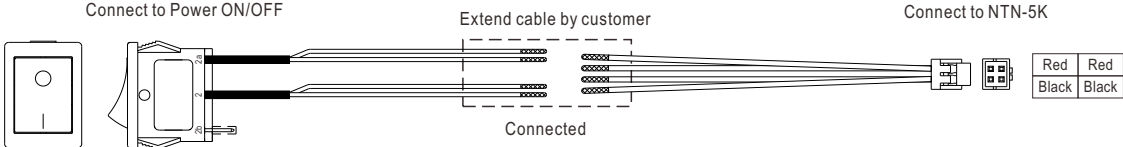Item		Quantity								
①	Power ON/OFF mating wire  <table border="1" data-bbox="671 1323 764 1413"><tr><td>1</td><td>Red</td></tr><tr><td>2</td><td>Red</td></tr><tr><td>3</td><td>Black</td></tr><tr><td>4</td><td>Black</td></tr></table>  12 34 UL1061 24AWG 60 5 HRS DF11-4DP-2DS or equivalent	1	Red	2	Red	3	Black	4	Black	1
1	Red									
2	Red									
3	Black									
4	Black									
②	Power ON/OFF mating wire    1 2 1a 2a UL1061 24AWG 60 15 5 <table border="1" data-bbox="686 1727 778 1816"><tr><td>1</td><td>Red</td></tr><tr><td>1a</td><td>Red</td></tr><tr><td>2</td><td>Black</td></tr><tr><td>2a</td><td>Black</td></tr></table>	1	Red	1a	Red	2	Black	2a	Black	1
1	Red									
1a	Red									
2	Black									
2a	Black									
Connection Diagram										
 Connect to Power ON/OFF Extend cable by customer Connected Connect to NTN-5K <table border="1" data-bbox="1257 1991 1347 2036"><tr><td>Red</td><td>Red</td></tr><tr><td>Black</td><td>Black</td></tr></table>			Red	Red	Black	Black				
Red	Red									
Black	Black									

※ Terminal protector mating along with NTN-5K (Standard accessory)


Item			Quantity
①		 	1
②			1
③			4

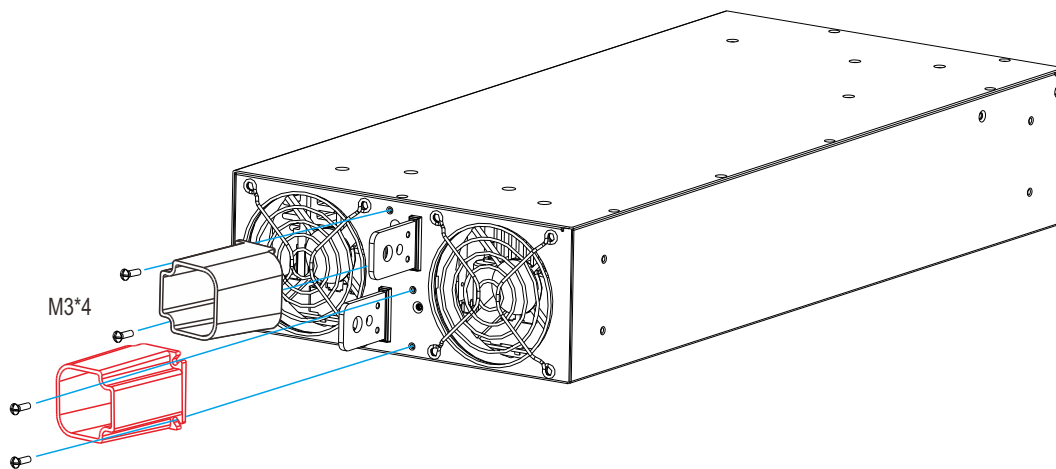


■ TYPICAL APPLICATION



- ① Battery Bank
- ② Off-Grid DC/AC Inverter (NTN series)
- ③ AC Outlet

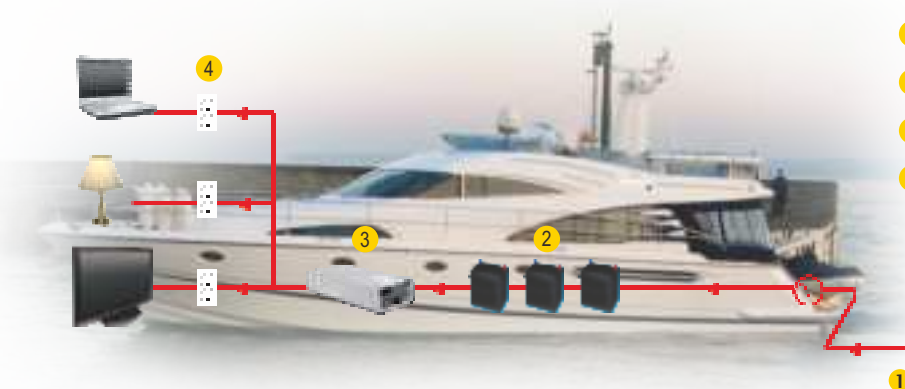


- ① Utility Input (Shore)
- ② Battery Bank
- ③ Off-Grid DC/AC Inverter (NTN series)
- ④ AC Outlet

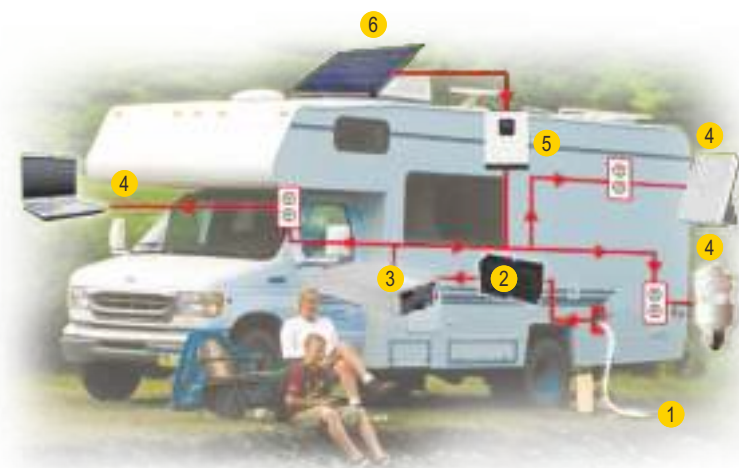

- ① Utility Inlet
- ② Battery Bank
- ③ Off-Grid DC/AC Inverter (NTN series)
- ④ AC Outlet
- ⑤ MPPT Charger (External)
- ⑥ Solar Panel (External)

SYSTEM CONFIGURATION

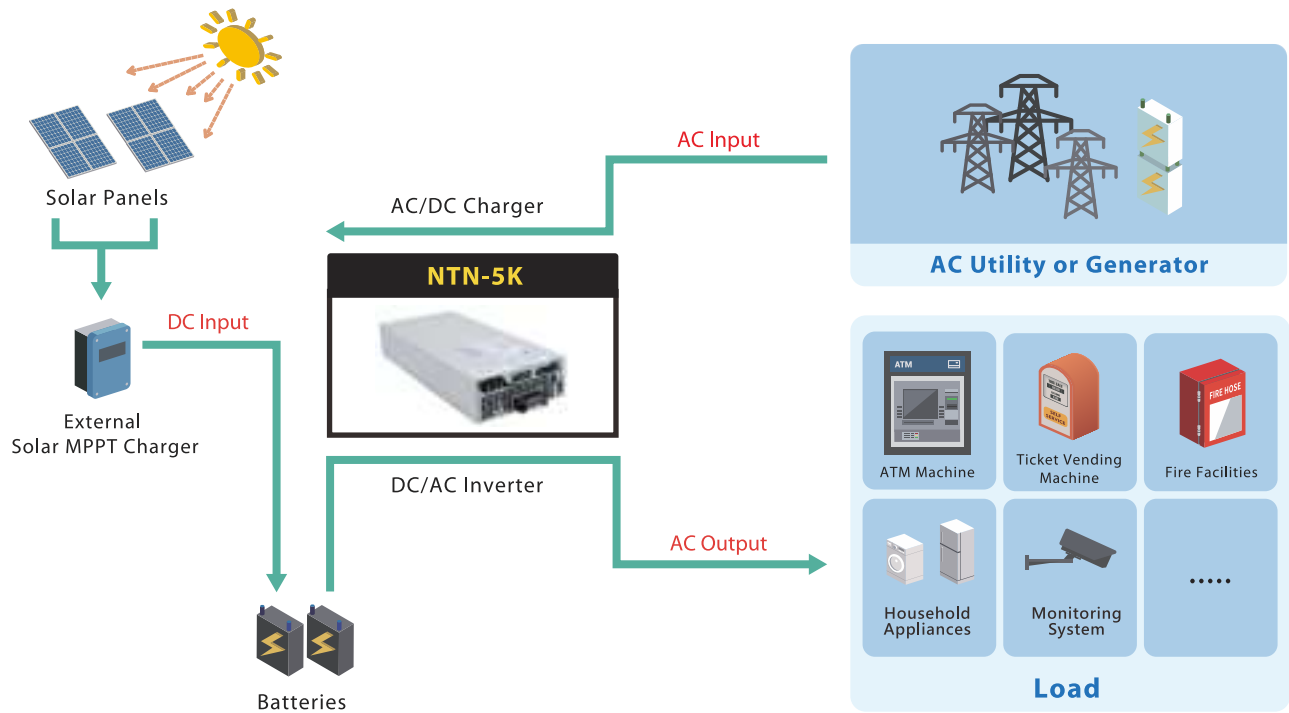

- 1 Battery Bank
- 2 Off-Grid DC/AC Solar Inverter (NTN series)
- 3 AC Outlet