


8 INCHES HIGH POWER RING LIGHT WITH LIGHT STAND KIT

Instruction Manual


Product Overview

- RH8B Ring Light is made of high-strength plastic for portability and durability.
- A brand new design that is lightweight, compact, yet powerful.
- Ideal for live streaming, vlogging, and use in the medical and cosmetic domains.
- This desk ring light kit includes a desktop stand, a phone holder, and a ball head. Equipped with a cold shoe mount for additional accessory attachments.

Package Contents



Ring Light × 1



Desk ring light kit × 1



Manual × 1




Carry Bag × 1



Bluetooth Remote (for Smartphone camera) × 1




Power Adapter × 1



USB Type-C Cable × 1

Remote control



① Screen:

LED Screen.

② ON/OFF Button:

Slide the side switch to power on or off.

③ Mode Button:

Short press to choose CCT or FX mode.

④ Values - Button:

Short press to choose scenes or decrease values. Long press to decrease quickly.


⑤ Values + Button:

Short press to choose scenes or increase values. Long press to increase quickly.


⑥ Sub-Mode Button:

Short press to choose sub-modes in the current mode.

Installing the Desk Stand




1. Take out the telescopic rod, screw the bottom clockwise into the base, and attach the ball head to the top 1/4" screw.




2. Insert 1/4" screw on top of the ball head into the threaded hole at the bottom of the ring light, then rotate clockwise until it is securely tightened.

Installing the Phone Holder




1. Install the phone holder onto the desired position on the telescopic rod, then push the metal buckle inward to lock it in place.




2. One side of the phone clamp can be manually extended to accommodate phones of different sizes.

Power Supply

Plug the power adapter into a wall socket, then connect it to the remote control device with a USB Type C cable for power supply.



Light Modes



CCT Mode:

When power is on, press the "M" button to choose the CCT mode.

Short press the "SET" button to switch between CCT and INT sub-modes.

In the CCT sub-mode, short press '+/-' buttons to adjust.


Light Modes



INT Sub-Mode:

Short press the "SET" button to choose the INT sub-mode.

In the INT sub-mode, short press '+'/'-' buttons to adjust.




SCENE Mode:

When power is on, press the "M" button to choose the SCENE mode.

Short press the "SET" button to switch between FX and INT sub-modes.

In the FX sub-mode, short press '+'/'-' buttons for scene selection.




Light Modes



INT Sub-Mode:

After selecting a scene, short press "SET" button to choose the INT sub-mode.

In the INT sub-mode, short press '+'/'-' buttons to adjust.



List of Scenes:



Lightning



Paparazzi



Defective
Bulb



Explosion



Welding



CCT Flash



CCT Pulse



Candlelight



CCT Loop



INT Loop




TV Screen



Fireworks

Pairing with Bluetooth Remote



Turn on the remote, then go to the Bluetooth settings on your phone to discover and connect to the device name "NEEWER Shutter".



Open your phone's camera app and press the shutter release button to take photos.

⚠ If the indicator doesn't light up, please check if the battery cover is loose or replace the battery

Caution

1. Avoid direct eye contact with the light to prevent vision damage.
2. Never attempt to disassemble or repair the product yourself as it may result in personal injury.
3. Always use the provided or certified power cables and power adapters.
4. Do not clean with alcohol or liquid.
5. Handle with care. Avoid hitting, colliding, and dropping the product.
6. Do not exposure to direct sunlight for long periods of time.
7. Unplug the power cable when not in use.
8. Clean with a soft, dry cloth.
9. Not adhering to the above will automatically invalidate the warranty.

Battery warning

1. Do not attempt to detach, modify, and repair the battery by yourself. Any unauthorized operation may cause battery leakage, overheating, burning, and other hazards.
2. Be sure to use the provided or certified chargers to prevent overcharging and shortcuts.
3. If unusual charging speed and indicator flashing occur, please stop charging and contact our customer service immediately.
4. Keep away from inflammable and explosive items.

Specifications

Model	RH8B
CRI	≥96
TLCI	≥97
Number of LEDs (2900K)	72 pcs
Number of LEDs (7000K)	72 pcs
Color Temperature	2900K-7000K
Input	5V/2A, 9V/2A, 12V/2A
Power	18W
Max Illuminance	1380lux/0.5m
Special Effects Modes	12

If you have any questions about product, we are glad to help.




US +1 732-623-9777 / UK +44 (0) 3330113494



Send us an email vip@neewer.com



www.neewer.com

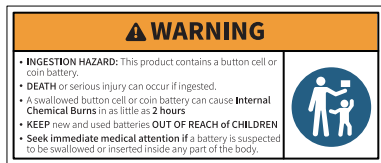

Facebook



www.neewer.com



Tiktok

UK REP

Lingfeng Electronic (UK) Ltd International
House, 10 Churchill Way, Cardiff, CF10 2HE,
United Kingdom
office.lingfeng@gmail.com

EC REP

NW Formations GmbH
Hoferstrasse 9B, 71636 Ludwigsburg, Germany
info.nwformations@gmail.com

Shenzhen Neewer Technology Co.,Ltd.
深圳市纽尔科技有限公司

Room 1903, Block A, Lu Shan Building No. 3023
Chunfeng Rd Luo Hu District, Shenzhen
Guangdong 518001, China
vip@neewer.com