



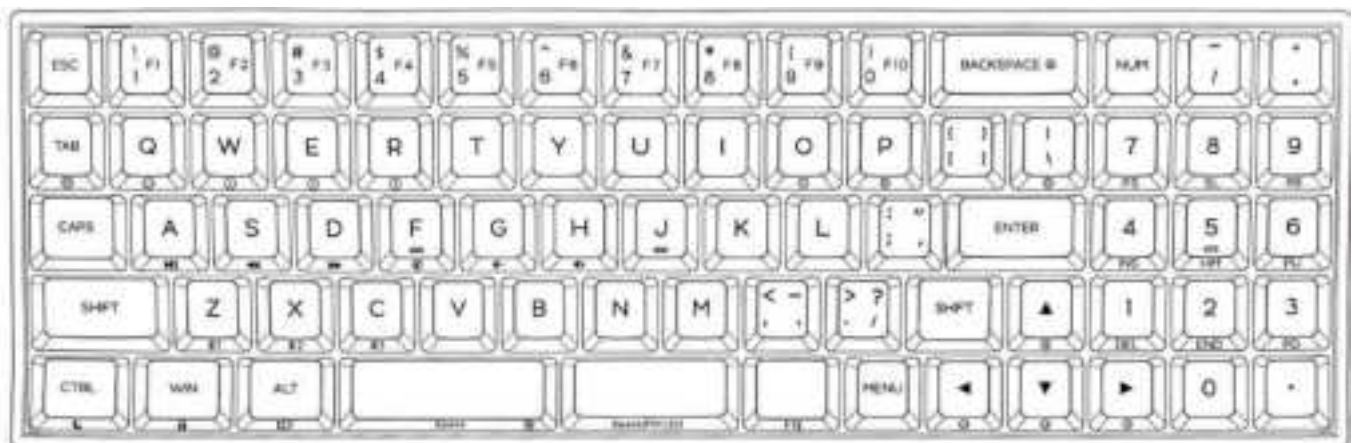
Skyloong SK71/S, GK73X/XS - Keyboard Manual

Contents


- 1 Overview
- 2 FN function description
 - 2.1 Backlight settings (Can not modify)
 - 2.2 BT&System settings (BT model only, can not modify)
 - 2.3 FN + function (Standard mode reference settings)
 - 2.4 Media key (Standard mode reference settings)
 - 2.5 Define mode
- 3 Documents / Resources
 - 3.1 References



Overview



Item: GK73 / GK73S / SK71 / SK71S/ SK73/ SK73S



(SK71 / SK71S model only)

*  **NOTE:** Press Fn with the function keys



One of the blue LED is flashing, The keyboard is connecting the BT equipment.











Bluetooth ON/OFF switch, Link to USB mode.
















FN function description

(Double-click FN to light FN's white LED, FN function is held, click FN again to escape from holding status).

Backlight settings (Can not modify)

Key	Function
FN + backspace ←	 Backlight ON/OFF
FN + O	 Backlight mode 1—5 (Can modify)
FN + P	 Backlight mode 6—9
FN + \	 Light effect pause/play
FN + ↓	 Backlight brightness
FN + ↑	 Backlight brightness +
FN + ←	 Backlight Effect Speed —
FN + →	 Backlight Effect Speed +

BT&System settings (BT model only, can not modify)

Key	Function
FN + Space	 Bluetooth ON/OFF switch Link to USB mode or the last BT equipment.
FN + Z	 <u>Long press:</u> The red&green LED or Z keycap will flash. The  bluetooth equipment can be paired. <u>Press:</u> The keyboard will connect the  BT equipment or disconnect.
FN + X	 <u>Long press:</u> The red&green LED of X keycap will flash. The  bluetooth equipment can be paired. <u>Press:</u> The keyboard will connect the  BT equipment or disconnect.
FN + C	 <u>Long press:</u> The red&green LED of C keycap will flash. The  bluetooth equipment can be paired. <u>Press:</u> The keyboard will connect the  BT equipment or disconnect.
 Note: If the bluetooth pairing is timed out or failed, please re-pair. If the bluetooth pairing is successful on the equipment, but the keyboard can not work still, please delete the keyboard in the bluetooth list of the equipment and pair again.	
FN + Tab	 Long press for 3 seconds to lock/unlock the keyboard
FN + Win	 Clock/Unlock Win key
EN + L - Ait	 ON/OFF Low voltage&charging status indicator Logo LED&back side LED
FN + L - Ctrl	 Keyboard's sleep time setting, white LED flashing on 0: never sleep, 1:5minutes, 2:10minutes...9:45minutes to sleep.

FN + function (Standard mode reference settings)

Tab1

Key	Function	Key	Function
FN + 1	F1	FN + _	/
FN + 2	F2	FN + +	•
FN + 3	F3	FN + []
FN + 4	F4	FN + Shift + [}
FN + 5	F5	FN + ;	,
FN + 6	F6	FN + Shift + ;	"
FN + 7	F7	FN + ,	%
FN + 8	F8	FN + Shift + ,	~
FN + 9	F9	FN + •	/
FN + 10	F10	FN + Shift + •	?






Tab2

Key	Function	Key	Function
FN + num 1	Del	FN + num 8	SL
FN + num 2	End	FN + num 9	PB
FN + num 3	PD	FN + num 0	-
FN + num 4	Ins	FN + num •	=
FN + num 5	HM	FN + Shift + num 0	--
FN + num 6	PU	FN + Shift + num •	+
FN + num 7	PS		

Media key (Standard mode reference settings)

Key	Function	Key	Function
FN + A	⏮ Play/Pause	FN + F	🔇 Mute
FN + S	⏮ Previous	FN + G	🔊 Volume —
FN + D	⏮ Next	FN + H	🔊 Volume+

Define mode

Key	Function
Standard mode	<p>Standard mode, all buttons can not be user-defined. User can customize your own personality keyboard by the following 4 modes. On-board mode 1/2/3 is strongly recommended.</p> <p>( Note: In the custom mode, except FN key, other keys can be redefined key values, some of the FN + "x" function can be also modified, except the backlight, bluetooth and system control. The FN button can not be moved, but user can define your own FN1/FN2/FN3 at any key on the keyboard in the custom mode).</p>
FN + Q Driver mode	<p> FN + Q is the driver mode layer. "Q" lights white LED, some special function (For example: You may assign a macro of more than 32 bytes to a key in the driver mode while it's unavailable in those onboard mode layer) and backlights can be set in this mode. You must keep the driver running and the keyboard connect with the driver. Press FN + Q again, back to standard mode.</p>
FN + W Onboard mode1 Layer1/ Fn1	<p> FN + W, onboard mode 1 layer 1. "W" lights white LED. no need to run and connect the driver. The keyboard works in the custom key functions and user can modify the key functions and macro Settings by the driver and these Settings can be downloaded and saved to the keyboard. The reference Setting: the multifunctional reuse Settings of the space bar, click for the regular space function. Space + other key combination to achieve the onboard mode layer3 call function. Press FN + W again, back to the standard mode</p>
FN + E Onboard mode2 Layer2 / Fn2	<p> FN+ E, onboard mode layer2, "E" lights white LED. The reference Setting: keyboard of MAC OS, the "control, option, command" key will be in the original position. User can modify the Settings by the driver, download and save to the keyboard, no need to run and connect the driver when use the Mac's function settings. Press FN + E again, back to the standard mode.</p>
FN + R Onboard mode3 Layer3 / Fn3	<p> FN + R, onboard mode layer3, "R" lights white LED. The reference Setting: Some special function keys, or combination keys, or macro keys, these settings of this mode can be called by the key FN3 in layer1&layer2. All Settings in this mode can be modified and saved to the keyboard. Press FN+R again, back to the standard mode.</p>

More function and LED backlight settings, please download or update the driver from the following website: <http://www.Jikedingzhi.com/downloadlist?driverID=41>

Documents / Resources