


封面

Bluetooth Headphone with Bluetooth Transmitter Charging Base K1

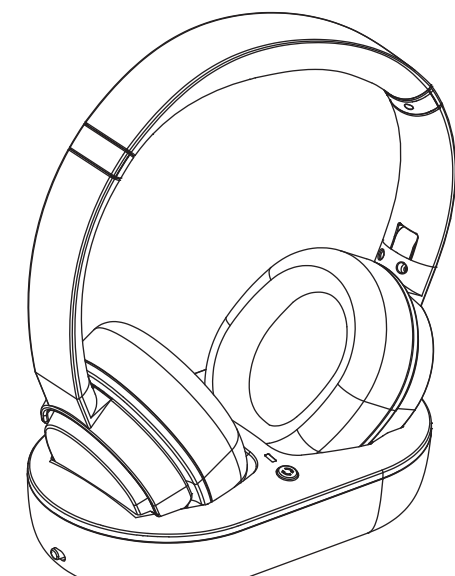

User Manual

Contents:

1. Product Overview2

2. Basic Operation4

3. Bluetooth Pairing and Connection5

4. AUX Wired Connection6

5. LED Indicator7

6. Charging8

7. TTS Tone9

8. Bluetooth Transmitter Charging Base9

8.1 Bluetooth transmitter operation9

8.2 Bluetooth Pairing and Connection10

8.3 Connection with Two Devices11

8.4 LED Indicator12

8.5 Charging13

9.Product Specification14


9.1 Headphone Specification14

9.2 Bluetooth Transmitter Charging Base Specification14

10. Attention and Q & A15

-1-

1. Product Overview:

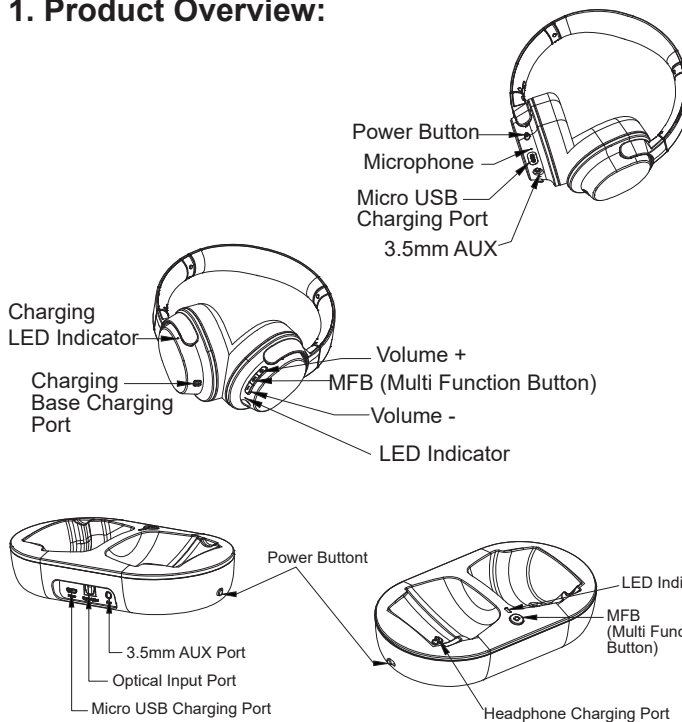

-2-

Package Contents:

A. K1 Bluetooth Headphone x 1

B. Micro USB Charging Cable x 1


C. K1 Bluetooth Transmitter Charging Base x 1

D. User Manual x 1

E. 3.5mm AUX Cable x 1

F. Optical Cable x 1

G. RCA Cable x 1

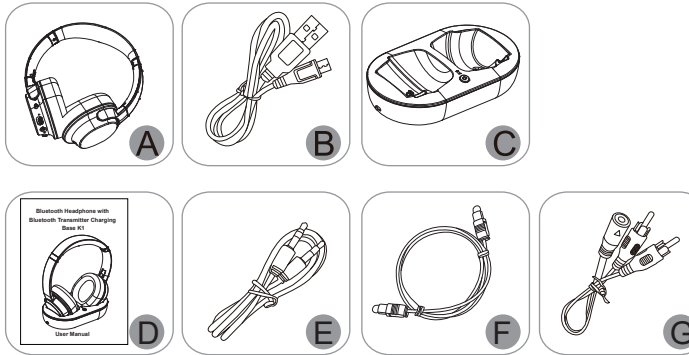

-3-

2. Basic Operation

Button	Function	Operation
Power Button	Power on	In off status, switch to ON side to power on, it will enter pairing mode automatically
	Power off	In on status, switch to OFF side to power off
	Play/pause	Short press to pause / play music when playing music
	Next song	Double press to next the next phone call number
	Answer a call	Short press when call coming
	Hang up a call	Short press during a call
	Reject a call	Long press for 1 second to reject a call when call coming
	Volume up	Short press (There is a tone when the volume is at its maximum)
	Next song	Long press for 1 second
	Volume down	Short press (There is a tone when the volume is at its minimum)
	Previous song	Long press for 1 second
	Volume +	In connected standby or music status, short press Volume - & Volume + at the same time to turn on
	Volume - & Volume +	In connected standby or music status, short press Volume - & Volume + at the same time for 5 seconds


-4-

3. Bluetooth Pairing and Connection

1. Switch to ON side, the K1 will power on and enter pairing mode with Red and Blue LED flash alternately.

2. Search and click to connect "K1" on your phone Bluetooth lists, LED turns to solid Blue LED after connected.


3. Control to answer/hang up a call, music play /pause, previous/ next song, volume up/ down etc through the MFB /Volume +/Volume- buttons.

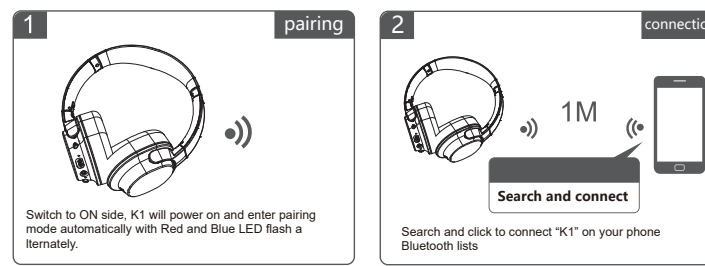

-5-

4. AUX Wired Connection

Plug one end of 3.5mm cable in the 3.5mm AUX interface of headphone, another end plug in phone or PC audio port. When the audio cable is plugged in using the AUX function, the headphone button has no function. The AUX function can also be used when the headphone battery has no power.

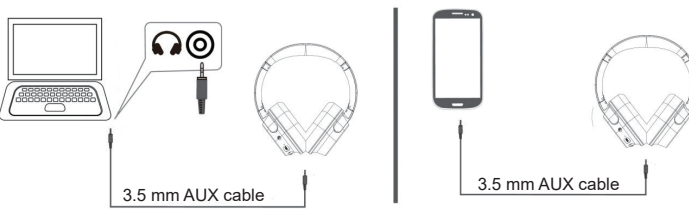

Notes:

1. The buttons of headphone are invalid when AUX mode.

2. AUX function could be work when battery out of power or item power off.

3. Bluetooth function will power off when plug AUX cable.

4. The headphone can not power on while plugged AUX cable, need to pull out the cable first then power on the headphone.

-6-

5. LED Indicator

Status	LED Indicator
Power on	Blue LED is on for 2 seconds
Power off	Red LED is on for 2 seconds
Pairing	Blue and Red LED flash alternately
Unconnected standby mode	Blue LED flash once every 2 seconds
Connected standby mode	Solid Blue LED
Playing music	Solid Blue LED
Taking mode	Solid Blue LED
Delete paired records	Red and Blue LED is on for 2 seconds at the same time
Charging	Solid Red LED
Full charged	Solid Blue LED
Low battery	Red LED flash once every 10 seconds


-7-

6. Charging


Please charge the K1 at once when the Red LED flash. Charging time about 2 hours. Blue LED turn on when full charged.

Connection for charging

1. Plug one end of micro USB cable to K1, another end to USB charger (Car charger, power bank or PC etc)



Charging with Power



Charging with PC

2. Use Charging Base for charging, connect Micro USB charging cable to Charging Base, place K1 Headphone on the Charging Base, Headphone's Red LED is on when is charging, Blue LED turn on when is full charged. (When K1 transmitter is power on and use as the Charging Base for charging, place K1 Headphone on the Charging Base, the K1 transmitter will power off with Red LED flash once)

Notes:

1. Please charge the item at least once for every 2 months when without use.

2. Charge when power on, it is normal for the Bluetooth indicator will overlighting with the charge indicator.

-8-

7. TTS Tone

Status	TTS Tone
Power on	Power on
Power off	Power off
Enter pairing mode	Pairing
Connected successful	Connected
Disconnect	Disconnected
Low voltage alert	Battery low

-9-

8. Bluetooth transmitter charging base

8.1 Bluetooth transmitter operation

Function	Operation
Power on	Plug in Micro USB charging cable to charging port, switch power button to On side
Power off	Switch power button to OFF side; Plug out charging cable; Put the headphones on for charging will turn off the transmitter
Enter pairing mode	In unconnected standby or connected one device status, long press MFB for 5 seconds to enter pairing mode. (When connected one device and enter pairing mode, the first connected device is not affected and can be used normally. Not work when in multi point connections, when the second device is connected successfully will with temporarily not working, please wait for 5 to 20 seconds for normal working) No connection in pairing mode, will keep pairing mode all the time
Delete pairing record	In pairing mode, double press MFB to clear the device information. If have no binding device record, will enter pairing mode automatically, if have binding device record, will enter reconnect mode

-10-

Binding device operation

1. First, delete the pairing record. Double press the MFB in pairing mode (Because there is only one pairing record to perform the binding operation).

2. Pair and connect the binding device with K1.

3. After successfully connect with the headphone, double-click the MFB to bind, and the blue LED flash 5 times after the binding is successful.

4. Replace the binding device when there is a binding record. After delete the pairing record, bind the new device to K1 Transmitter after successful connection, then the bind device record can be replaced.

5. After successfully binding the device information, K1 Transmitter automatically re-power on and reconnects to the device. Reboot can update the storage space and avoid new problems.

8.2 Bluetooth pairing and connection

1. Plug in Micro USB charging cable to charging port, switch power button to ON side to power on.

2. Enter pairing mode: Power on will enter pairing mode automatically; Unconnected standby mode or connected one device, long press MFB for 5 seconds to enter pairing mode.

3. Turn on the Bluetooth headphone or Bluetooth speaker, enter pairing mode, place K1 Transmitter and the device close and wait for about 30 seconds, when Blue LED is on after connected.

4. Connect one end of 3.5mm AUX cable with K1, another end to phone or PC, the headphone or speaker can be heard music from phone or PC.

-11-

8.3 Connection with Two Devices

1. Follow 8.2 to connect with the first device, long press MFB button for 5 seconds to enter pairing mode (The first connected device will work well).

2. Turn on the second device (Bluetooth headphone, speaker or receiver) enter pairing mode, place it close with K1 Transmitter and wait for 30 seconds, K1 will connect the second device. After the device is connected, you can hear music from it, this is the multi point connections. (The first device will have music issue when connect to second device, then it will be fine after few seconds)

*Priority support aptX™ low latency for one connection (Connected device must support aptX™ low latency), support aptX™ low latency for two connections if two devices priority support aptX™ low latency, support aptX™ for two connections if two devices priority support aptX™, it will turn to SBC if two devices CODEC is not the same like one support aptX™ low latency and another one support aptX™.

8.4 LED Indicator

Status	LED Indicator
Power on	Without binding device, Blue LED flash twice.
Power off	With binding device, Blue LED is on for 5 seconds.
Pairing	Blue and Red LED flash alternately
Reconnect	Blue LED flash once every second
Standby	Blue LED flash once every 2 seconds
Delete pairing record	Red and Blue LED is on for 2 seconds at the same time
Connected	Solid Blue LED
Multi point connections	Solid Blue LED
Charging	Solid Red LED
Full Charged	Solid Green LED


-12-

8.5 Charging

1. K1 Charging Base has no build-in battery, need power supply when use as bluetooth transmitter or charging for headphone.

2. Charging connection

Plug one end of micro USB cable to K1 Charging Base, another end to USB charger (Car charger, power bank or PC etc)

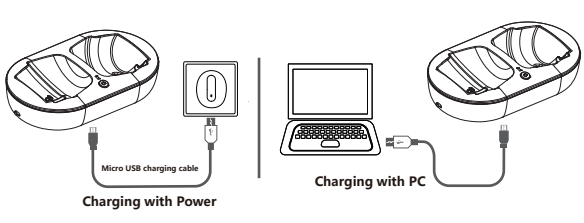

1. When K1 transmitter is power on and use as the Charging Base for charging, place K1 Headphone on the Charging Base, the K1 transmitter will power off with Red LED flash once

2. Please cut off the power supply if not use.

-13-

9. Product Specification

9.1 Headphone Specification:

Bluetooth Version	V5.0
Bluetooth Chipset	QCC3034
Operation Range	10 meters
Bluetooth Profile	HSP, HFP, AVRCP, A2DP
CODEC	aptX™ Low Latency, aptX™, AAC, SBC
Battery Capacity	600mAh/3.7V
Charging Time	About 2 hours
Standby Time	80 hours
Music Playing Time	About 28 hours (70% volume)
Net Weight	About 234g
Dimension	193.3*160*80.3mm

Notes: The actual using time will be different according to the ambient and music style.

9.2 Bluetooth Transmitter Charging Base Specification:

Bluetooth Version	V5.0
Bluetooth Chipset	CSR BC8670
Operation Range	Indoor barrier free 30 meters
Bluetooth Profile	A2DP
CODEC	aptX™ Low Latency, Faststream, aptX™, SBC
Net Weight	About 145g
Dimension	170*100*40.7mm

-14-

10. Attention and Q & A

About K1 Headphone:

A. How to delete paired records?

Power on , long press "Volume - & Volume +" buttons for 5 seconds at the same time to delete paired records (Red and Blue LED is on for 2 seconds at the same time). Pls try to delete paired records when have connection problems.

B. What's the password for pairing?

Some devices require password for pairing, pls try 0000 (four zero), 8888 (four eight), 1111 (four one) or 1234 (one two three four).

C. Which devices could charge for the headphone?

Any car charger, power bank, PC etc which meet DC 5V, charging current more than 400mA could be charge for this item. And K1 Charging Base.

D. How to do if can not power or connection issue?

Please try charging reset, when power on, plug charging cable to charge to reset and power off. (When power button switch to ON, reset will power on automatically. When power button switch to OFF, reset will not power on) Re-power on can use normally.

-15-

E. Why the headphone power off automatically?

K1 will power off under standby mode for over 10 minutes, or the battery voltage is less than 3.1V.

F. Disconnect (Out of valid connection range)?

When headphone and transmitter are out of valid connection range, headphone will enter Linkloss mode (Indicator is still connected, headphone will reconnect last device every 15 seconds), will enter pairing mode if reconnect fail for over 10 minutes.

About K1 Bluetooth Transmitter Charging Base:

A. About reconnect

K1 can storage 4 devices information, and the excess will be replaced by new device information (Why store 4 units? Because K1 will reconnect to all paired devices after power on, and if there are too many, the re-connection time will be too long) K1 waiting time for re-connection is: if one device is paired, the re-connection time is about 10 seconds, and the re-connection time for two devices is 12 seconds;

When there are pairing records, K1 will automatically connect to all connected devices every time when power on (but only 2 devices can be connected at the same time, and the bind device will be connected first and then to the last connected device)

B. How to delete pairing record

In pairing mode, double press MFB to clear the device information. If have

-16-

no binding device record, will enter pairing mode automatically. If have binding device record, will enter reconnect mode

C. How to select SPDIF/AUX

The default power on status is optical mode, and it will automatically switch to AUX mode when the AUX audio cable is inserted.

D. How to charge for the charging base

The charging base has no build-in battery, need power supply when use as bluetooth transmitter or charging for headphone.

E. How to do if can not power on or dead when connect?

Please try reset and power on, and delete the pairing record.

Customer Service

Free user support:

We offer telephone, email and live online support. Your email is guaranteed to be replied to within 1 working day, and is normally responded to even faster than that!

Ansten support site also provides complete step-by-step instructions and answers to FAQ online.

Online Video User Guides

We have clear video user guides for most of our products, which you can find on video sites. You can search on youtube: "Ansten TV headphone"

Contact us:

Email: anstenusa@gmail.com

site: www.ansten.net

-17-

尺寸: 110X120mm

材质: 128克双铜纸双面单色印刷

不做表面处理

折叠 (手风琴式)