



Akko

3084 (B) Plus
Multi-modes

用户手册
User Manual

目录

3084B规格参数	1
3084B组合键功能	2
3084B系统功能(Windows)	3
3084B系统功能(Mac)	4
3084B背光调节	5
3084B蓝牙使用指南	6
3084B蓝牙使用步骤1	7
3084B蓝牙使用步骤2	8
按键 / 灯光自定义说明和调用说明	9
Akko售后服务规范	10

Menu

3084B Technical Specifications	11
3084B HotKeys	12
3084B System Commands (Windows)	13
3084B System Commands (Mac)	14
3084B Backlight Settings	15
3084B Bluetooth Feature Overview	16
3084B Bluetooth Setup Instruction 1	17
3084B Bluetooth Setup Instruction 2	18
Key/Lighting Effects Customization Instruction	19
Akko Warranty and Service Statement	20

3084B规格参数

1

尺寸

约316*126*28mm

重量

约0.85kg

产地

中国

类型

机械键盘

键帽

PBT材质

连接方式

蓝牙 / 无线 / 有线

连接线

Type-C To USB

电池容量

1800mAh

多媒体键

支持

全键无冲


支持

按键/灯光自定义

键盘需在有线模式下配合驱动进行自定义

3084B组合键功能

2

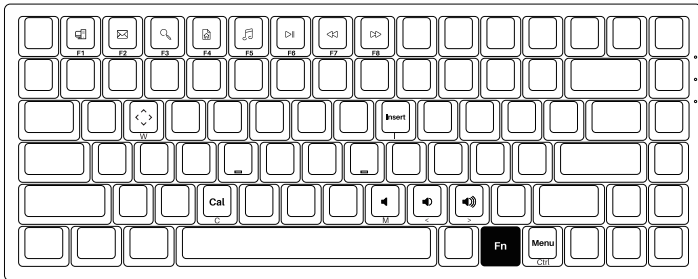


Fn+	F1	=	我的电脑
	F2		电子邮件
	F3		Windows搜索
	F4		浏览器主页
	F5		多媒体播放器

Fn+	F6	=	播放 / 暂停
	F7		上一首
	F8		下一首
	I		Insert
	C		计算器

Fn+	M	=	静音
	<		音量减小
	>		音量增加
	W		将 WASD 与
			↑ ↓ ← → 键对调

3084B系统功能(Windows)

3

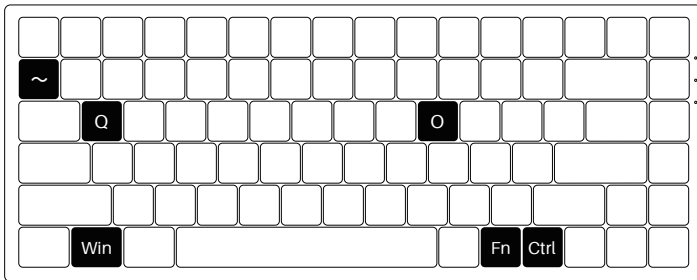

锁Win键

Fn + 左Win

恢复出厂设置

长按 Fn + ~ (5秒)

将Ctrl变成Menu (App) 键

长按Fn + 右Ctrl (3秒)

进入Windows系统


长按Fn + Q (3秒)

进入Mac系统

长按Fn + O (3秒)

3084B系统功能(Mac)

4

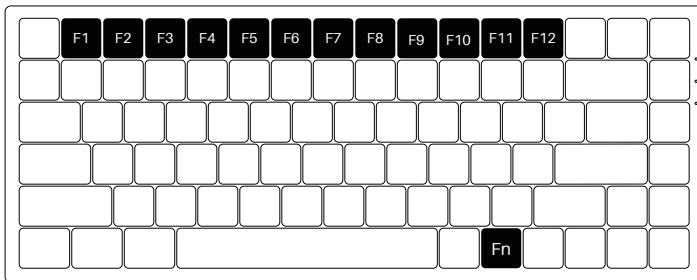

F1 降低显示屏亮度

F2 增加显示屏亮度

F3 开放任务控制

F4 呼出Siri

F7 向后跳(音频)

F8 暂停/播放(音频)

F9 向前跳过(音频)

F10 静音

F11

F12

左Win

左Alt

调低音量

调高音量

左option

左command


右Alt 右command

Fn + (F1 ~ F12)

F1 ~ F12

3084B背光调节

5

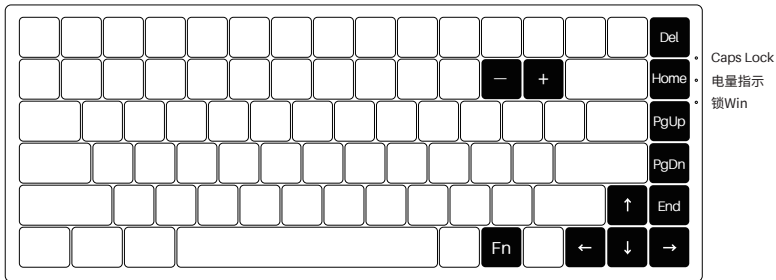


Fn+	Del	=	流星、彩泉涌动、峰回路转、百花争艳
	Home		常亮、涟漪、如影随形、川流不息
	PgUp		繁星点点、霓虹、光波、层出不穷
	PgDn		斜风细雨、踏雪无痕、聚合、一石二鸟
	End		呼吸、极光、正弦波、雨滴
	L		灯光开启 / 关闭
	\		在所有灯效RGB彩光模式下,通过这个快捷键,可以调节灯光颜色致7色单色+RGB循环。

Fn+	“↑”	=	灯光变亮
	“↓”		灯光变暗
	“←”		灯光方向向左
	“→”		灯光方向向右
	“-”		灯光速度变慢
	“+”		灯光速度变快

3084B蓝牙使用指南

6

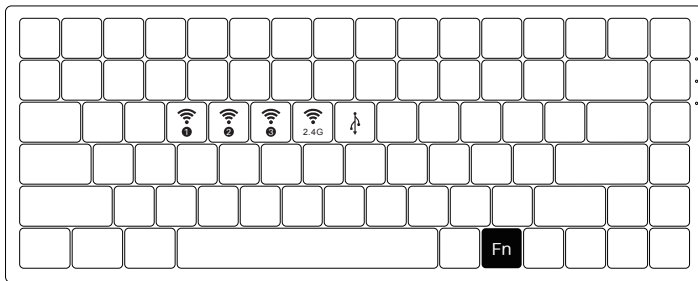

Fn+	E	=	蓝牙设备1	短按回连蓝灯慢闪; 长按配对蓝灯快闪
	R		蓝牙设备2	
	T		蓝牙设备3	
	Y		2.4G无线设备	短按回连绿灯慢闪; 完成匹配后恢复灯效
	U		有线模式	

3084B蓝牙使用步骤1

1.切换到蓝牙模式

- ① 键盘不插USB线未连接电脑使用的状态下，底部电源拨动开关或往左进入Windows系统/或往右进入Mac系统，长按Fn + E / R / T可进行蓝牙匹配，E / R / T按键上蓝灯快闪，即可进入蓝牙匹配模式。
- ② 键盘插入USB线连接电脑使用的状态下，底部电源拨动开关不需拨动也可进蓝牙模式，直接长按Fn + E / R / T便可进行蓝牙匹配，E / R / T按键上蓝灯快闪，即可进入蓝牙匹配模式。

2.选择蓝牙设备记忆组

为便于记忆对应设备名称，本机蓝牙有5.0和3.0两组架构，蓝牙5.0为Akko 3084BT-1 / Akko 3084BT-2 / Akko 3084BT-3；蓝牙3.0为AKK0 3084BT3.0；您通过Fn + E / R / T，完成匹配设定后，系统会默认记忆您关闭蓝牙模式前最后一次连接的设备。

3.设备匹配

使用您的PC、PAD、手机等设备，开启蓝牙进行匹配，第一次匹配过程中您所使用的设备会搜索出AKK0 3084 BT3.0 (蓝牙3.0) Akko 3084 - 1 (蓝牙5.0) 两组。请根据您的喜好选择键盘的蓝牙组。

(注：部分设备只能搜索到蓝牙5.0：)

4.设备切换

完成了3组蓝牙设备的匹配后,系统会自动记忆;通过短按Fn+E / Fn+R / Fn+T,可快速切换3个蓝牙设备使用。

5.设备关闭

键盘在不使用的时候,关闭背面开关电源,可节省电量;键盘空闲15分钟之后,进入休眠模式,可按任意键唤醒。注:使用Windows系统,开启省电模式会影响蓝牙设备的休眠唤醒时间。

6.设备匹配

如忘记设备,或者蓝牙连接出现混乱的情况,如需重新连接蓝牙设备时,需要删除电脑中原有的3084蓝牙设备记忆。

■ 按键 / 灯光自定义说明和调用说明

1. 键盘按键/灯光自定义需在有线模式下配合驱动进行。
2. 键盘有线模式下灯光可搭配驱动实现音乐律动。
3. 按键/灯光自定义及调用说明;请在我司官网下载“Akko Cloud”驱动。
4. 驱动下载地址www.akkogear.com

- 1.Akko机械键盘享受非人为损坏1年保修服务,即从购买日起,1年以内免费维修。
- 2.如超过条款1的保修期限,Akko官方将收取不超过市场平均价格的费用提供维修服务。
- 3.用户自行拆开键盘视为放弃免费维修服务,即使1年内损坏,也按照售后服务条款2执行。
- 4.不同销售平台的特殊服务条款,以购买平台规则为准。

注意 人为损坏不局限于键盘进水、高处坠落、过度用力拉扯线材等,键盘为电子产品,请按照电子产品
事项 保护方式爱惜使用。

售后电话:0755-27728007

售后QQ:981572876

*官方售后服务时间为每周一至周五上午10:00至下午18:00,节假日以国家法定节假日休息为准。

*因受维修时间,物流时间,零件采购时间等不可控因素,售后时间会有不同,以实际损坏情况评估为准,请用户耐心等待。


3084B Technical Specifications

11

Dimensions	Weight	Country of Origin	Type
Approximately 316*126*28mm	Approximately 0.85kg	China	Mechanical Keyboard
Keycap	Connection	Interface	Battery Capacity
PBT Material	Bluetooth/USB/2.4Ghz	Type-C To USB	1800mAh
Multimedia Keys	N-Key Rollover	Key/Lighting Effects Customization	
YES	YES	The keyboard can only be customized with driver in wired mode	

3084B HotKeys

12

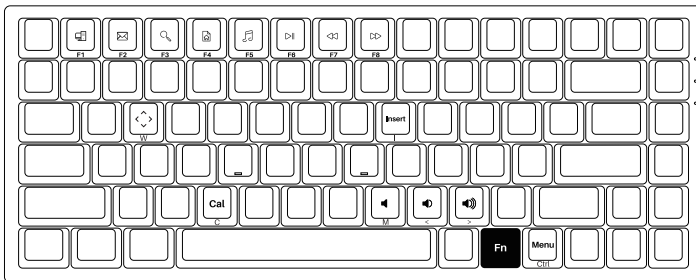


Fn+	F1	=	File Explorer
	F2		E-mail
	F3		Windows Search
	F4		Browser Homepage
	F5		Media

Fn+	F6	=	Pause /Playback
	F7		Previous Song
	F8		Next Song
	I		Insert
	C		Calculator

Fn+	M	=	Mute
	<		Decrease Volume
	>		Increase Volume
	w		Swap W A S D
			with ↑ ↓ ← →

3084B System Commands(Windows)

13

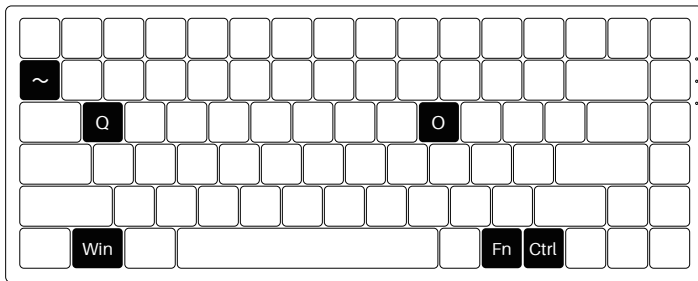

Lock Windows Key

Press Fn and left Win key

Restore Factory Settings

Hold down Fn and press ~ key for 5S

Revert Ctrl into Menu (APP) key

Hold down Fn and press right Ctrl for 3S

Enter Windows system


Hold down Fn and press Q key for 3S

Enter Mac system

Hold down Fn and press O key for 3S

3084B System Commands(Mac)

14

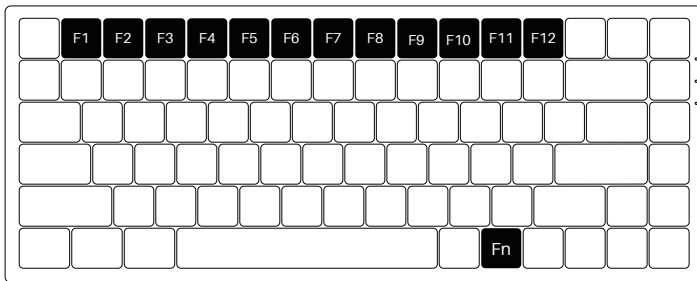

F1 Decrease display brightness

F2 Increases display brightness

F3 Open mission control

F4 Activate Siri

F7 Skip back (Audio)

F8 Pause/Play (Audio)

F9 Skip forward (Audio)

F10 Mute

F11 Volume down

F12 Volume up

Left Win Option

Left Alt Command


Right Alt Command

Fn + (F1 ~ F12)

F1 ~ F12

3084B Backlight Settings

15

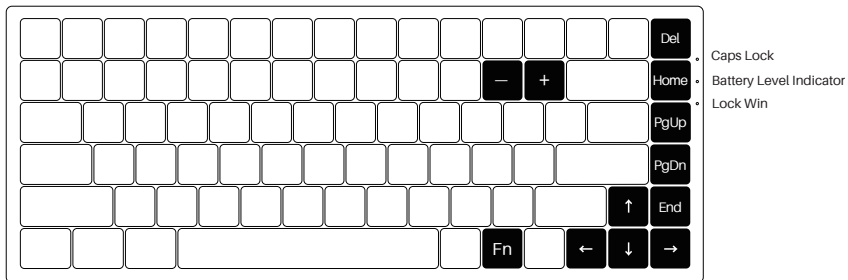


Fn+	Del	=	Effect 1, Effect 2, Effect 3, Effect 4
	Home		Effect 5, Effect 6, Effect 7, Effect 7
	PgUp		Effect 9, Effect 10, Effect 11, Effect 12
	PgDn		Effect 13, Effect 14, Effect 15, Effect 16
	End		Effect 17, Effect 17, Effect 19, Effect 20
	L		Light On / Off
	\		In all lighting effects with RGB color mode, this shortcut allows you to set the backlight color to 7 single color with RGB loop effect.

Fn+	"↑"	=	Bright
	"↓"		Dim
	"←"		Set animation direction to left
	"→"		Set animation direction to right
	"."		Slower Animation
	"+"		Faster Animation

3084B Bluetooth Feature Overview

16

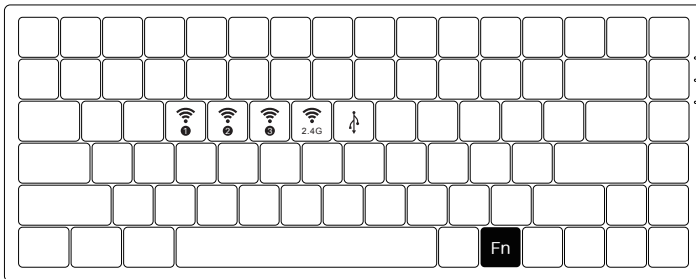

Fn+	E	=	Bluetooth device 1		Short press to connect with slow flashing blue LED; Press and hold to pair device with fast flashing blue LED.
	R		Bluetooth device 2		
	T		Bluetooth device 3		
	Y		2.4G wireless device	Short press to connect with slow flashing green LED; The lighting effect will be restored when pairing succeeds.	
	U		Wired mode		

1.Switch to Bluetooth mode

- ① When the keyboard remains unplugged, users can push the switch on the back to the left/right to enter Windows/Mac mode correspondingly. Then long press and hold Fn + E / R / T to start pairing with Bluetooth devices. The keyboard will enter Bluetooth pairing mode when the blue LEDs under E / R / T keys flash quickly.
- ② When the Keyboard is plugged into the computer through USB interface, it will enter Bluetooth mode automatically without having to push the switch on the back. Users can directly long press and hold Fn + E / R / T to enable Bluetooth pairing. The keyboard will enter Bluetooth pairing mode when the blue LEDs under E / R / T keys flash quickly.

2.Set the Bluetooth profile

To help user recognize individual Bluetooth device, the keyboard is equipped with both Bluetooth 5.0 and 3.0 frameworks. The device name under the Bluetooth 5.0 framework is Akko 3084BT-1 / Akko 3084BT-2 / Akko 3084BT-3 while the device name under Bluetooth 3.0 is AKK0 3084 BT3.0. Once the devices are paired through Fn + E/R/T, the system will by default memorize the last connected device before you turn off the Bluetooth mode.

3. Bluetooth Pairing

The keyboard can be paired with PC, Pad, smartphone and other devices with Bluetooth turned on. When you first try to search Bluetooth devices, two groups of device names shall appear with Akko 3084 BT3.0 (Bluetooth 3.0) and Akko 3084-1 (Bluetooth 5.0). Select a Bluetooth group based on your preferences (Note: some devices can only search for the Bluetooth 5.0 group).

4. Switch the Bluetooth device

After 4 Bluetooth devices have been paired with the keyboard, press Fn+E / Fn+R / Fn+T / Fn+Y for at least 3 seconds to quickly switch between them.

5. Shut off the keyboard

Turn the power off on the keyboard back panel while unused for power saving;

If the keyboard remains unused for over 10 mins, it would go to sleep mode and you can activate it by pressing any key.

Note: The battery saver mode for Windows system would affect/delay the sleep activation time of the keyboard.

6. Reset the keyboard

If you forgot the specific paired front-end device or if there remains disorder in Bluetooth connection and communication, you'll need to clear the computer's Bluetooth cache by removing the 3084 keyboard from the list of connected device.

Key/Lighting Effects Customization Instruction

1. The key/lighting effects customization must be completed in wired mode with Akko driver.
2. In wired mode, the lighting effects can also achieve music rhythm effects with Akko driver.
3. Please download the Akko Cloud driver on our website.
4. Users can download the driver via en.akkogear.com

1. Akko provides 1-yr warranty for customers in mainland China. For other regions, please contact your seller (Akko distributor) for specific warranty policy.
2. If the warranty window expires, customers need to pay for repairs. Akko will also provide instructions if users prefer to repair the keyboard by themselves. However, users shall take full responsibility for any loss happened during self-repair.
3. Disassembling the keyboard without manufacturer/seller's instruction will immediately void the warranty.
4. The return and warranty policy may vary in different platforms and are subject to the specific distributor at the time of purchase.

Precautions

Man-made damage is not limited to immersion, falling off, and pulling off the wires with excessive forces, etc.

