

## 2.4GHz PIR Sensor instruction manual

Model No.: PIR1-RF

### Contents

---

|                                      |   |
|--------------------------------------|---|
| <u>Feature</u> .....                 | 2 |
| <u>Parameter</u> .....               | 2 |
| <u>Description</u> .....             | 3 |
| <u>Battery Installation</u> .....    | 3 |
| <u>Link/Unlink</u> .....             | 4 |
| <u>Function Description</u> .....    | 5 |
| <u>Function setting method</u> ..... | 6 |
| <u>Compatibility</u> .....           | 7 |
| <u>Installation Direction</u> .....  | 8 |
| <u>Attention</u> .....               | 9 |

## 1. Feature



Motion detection support smart scene automation and intrusion warning



Support to link with one or multi 2.4G lighting series



Support to set "hold time" function



Built-in high sensitive lighting sensor



Strong magnetic mounting method



Flexible 360°angle

## 2. Parameter

Model No.: PIR1-RF

Battery: CR123A 3V

Standby Power Consumption: 12μA

Detection Angle: 120°


Detection Distance: 7m

RF: 2.4GHz


Control Distance: 30m

Working Temperature: -10~40°C

### 3. Description

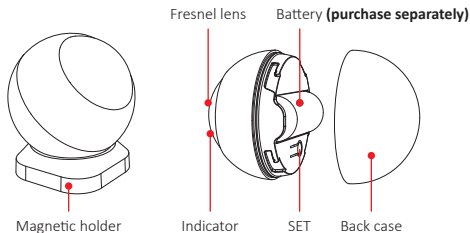


### 4. Battery Installation

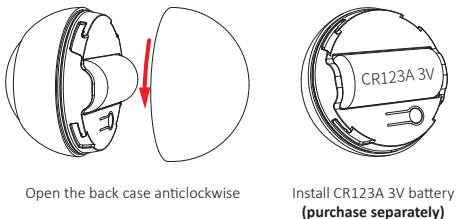

## 5. Link/Unlink

PIR sensor need to be paired with lights, countless lights can be worked with it.


### 1). Linking Code Instructions



Power off 10 seconds and power on again.



Short press " SET " button 3 times within 3 seconds.




Lights blink 3 times slowly means linking is done successfully.



Linking failed if light is not blinking slowly, Please follow above steps again.  
(Note: Light that have linked can't link again)


### 2). Unlinking Code Instructions



Power off 10 seconds and power on again.



Short press " SET " button 5 times within 3 seconds.



Lights blink 10 times quickly means unlinking is done successfully.



Unlinking failed if light is not blinking quickly, Please follow above steps again.  
(Note: Light haven't linked that don't need to unlink)

## 6. Function Description

### **\*Brightness feature while motion detected:**

Lighting up, brightness can be set 20% or 100%.

### **\*Light Sense:**

ON: PIR sensor only works in gloomy area

OFF: PIR sensor works in any place

### **\*Night Light:**

ON: bright sence to gloomy sence, light up automatically (brightness is 1%), gloomy sence to bright sence, light off automatically

OFF: Light is off while motion is not detected in any sence

### **\*Hold time while motion detected**

(30S / 2 minutes / 10 minutes / 60 minutes):

For example: it will turn on light if motion is detected and activated timer function (30 seconds), the light will be off if new motion is not detected within 30 seconds.


## 7. Function setting method

**Factory default:** Brightness feature while motion detected: 100%

Hold time while motion detected: 30 seconds

Light sence: OFF

Night Light: OFF



Maximum distance 1m



- 1 Long press "SET" seconds, Indicator flashes quickly to start setting up. (Attention: exited without operation within 10 seconds)
- 2 Short press the keys, details as following

| Set up function                          | Short press 1 time on remote                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Brightness feature while motion detected | Master On: 100%    Master Off: 20%                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Light Sence (ON/OFF)                     | <div>  On<br/>Zone-1         </div> <div>  Off         </div>                                                                                                                                                                                                                                     |
| Night Light (ON/OFF)                     | <div>  On<br/>Zone-2         </div> <div>  Off         </div>                                                                                                                                                                                                                                     |
| Hold Time                                | <div>  30S     10Minutes<br/>Zone-3                      Zone-4         </div> <div>  2Minutes     60Minutes         </div> |

## 8. Compatible with these 2.4G RF remote controls (Purchased separately)



FUT100



FUT089S



FUT089  
FUT089-B



FUT092  
FUT092-B



FUT096  
FUT096-B



FUT006



FUT007



B1 / T1



B2 / T2



B3 / B3-B / T3




B4 / B4-B / T4




B8

## 9. Installation Direction

- 1). Location: install it in the area where people usually cross over and distance must be 2m over the ground. As shown below.





Useful detecting area (vertical view)



Useful detecting area (overhead view)

- 2). Stay away from air conditioner, fridge, oven...etc which is easy to affect temperature, don't display it under sunshine directly.






- 3). Remove sticker on the back base, fix base holder on suitable position.



Remove sticker



Put it on magnetic base

## 10. Attention

- 1). Remove battery if don't often use it, save it in dry and static free condition.
- 2). Don't use it near metal or strong hertz area, it will affect communication distace.



Made in China