



[Manuals.plus](#) /

> [COSYLAND](#) /

> COSYLAND 10-inch Rainfall Shower Head with Handheld Combo (Model CS0001) Instruction Manual

COSYLAND CS0001

COSYLAND 10-inch Rainfall Shower Head with Handheld Combo

MODEL: CS0001

Instruction Manual

Introduction

This manual provides detailed instructions for the installation, operation, and maintenance of your COSYLAND 10-inch Rainfall Shower Head with Handheld Combo. Please read this manual thoroughly before installation and use to ensure proper function and longevity of the product. Keep this manual for future reference.

Safety Information

- Ensure all connections are tightened properly to prevent leaks. Use plumber's tape as instructed.
- Do not overtighten connections, especially plastic components, to avoid damage.
- Verify that the water supply is turned off before beginning installation.
- Use caution when handling tools during installation.
- Ensure the shower arm extension is securely fastened to support the weight of the rainfall shower head.

Packing List

Please check the package contents against the list below:

Item	Quantity	Description
10" Rainfall Shower Head	1	California Compliant, TPR and ABS construction, Chrome Finish.
Handheld Shower Head	1	5 settings, TPR and ABS construction, Chrome Finish.

Item	Quantity	Description
11" Extension Arm	1	Adjustable height and angle, with locking screws.
60" Shower Hose	1	Stainless steel construction.
3-Way Water Diverter	1	Brass core, 180-degree switch for spray mode selection.
Adhesive Bracket	1	For handheld shower head mounting.
Pipe Sealant Tapes	2	For leak-proof connections.
Hooks	4	Stainless steel hooks.
Bath Sponge	1	Accessory.
Washers	Various	For sealing connections.

Refer to the image below for a visual representation of the packing list:



Image: Contents of the COSYLAND Shower Head Combo package, including rainfall head, handheld head, extension arm, hose, diverter, and accessories.

Installation Instructions

This shower head combo is designed for easy installation without the need for professional tools. It works with all standard 1/2" pipe threads.

1. **Prepare the Shower Arm:** Ensure your existing shower arm is clean and free of debris. Apply plumber's tape (provided) clockwise around the threads of your existing shower arm.
2. **Install the 3-Way Water Diverter:** Screw the 3-way water diverter onto your existing shower arm. Hand-tighten first, then use a wrench if necessary, but do not overtighten. Ensure a washer is in place for a leak-proof seal.
3. **Attach the Extension Arm:** Screw the 11-inch extension arm onto the top outlet of the 3-way diverter. Ensure a washer is in place and hand-tighten. The extension arm features locking screws for stability; tighten the larger inner hexagon nut during installation.
4. **Connect the Rainfall Shower Head:** Attach the 10-inch rainfall shower head to the end of the extension arm. Ensure a filter and washer are in place for a reliable leak-proof connection. Hand-tighten.
5. **Connect the Handheld Shower Hose:** Attach one end of the 60-inch stainless steel hose to the side outlet of the 3-way diverter. Ensure a washer is in place and hand-tighten.
6. **Attach the Handheld Shower Head:** Connect the handheld shower head to the other end of the 60-inch hose. Ensure a washer is in place and hand-tighten.
7. **Mount the Handheld Shower Head:** Clean the wall surface where you intend to mount the adhesive bracket. Remove the protective film from the adhesive bracket and firmly press it onto the clean, dry wall. Allow it to set for 24 hours before placing the handheld shower head in it.
8. **Test for Leaks:** Slowly turn on the main water supply and check all connections for leaks. If any leaks are detected, tighten the connection slightly until the leak stops.



Image: Step 1 of installation, showing preparation of the shower arm.



Image: Step 2 of installation, showing the 3-way water diverter being screwed onto the shower arm.



Image: Step 3 of installation, showing the extension arm being attached to the diverter.



Image: Step 4 of installation, showing the rainfall shower head connected to the extension arm.



Image: Step 5 of installation, showing the handheld shower hose connected to the diverter.

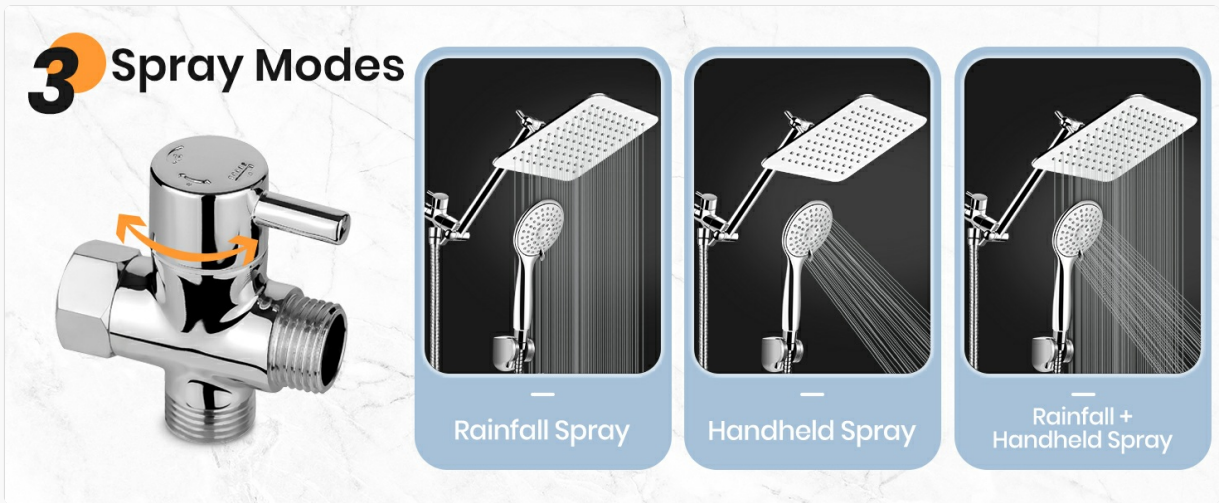


Image: Step 6 of installation, showing the handheld shower head attached to the hose.

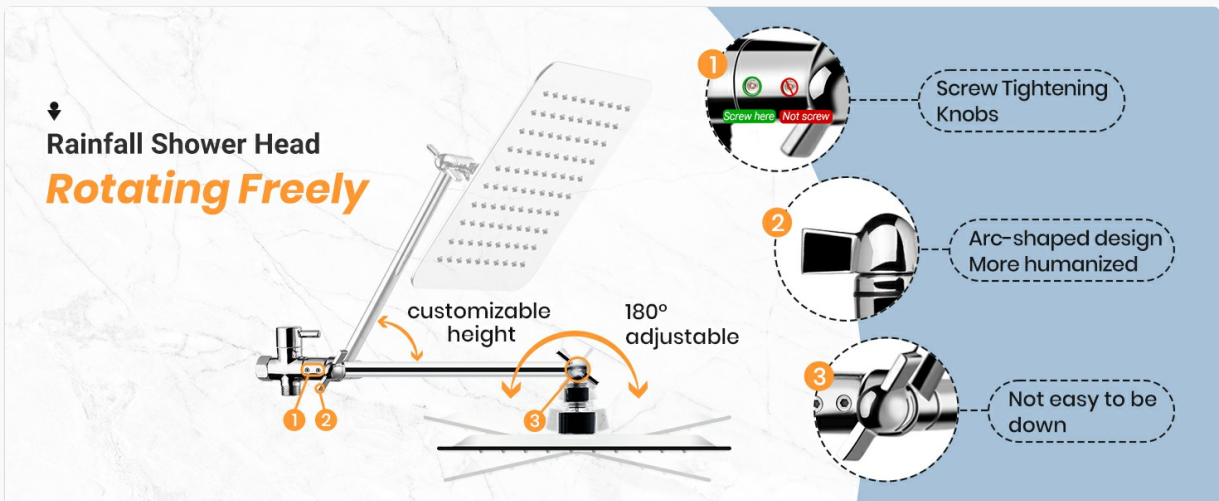


Image: Step 7 of installation, showing the adhesive bracket for the handheld shower head.



Image: Step 8 of installation, showing the completed installation and testing for leaks.

Installation Video Reference

For a visual guide, please refer to the official installation video:

Video: Official COSYLAND installation guide for the Rainfall Shower Head with Handheld Combo.

Operating Instructions

Your COSYLAND shower head combo offers versatile showering options:

- **Rainfall Shower Head:** The 10-inch rainfall shower head provides a wide, even spray for a full-body shower experience. It features 360-degree rotation and angle adjustment for optimal positioning.
- **Handheld Shower Head:** The handheld shower head offers 5 distinct spray modes, allowing you to customize your shower experience. It is ideal for targeted rinsing, bathing children, washing pets, or cleaning the shower area.
- **3-Way Water Diverter:** Use the lever on the 3-way water diverter to switch between the rainfall shower head, the handheld shower head, or both simultaneously. Rotate the lever 180 degrees to select your desired spray mode.

► Rainfall Shower Head *Rotating Freely*

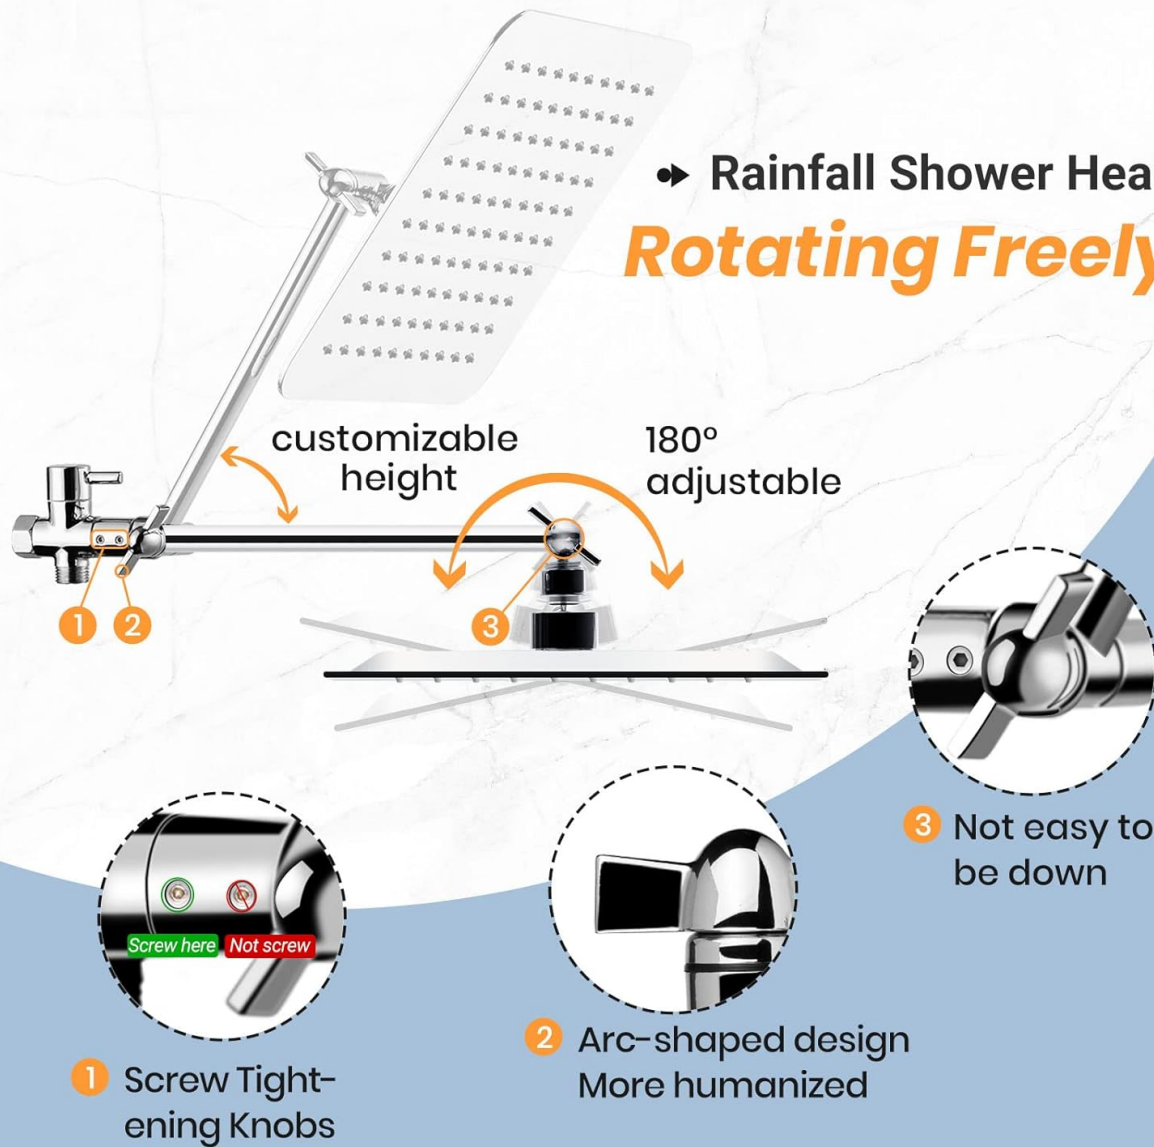


Image: Close-up of the rainfall shower head, highlighting its features and spray pattern.



Image: The handheld shower head, illustrating its multiple spray settings.

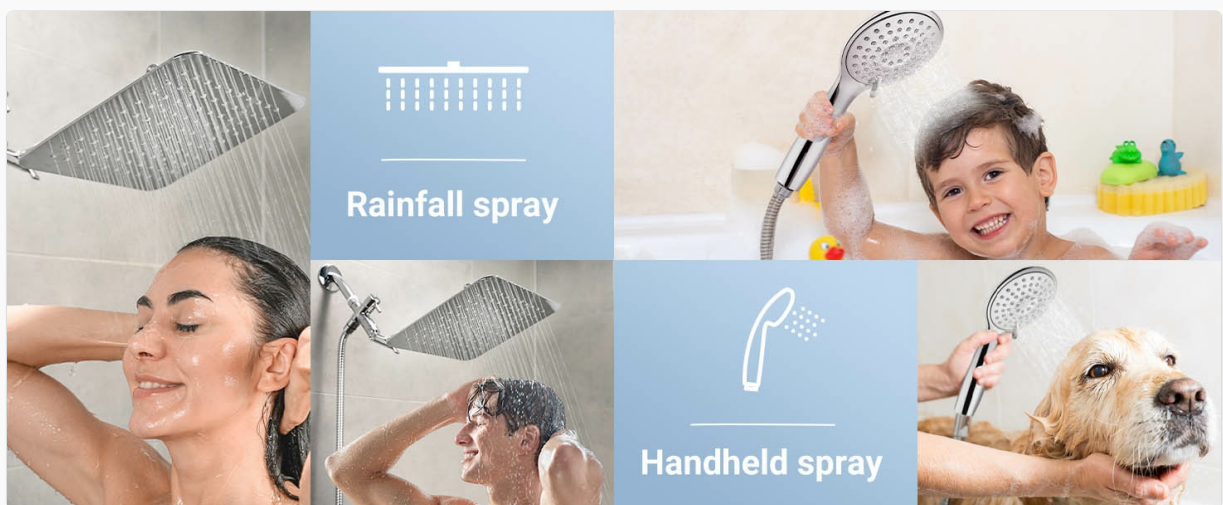


Image: Diagram showing the 3-way water diverter and its function to switch between shower modes.

Maintenance

Regular maintenance ensures optimal performance and extends the life of your shower head combo.

- **Cleaning Nozzles:** The shower heads feature self-cleaning silicone jets that prevent lime scale build-up. To clean, simply rub your finger across the nozzles to dislodge any mineral deposits.
- **General Cleaning:** Clean the chrome finish with a soft cloth and mild soap or a non-abrasive bathroom cleaner. Avoid harsh chemicals or abrasive scrubbers, as these can damage the finish.
- **Filter Maintenance:** Periodically check the filter and washer at the connections for any debris or wear. Clean or replace as needed to maintain water flow and prevent leaks.

Troubleshooting

Problem	Possible Cause	Solution
Water leaks from connections	Loose connections, worn/missing washers, insufficient plumber's tape.	Ensure all connections are hand-tightened. Add more plumber's tape. Check and replace washers if damaged or missing.
Low water pressure	Clogged nozzles, debris in filter, water flow restrictor (if installed).	Clean the silicone nozzles. Check and clean the filter. Ensure any water flow restrictors are properly installed or removed according to local regulations.
Diverter not switching properly	Internal debris, stiff mechanism.	Flush the system by running water through both heads. If persistent, contact customer support.
Handheld shower head falls from bracket	Adhesive not fully cured, surface not clean, bracket damaged.	Ensure surface is clean and dry before applying adhesive bracket. Allow 24 hours for adhesive to cure. Replace bracket if damaged.

Specifications

- **Brand:** COSYLAND
- **Model Number:** CS0001
- **Rainfall Shower Head Size:** 10 inches
- **Handheld Shower Head Settings:** 5
- **Extension Arm Length:** 11 inches
- **Hose Length:** 60 inches
- **Material:** Stainless Steel (hose), TPR and ABS (shower heads), Brass core (diverter)
- **Finish Type:** Chrome, Polished
- **Installation Type:** Wall Mounted
- **Pipe Thread Standard:** 1/2 inch

Warranty and Support

For any questions, concerns, or warranty claims regarding your COSYLAND shower head combo, please contact our customer support team. Refer to your purchase documentation for specific warranty details and contact information.

We are committed to providing high-quality products and excellent customer service.

