



键盘用户手册

TOP 75B

User Manual
Benutzerhandbuch


快速开始指南 ►
Quick Start Guide



感谢您购买及使用本产品

为了给您带来更好的使用体验，在使用产品前请仔细阅读本说明书，并请妥善保管，以便日后参观。

产品介绍

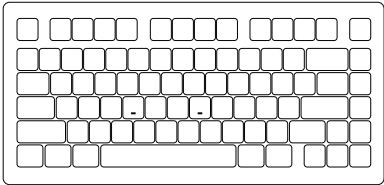

包装内容



系统需求

Windows®XP / Vista / 7 / 8 / 10或更高版本


安装步骤

将键盘USB连接线插入电脑的USB接口即可开始使用。

独立指示灯


状态	指示灯位置	回连	配对	连接成功
BT1	按键E灯	蓝灯慢闪	蓝灯快闪	蓝灯常亮2s熄灭
BT2	按键R灯	蓝灯慢闪	蓝灯快闪	蓝灯常亮2s熄灭
BT3	按键T灯	蓝灯慢闪	蓝灯快闪	蓝灯常亮2s熄灭
2.4G	按键Y灯	绿灯慢闪	绿灯快闪	绿灯常亮2s熄灭
有线	按键U灯	无	无	红灯常亮2s熄灭
状态	指示灯位置	指示方式		
低电	空格键位灯	红灯慢闪		
充电		绿灯常亮		
充满		熄灭		
Caps	Caps按键灯位	白灯常亮		
锁WIN	左WIN键灯位	白灯常亮		

TOP 75B 组合键功能

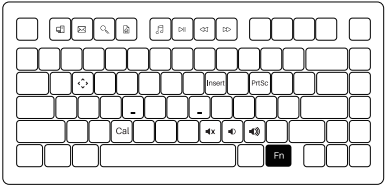


Fn+	F1		我的电脑
	F2		电子邮件
	F3	=	Windows搜索
	F4		浏览器主页
	F5		多媒体播放器
Fn+	F6		播放 / 暂停
	F7		上一首
	F8	=	下一首
	P		Prtsc
	C		计算器
Fn+	I		Insert
	M		静音
	<	=	音量减小
	>		音量增加
	W		将WASD与 ↑ ↓ ← → 键对调

TOP 75B 系统功能 (Windows)

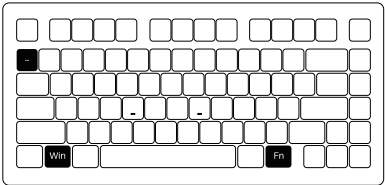

锁Win键	恢复出厂设置
Fn + 左Win	长按 Fn + ~ 5秒

TOP 75B 系统功能 (Mac)

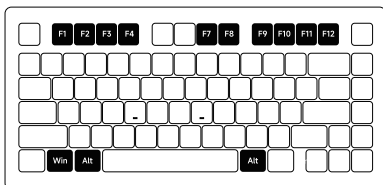

F1	降低显示屏亮度
F2	增加显示屏亮度
F3	开放任务控制
F4	呼出Siri
F7	上一曲


F8	播放/暂停
F9	下一曲
F10	静音
F11	调低音量
F12	调高音量

左 Win	Option
-------	--------

左 Alt	Command
-------	---------

右 Alt	Command
-------	---------


TOP 75B 灯光调节

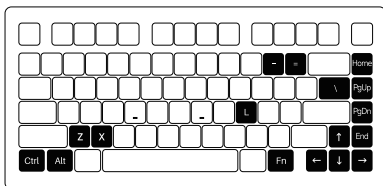

Fn+	Home	=	常亮、涟漪、如影随形、川流不息、流星
	PgUp		繁星点点、霓虹、光波、层出不穷、彩泉涌动
	PgDn		斜风细雨、踏雪无痕、聚合、一石二鸟、百花争艳
	End		呼吸、极光、正弦波、雨滴、峰回路转
	↑		灯光变亮
	↓		灯光变暗
	←		灯光方向向左

Fn+	→	=	灯光方向向右
	-		灯光速度变慢
	=		灯光速度变快
	L		灯光关闭/开启
	\		切换背光致7种单色+RGB循环
	Z		侧边灯光亮度切换, 5档, 循环
	X		侧边灯光速度切换, 5档, 循环
	左Ctrl		侧边灯光模式切换, 包括关闭 共6种
	左Alt		侧边灯光模式, 调节灯光颜色致7色单色+RGB循环

TOP 75B 连接使用指南

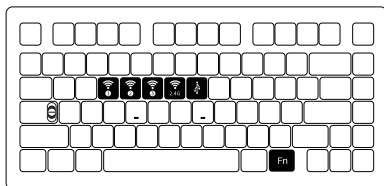

Fn+	E	=	蓝牙设备1		短按回连 长按配对
	R		蓝牙设备2		
	T		蓝牙设备3		
	Y		2.4G无线设备		
	U		有线模式		

	上: MAC (内置电源开)
	中: Windows (内置电源关)
	下: Windows (内置电源开)

开关位于CAPS按键右侧

蓝牙配对

键盘开机后，按下FN+E/R/T进入蓝牙模式，长按FN+E/R/T组合键3S，键盘进入对码状态，蓝色指示灯快闪，连上后指示灯常亮2S，如果没有连上设备指示灯熄灭，键盘进入睡眠。

2.4G配对

键盘开机后，按下FN+Y进入2.4G模式，再按下FN+Y组合键3S进入配对模式后，插入接收器，指示灯快闪，配对成功后退出对码，模式灯常亮2S，找不到配对设备30s后，退出对码模式灯熄灭，键盘进入睡眠。

电量查询

在无线模式下，按Fn+空格组合键可检查电池电量。如果电池电量低于30%，数字1-2键将显示红灯。如果电池电量低于100%，数字1-9键将显示绿灯，电池电量充满则数字1-0键显示绿灯。

1	2	3	4	5	6	7	8	9	0
低于30%	低于40%	低于50%	低于60%	低于70%	低于80%	低于90%	低于100%	充满	

亮红灯

亮绿灯

按键/灯光自定义说明和调用说明

1. 键盘三种工作模式下均可连接驱动并进行灯光和按键自定义
2. 键盘三种工作模式下可搭配驱动实现音乐律动
3. 请在我司官网下载“Akko Cloud”驱动
4. 驱动下载地址www.akkogear.com

AKKO保修和服务声明

1. Akko为中国大陆的客户提供一个保修。对于其他地区，请联系您的卖家（Akko分销商）以了解具体的保修政策。
2. 如果保修期到期，客户需要支付维修费用。如果用户喜欢自己修理键盘，Akko也会提供说明。用户应对自行修复过程中发生的任何损失承担全部责任。
3. 由于私自拆卸产品、使用不当和安装不当而导致的缺陷不在保修范围内。
4. 官方售后服务时间为每周一至周五上午10:00至下午18:00
节假日以国家法定节假日休息为准。
5. 退货和保修政策在不同的平台上可能有所不同，并在购买时取决于具体的经销商。

公司：深圳银宸科技有限公司

地址：深圳市宝安区松岗街道碧头第一工业区朗碧路33号

电话：0755-23216420

网址：www.akkogear.com

产地：中国·深圳

Company: Shenzhen Yincheng Technology Co., Ltd

Address: 33 Langbi Rd, Bitou First Industrial Zone, Bao'an District, Shenzhen, China




中国制造 / Made in China



注意 事项

人为损坏不局限于键盘进水、高处坠落、过度用力拉扯线材等，键盘为电子产品
请按照电子产品保护方式爱惜使用。

Packing List

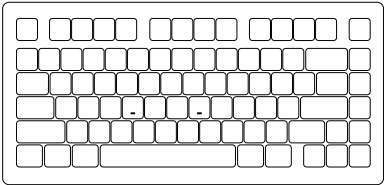

Minimum System Requirement

Windows®XP / Vista / 7 / 8 / 10 or higher version


Connectivity Method

Connect the keyboard to your computer by plugging in the USB cable into an available USB-A port to start using it.

LED Indicator Overview

Status	Indicator	Re-Connecting	Pairing	Connected
Bluetooth device 1	LED for Key E	Blue light blinks slowly	Blue light blinks fast	Blue light stays on for 2 seconds and then turns off
Bluetooth device 2	LED for Key R	Blue light blinks slowly	Blue light blinks fast	Blue light stays on for 2 seconds and then turns off
Bluetooth device 3	LED for Key T	Blue light blinks slowly	Blue light blinks fast	Blue light stays on for 2 seconds and then turns off
2.4G wireless device	LED for Key Y	Green light blinks slowly	Green light blinks fast	Green light stays on for 2 seconds and then turns off
Wired	LED for Key U	N/A	N/A	Red light stays on for 2 seconds and then turns off
Status	Indicator	Indicating Mode		
Low Battery	Independent LED Indicator (near spacebar)	Red light blinks slowly		
Charging		Steady Green		
Fully Charged		Light Off		
Caps	LED for Caps Key	Steady White		
Lock WIN	LED for left Win Key	Steady White		

TOP 75B HotKeys

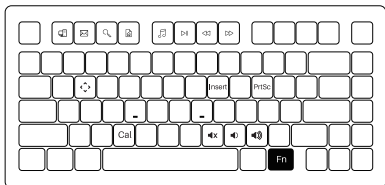


Fn+	F1	=	My Computer
	F2		E-mail
	F3		Windows Search
	F4		Browser Homepage
	F5		Media

Fn+	F6	=	Pause/Playback
	F7		Previous Song
	F8		Next Song
	P		Print SCR
	C		Calculator

Fn+	I	=	Insert
	M		Mute
	<		Decrease Volume
	>		Increase Volume
	W		Swap W A S D with ↑ ↓ ← →

TOP 75B System Commands (Windows)

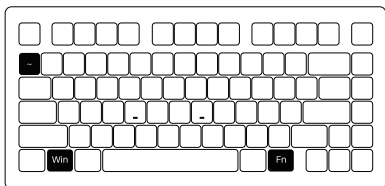


Lock Windows Key

Press Fn and
left Win Key

Restore Factory Settings

Hold down Fn and
press ~ Key for 5S

TOP 75B System Commands (Mac)

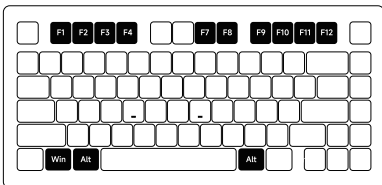

F1	Decrease display brightness
F2	Increase display brightness
F3	Open mission control
F4	Activate Siri
F7	Skip back (Audio)


F8	Pause/Play (Audio)
F9	Skip forward (Audio)
F10	Mute
F11	Volume down
F12	Volume up

Left Win	Option
----------	--------

Left Alt	Command
----------	---------

Right Alt	Command
-----------	---------


TOP 75B Backlight Settings

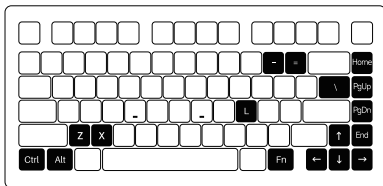


Fn+	Home	=	Effect 1-Effect 5
	PgUp		Effect 6-Effect 10
	PgDn		Effect 11-Effect 15
	End		Effect 16-Effect 20
	↑		Bright
	↓		Dim
	←		Set animation direction to left

Fn+	→		Set animation direction to right
	-		Slower Animation
	=		Faster Animation
	L		Light Off/On
	\	=	This shortcut allows you to set the backlight color to 7 single color with RGB loop effect
	Z		Adjust side LED brightness (5 levels)
	X		Adjust side LED animation speed (5 levels)
	Left Ctrl		Adjust side LED mode, including Lights OFF (6 levels)
	Left Alt		Side LED mode: This shortcut allows you to set the light to 7 single colors with an RGB loop effect

TOP 75B Connection Guide

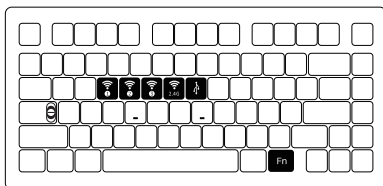

Fn+	E		Bluetooth Device 1		Short press to link back Long press to pair
	R		Bluetooth Device 2		
	T	=	Bluetooth Device 3		
	Y		2.4G Wireless Device		
	U		Wired Mode		

 <p>The switch is located under the CAPS key</p>	Top: Mac (built-in power supply on)
	Middle: Default Windows (built-in power supply off)
	Bottom: Windows (built-in power supply on)

Bluetooth Pairing

After turning on the keyboard, press FN+E/R/T to enter Bluetooth mode, Press and hold the FN+E/R/T Key combination for 3 seconds to enter pairing mode, with the blue indicator light flashing quickly. Once the connection is established, the indicator light will stay on for 2 seconds. If the device fails to connect, the indicator light will turn off and the keyboard will enter sleep mode.

2.4G Pairing

After turning on the keyboard, press FN+Y to enter 2.4G mode. Then press and hold the FN+Y Key combination for 3 seconds to enter pairing mode. Then insert in the receiver, and the indicator light will flash quickly. Once the pairing is successful, the LED indicator will stay on for 2 seconds. If no available device is found within 30 seconds, the LED indicator will turn off and the keyboard will enter sleep mode.

Battery Level Check

Press the Fn + Space Key combination to check the battery level while in wireless mode. If the battery level is below 30%, the LED for number keys 1-2 will turn red. If it's between 30-100%, the LED for number keys 1-9 will show a green light. And when the battery is fully charged, the LED for number keys 1-0 will show a green light.

1	2	3	4	5	6	7	8	9	0
Less than 30%	Less than 40%	Less than 50%	Less than 60%	Less than 70%	Less than 80%	Less than 90%	Less than 100%	Full charged	
Red light					Green light				

Key/Lighting Effects Customization Instruction

1. The keys can be remapped and RGB can be programmed in the driver in any of the connection mode
2. Keyboard lighting can be coordinated with the driver to achieve audio visualizer
3. Please download the Akko Cloud driver on our website
4. Users can download the driver via en.akkogear.com

Akko Warranty and Service Statement

1. Akko provides One-Year warranty for customers in mainland China. For other regions, please contact your seller (Akko distributor) for specific warranty policy.
2. If the warranty window expires, customers need to pay for repairs. Akko will also provide instructions if users prefer to repair the keyboard by themselves.
However, users shall take full responsibility for any loss happened during self-repair.
3. Defects resulting from disassembly of our product, improper usage and incorrect installation are not covered by warranty.
4. The return and warranty policy may vary in different platforms and are subject to the specific distributor at the time of purchase.

Company: Shenzhen Yinchon Technology Co., Ltd

Address: 33 Langbi Rd, Bitou Community 1st Industrial Zone, Bao'an District, Shenzhen, China

Tel: 0755-23216420

Website: www.akkogear.com

Origin: Shenzhen, China



WARNING:
Water and Beverages can't be
poured into the Keyboard.



中国制造 / Made in China



[instagram.com/akkogear](https://www.instagram.com/akkogear)



[facebook.com/akkogear](https://www.facebook.com/akkogear)



[tiktok.com/@akkogear](https://www.tiktok.com/@akkogear)

Precautions

Man-made damage is not limited to immersion, falling off, and pulling off the wires with excessive forces, etc.

