

[Manuals.plus](#) /

> [VINGLI](#) /

> VINGLI Window Awning Door Canopy Instruction Manual (40x80 Inch, Clear Board & Black Bracket)

VINGLI B08TZW8RV1 (40x80 Inch)

VINGLI Window Awning Door Canopy Instruction Manual

Model: 40x80 Inch, Clear Board & Black Bracket (ASIN: B08TZW8RV1)

INTRODUCTION

This manual provides detailed instructions for the assembly, installation, operation, and maintenance of your VINGLI Window Awning Door Canopy. Please read all instructions carefully before beginning installation to ensure proper function and safety. This awning is designed to provide protection from rain, snow, sun, and harmful UV rays for your doors and windows.

SAFETY INFORMATION

Caution: Proper installation is crucial for safety and performance. Two-person installation recommended. Ensure secure anchoring to withstand weather conditions. Not suitable for areas with extreme wind conditions. Follow all installation instructions carefully.

Always wear appropriate safety gear, such as gloves and eye protection, during assembly and installation. Verify that the mounting surface is structurally sound and capable of supporting the awning's weight and potential snow/wind loads. If unsure, consult a qualified professional.

PACKAGE CONTENTS

Please verify that all components are present before beginning assembly:

- Polycarbonate Hollow Sheets (Clear Board)
- ABS Brackets (Black)
- Aluminum Bars (Front and Back)
- Sealing Strips
- Expansion Bolts/Screws and Washers
- Instruction Manual

If any parts are missing or damaged, please contact VINGLI customer support.

SPECIFICATIONS

Feature	Detail
Material	Acrylonitrile Butadiene Styrene, Aluminum, Polycarbonate
Color	Clear Board & Black Bracket
Size	40x80 Inch
Item Weight	16.5 Pounds
Projection Distance	40 Inches
Minimum Clearance	9.05 Inches
Operation Mode	Manual
Required Assembly	Yes

SETUP AND INSTALLATION

The VINGLI Window Awning is designed for straightforward installation, but two people are recommended for ease and safety. Ensure you have all necessary tools before starting.

1. Pre-Installation Checks

- **Measure Your Space:** Ensure the awning is wider than your door or window opening. Allow at least 15 inches between the top of the awning and the top of the door frame for proper clearance.
- **Surface Compatibility:** This product is not suitable for vinyl siding. Ensure your mounting surface is solid and can support the awning.



Dimension

Note : This product is not suitable for vinyl siding

Image: Awning dimensions and recommended clearance for installation. The awning measures 78.7 inches wide and 10.2 inches high from the bracket top to the bottom curve. The projection distance is 37.4 inches. Ensure at least 15 inches clearance above the door frame.

2. Assembly Steps

1. Attach the polycarbonate sheets to the ABS brackets using the provided aluminum bars and sealing strips. The sheets can be set diagonally into the brackets.
2. Ensure all connections are secure and leak-proof. The aluminum connector design helps prevent water leakage at the joints.

LEAK-PROOF ALUMINUM CONNECTOR



Image: Close-up view of the leak-proof aluminum connector, highlighting its design to prevent water seepage compared to other designs.

EASY TO CONNECT AND INSTALL

- ☒ Detailed instruction and tools are included
- ☒ Time-saving and effortless installation

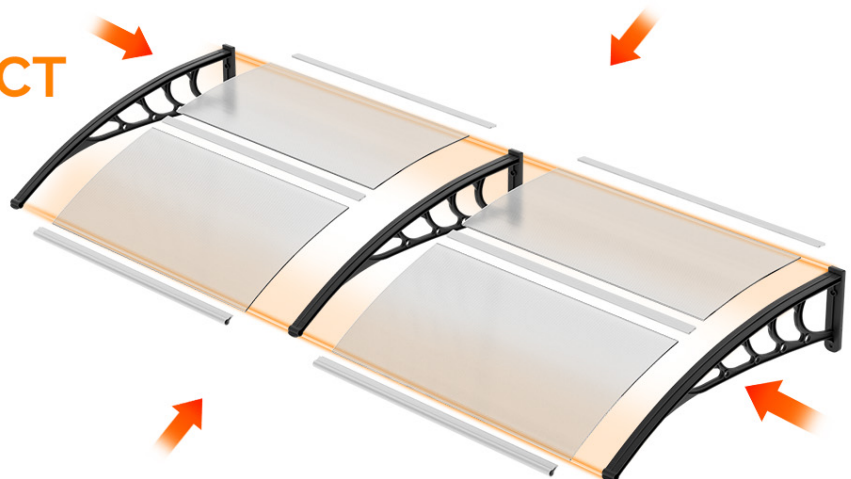


Image: Diagram illustrating the easy connection and installation process of the awning components, emphasizing time-saving and effortless installation.

3. Wall Mounting

1. Position the assembled awning against the wall at the desired height. Use a level to ensure it is straight.
2. Mark the drilling points through the bracket holes.
3. Drill pilot holes into the wall. Insert the expansion bolts/screws and secure the awning firmly to the wall. Ensure all screws are tightened to prevent movement.

Your browser does not support the video tag.

Video: Official VINGLI installation guide for the Window Awning Door Canopy. This video demonstrates the assembly and mounting process, providing visual aid for each step.

OPERATING

Once installed, your VINGLI Window Awning Door Canopy operates passively, providing continuous protection. It is a fixed structure designed to shield your doors and windows from various weather conditions.

- **Sun Protection:** The polycarbonate panel offers UPF 50+ sun protection, reducing direct sunlight and harmful UV rays.
- **Rain and Snow Protection:** The canopy diverts rain and snow away from your entryways, keeping them dry and secure.

SUN AND RAIN PROTECTION

Excellent Light Transmisson

VINGLI



Image: An installed awning demonstrating its function in providing sun and rain protection for a doorway, highlighting its excellent light transmission.

MAINTENANCE

Regular maintenance will help prolong the life and appearance of your VINGLI Window Awning Door Canopy.

- **Cleaning:** Clean the polycarbonate panels periodically with mild soap and water. Use a soft cloth or sponge to avoid scratching the surface. Rinse thoroughly with clean water. Avoid abrasive cleaners or harsh chemicals.
- **Inspection:** Annually inspect all mounting hardware for tightness. Re-tighten any loose screws to ensure the awning remains securely attached to the wall. Check for any signs of wear or damage to the brackets or panels.
- **Snow Removal:** While the awning is designed to withstand snow, heavy accumulation should be gently removed to prevent excessive stress on the structure, especially in regions with heavy snowfall.

TROUBLESHOOTING

Here are some common issues and their potential solutions:

- **Awning feels unstable after installation:**

Check all mounting screws and bolts. Ensure they are securely fastened to a solid surface. If installed on an unsuitable surface (e.g., vinyl siding), re-installation on a proper surface may be necessary.

- **Water leakage at joints:**

Verify that the aluminum connectors and sealing strips are correctly installed and fully seated. Re-adjust or re-seal if necessary.

- **Panels appear dirty or discolored:**

Clean the panels as described in the Maintenance section. For internal discoloration (e.g., from trapped debris in hollow sheets), this may indicate a sealing issue or long-term exposure.

- **Awning makes noise during rain:**

The hollow polycarbonate panels may produce some noise when rain falls on them. This is a characteristic of the material and generally not a defect.

If you encounter issues not listed here or require further assistance, please contact VINGLI customer support.

WARRANTY AND SUPPORT

For warranty information and customer support, please refer to the documentation included with your purchase or visit the official VINGLI website. Typically, VINGLI products are covered by a manufacturer's warranty against defects in materials and workmanship. Please retain your proof of purchase for warranty claims.

Contact Information:

For assistance, please visit the [VINGLI Store on Amazon](#) or contact VINGLI-Direct through your purchase platform.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B08TZW8RV1>

More documents and user manuals: **<https://manuals.plus/>**