**Saved from manuals.plus.**
**Open the live page for links to other documents and user manuals.**



## YINVANI DS01-MB487610

# YINVANI Frameless Shower Door Instruction Manual

Model: DS01-MB487610
Brand: YINVANI

## Product Overview

The YINVANI Frameless Double Sliding Shower Door (Model DS01) offers a modern and functional solution for your bathroom. Designed for durability and ease of use, it features high-quality materials and innovative design elements to enhance your showering experience.



Figure 1: YINVANI Frameless Double Sliding Shower Door (Model DS01)

## Key Features:

- **Adjustable Width:** Designed to fit openings from 46" to 48" wide, with a height of 76".
- **Premium Materials:** Constructed with SGCC Certified 3/8" (10 mm) clear tempered glass and 304 stainless steel hardware for durability and strength.
- **Smooth & Quiet Operation:** Features eccentric design rollers for noiseless and effortless sliding.
- **Enhanced Safety:** Equipped with an anti-collision structure and explosion-proof film on the glass to prevent shattering and injury.
- **Waterproof Design:** Includes a protective nano waterproof coating, high-quality side and bottom seals, and a stainless steel waterproof threshold to prevent leaks.
- **Integrated Towel Bars:** Each door features a convenient towel bar that also serves as a handle.

## Safety Information

Please read all instructions carefully before installation and use. Failure to follow these instructions may result in injury or product damage.

- Always wear safety glasses during installation.
- Handle glass panels with extreme care. Tempered glass, while strong, can shatter if struck at the edges.
- Ensure the installation surface (walls, floor) is structurally sound and level.
- Use appropriate tools and hardware for your specific wall type.
- Two people are recommended for installation due to the weight and size of the glass panels.
- Do not overtighten screws, as this may damage components or glass.
- Apply silicone sealant as instructed to ensure a watertight seal. Allow adequate curing time before use.

## Tools Required for Installation

- Drill (with 5/16 inch and 1/4 inch drill bits)
- Caulk Gun and Silicone Sealant
- Saw (for cutting bottom threshold if needed)
- Measuring Tape
- Pencil
- Level
- Screwdriver (Phillips head)
- Allen Key Set (included with hardware)

## Installation Guide

This section provides a step-by-step guide for installing your YINVANI Frameless Double Sliding Shower Door. For a visual demonstration, please refer to the official installation video below.

▶ **Watch video online**
How to Install Double Sliding Shower Door YINVANI DS01

Video 1: How to Install Double Sliding Shower Door YINVANI DS01. This video provides a comprehensive visual guide for the installation process.

### Step-by-Step Installation:

1. **1. Prepare the Wall Brackets:**
   Mark the desired height for the top rail. Use a level to ensure the marks are perfectly horizontal. Position the wall brackets and mark the drilling points. Drill holes using a 5/16 inch drill bit. Insert wall anchors into the drilled holes. Secure the wall brackets using the provided screws.



Figure 2: Marking and drilling for wall brackets.

2. **2. Install the Top Rail:**
   Measure the distance between the installed wall brackets. If necessary, cut the top rail to fit the opening. Insert the anti-jumping system components into the top rail. Secure the top rail to the wall brackets using the provided screws and Allen key.




Figure 3: Anti-jumping system integrated into the top rail.

3. **3. Install the Bottom Guide Block and Threshold:**
   Determine the correct position for the bottom guide block, ensuring it aligns with the top rail. Mark the drilling points. Drill holes using a 1/4 inch drill bit. Secure the guide block. Measure and cut the bottom threshold to fit the shower opening. Apply silicone sealant to the underside of the threshold and firmly press it into place.

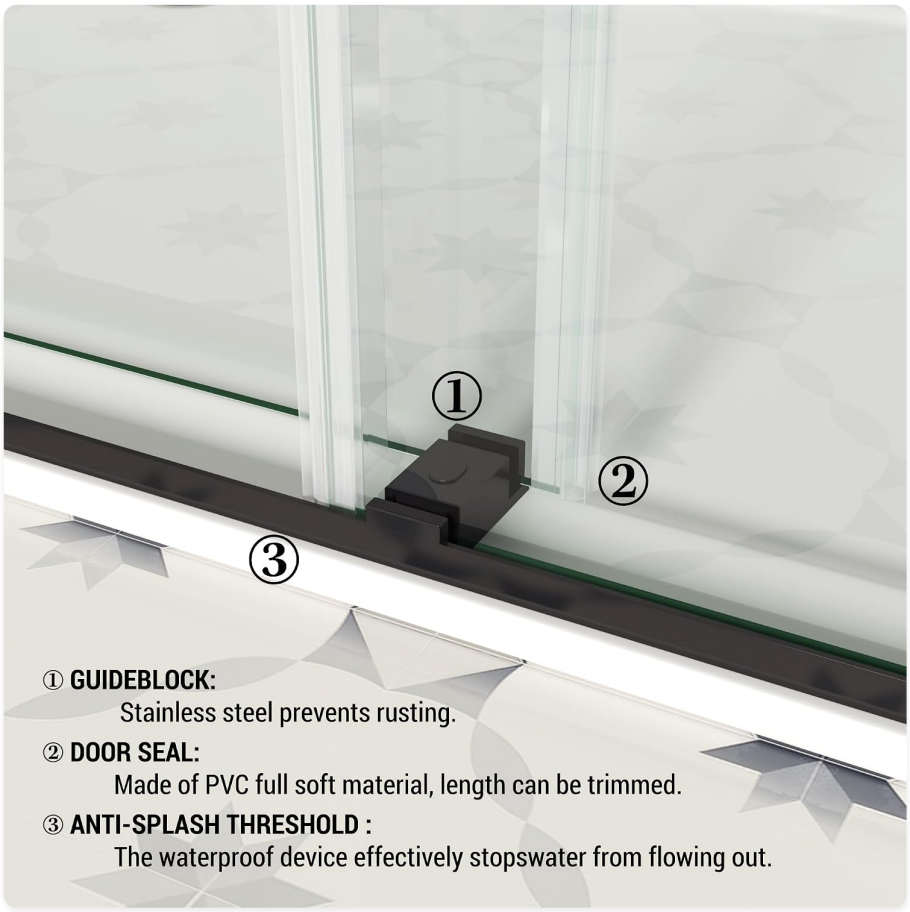


Figure 4: Bottom guide block and threshold components.

4. **4. Hang the Glass Panels:**
   Attach the rollers to the top edge of each glass panel. Carefully lift and hang the glass panels onto the top rail, ensuring the rollers are properly seated. Adjust the eccentric rollers as needed to ensure the glass panels are plumb and parallel to the wall, accommodating any wall offsets.



Figure 5: Unique eccentric roller design for easy adjustment.




Figure 6: Large sturdy stainless-steel rollers for smooth operation.

5. **5. Install Towel Bars and Seals:**
   Attach the towel bars to the designated holes on the glass panels. Install the side and bottom seals onto the glass panels to ensure a watertight enclosure. The bottom seals can be trimmed if necessary.



Figure 7: Integrated towel bar for convenience.




Figure 8: Seal-thru Technology for water prevention.

6. **6. Final Adjustments and Sealing:**
   Perform any final adjustments to ensure smooth sliding and proper alignment of the doors. Apply a continuous bead of silicone sealant along the exterior joints of the shower door system where it meets the wall and floor. Allow the sealant to cure completely (typically 24-48 hours) before using the shower.

## Operating Instructions

Your YINVANI shower door is designed for smooth and effortless operation.

- To open or close the door, gently push or pull the integrated towel bar/handle.
- The double sliding design allows either panel to be moved for entry or exit.
- Avoid forcing the doors if they encounter resistance. Check for any obstructions on the track.

▶ **Watch video online**
YINVANI Double Sliding Shower Door DS01 Display

Video 2: YINVANI Double Sliding Shower Door DS01 Display. This video showcases the smooth operation and design of the shower door.

## Maintenance and Care

Proper maintenance will ensure the longevity and pristine appearance of your shower door.

- **Glass Cleaning:** The glass features a nano waterproof coating for easy cleaning. Use a soft cloth and mild, non-abrasive glass cleaner. Avoid harsh chemicals, abrasive pads, or scouring powders that can damage the coating or glass surface.
- **Hardware Cleaning:** Clean stainless steel hardware with a soft cloth and mild soap and water. Do not use abrasive cleaners or steel wool, as they can scratch the finish.
- **Seal Maintenance:** Regularly inspect the seals for any signs of wear or damage. Replace seals if they become brittle or discolored to maintain water tightness.
- **Roller Maintenance:** Periodically clean the rollers and tracks to remove soap scum or debris that could impede smooth operation. A small amount of silicone lubricant can be applied to the rollers if needed.
- **Preventing Water Spots:** To minimize water spots, wipe down the glass after each use with a squeegee or soft cloth.




Figure 9: YINVANI's treated glass resists water spots for easier cleaning.

## Troubleshooting

| Problem | Possible Cause | Solution |
| --- | --- | --- |

| Problem | Possible Cause | Solution |
|---|---|---|
| Door does not slide smoothly. | Debris in track, dirty rollers, misaligned rollers. | Clean the track and rollers. Check for proper alignment of eccentric rollers and adjust if necessary. |
| Water leakage from the bottom or sides. | Improperly installed seals, damaged seals, insufficient silicone sealant. | Ensure all seals are correctly installed and undamaged. Reapply silicone sealant where needed, allowing proper curing time. |
| Door appears crooked or not plumb. | Wall offset, rollers not adjusted correctly. | Use the eccentric roller adjustment feature to compensate for wall irregularities. Refer to installation step 4. |
| Noise during sliding. | Dry rollers, debris in track. | Clean the track and rollers. Apply a small amount of silicone lubricant to the rollers. |

## Specifications

| Attribute | Detail |
|---|---|
| Brand | YINVANI |
| Model Number | DS01-MB487610 |
| Dimensions (W x H) | 46"-48" W x 76" H (Adjustable) |
| Walk-in Width | 20.5"-23.5" |
| Glass Thickness | 3/8 inch (10 mm) |
| Glass Certification | SGCC Certified, ANSI Standard Tempered Glass |
| Material | Stainless Steel (Hardware), Tempered Glass |
| Finish | Matte Black |
| Assembly Required | Yes |
| UPC | 742723224508 |

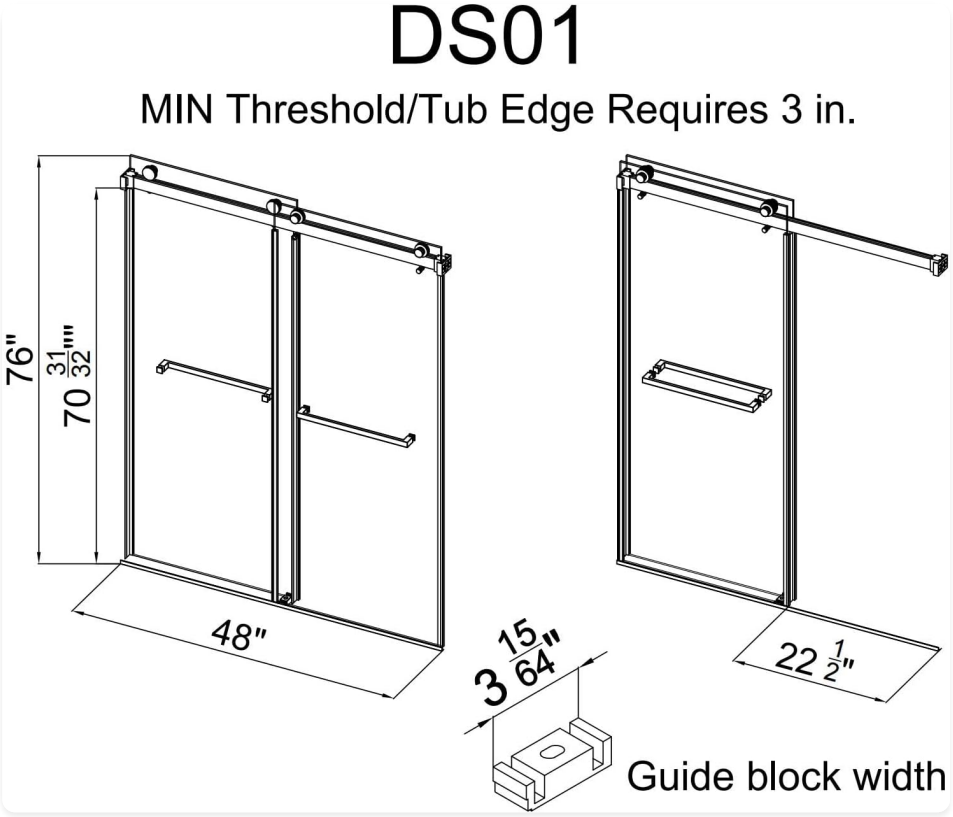


Figure 10: DS01 Shower Door Dimensions.

## Warranty and Support

YINVANI is committed to providing high-quality products and excellent customer service. Our shower doors come with sturdy wooden packaging that is impact and heavy pressure tested to ensure safe delivery.

If you encounter any installation problems, or if the glass accidentally breaks during installation, or any other issues arise, there is no need to return the product. Simply contact us, and we will assist you in solving the problem and arranging for a product replacement if necessary.

For support, please visit the official YINVANI store on Amazon or contact customer service through your purchase platform.

Visit the YINVANI Store on Amazon

© 2024 YINVANI. All rights reserved.

### Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

**Name**

Anonymous

**Email**

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

**Question**

Example: How do I reset this device or fix this error?

**Details**

Model number, symptoms, what you tried, or the section of the manual you are using.

**Submit question**

---

**Open the live page**

**https://manuals.plus/asin/B08VH8D1BK**

More documents and user manuals: **https://manuals.plus/**