

GLOBALO Nowimo 60.1 White

GLOBALO Built-in Kitchen Extractor Hood Instruction Manual

Model: Nowimo 60.1 White

Brand: GLOBALO

1. SAFETY INFORMATION

Please read these instructions carefully before installation and use of the appliance. Keep this manual for future reference. Incorrect installation or use may cause injury or damage.

- Ensure the electrical supply matches the voltage specified on the rating plate.
- Installation must be carried out by a qualified person in accordance with all local regulations and standards.
- Do not operate the hood without filters.
- Regularly clean the grease filters to prevent fire hazards.
- Do not flambé under the range hood.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- Children should be supervised to ensure that they do not play with the appliance.
- Adequate ventilation must be provided in the room when the range hood is used at the same time as appliances burning gas or other fuels.

2. PRODUCT OVERVIEW

The GLOBALO Nowimo 60.1 White is a compact and discreet built-in extractor hood designed for integration into kitchen cabinets. It effectively removes cooking fumes and odors, ensuring clean air in your kitchen. The hood features LED lighting for illuminating your cooking area and offers three power levels for optimal air extraction.



Image: Front view of the GLOBALO Nowimo 60.1 White built-in extractor hood, showing the white lacquered steel finish, control buttons, LED lights, and the aluminum grease filter.

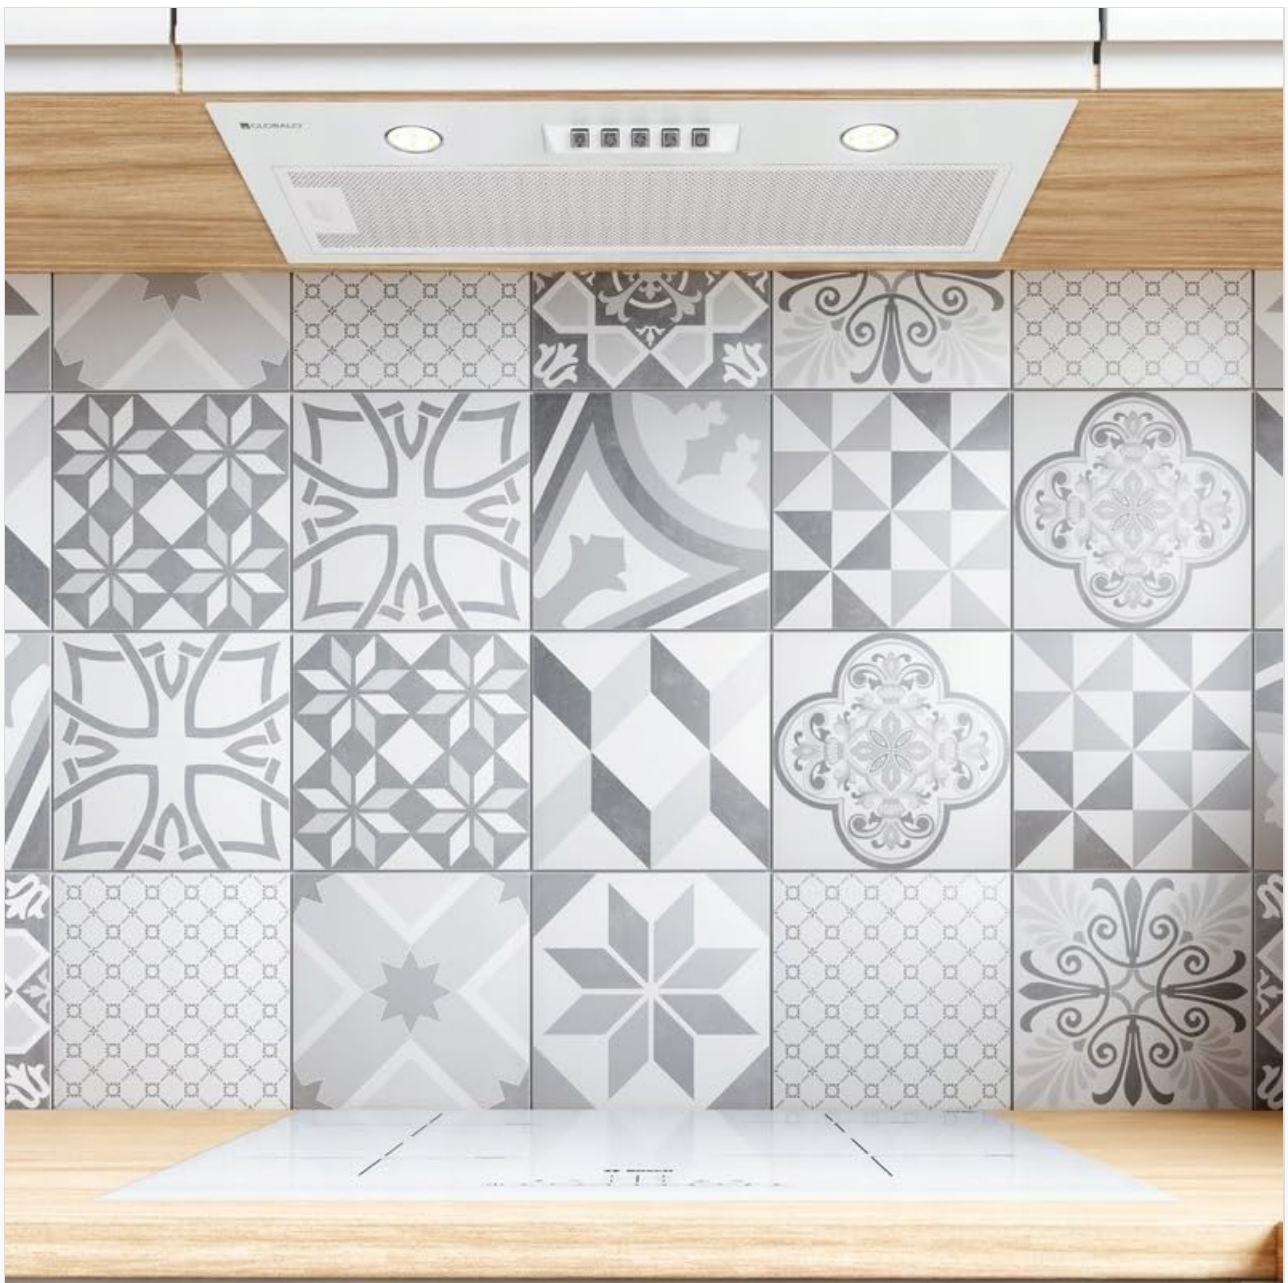


Image: The GLOBALE Nowimo 60.1 White hood seamlessly integrated into a white kitchen cabinet above a stovetop, demonstrating its discreet design and effective lighting.

Key Features:

- **Compact Design:** Ideal for integration into kitchen cabinets, suitable for various kitchen sizes.
- **Dual Operation Modes:** Can be used in extraction mode (ducted) or recirculation mode (absorber) with an optional charcoal filter.
- **Efficient Filtration:** Equipped with an aluminum grease filter to prevent grease buildup on kitchen surfaces. Optional charcoal filter for odor removal in recirculation mode.
- **Three Power Levels:** Adjustable fan speed to suit different cooking needs.
- **LED Lighting:** Two 3W LED strips provide bright illumination for the cooking area.
- **Push Button Controls:** Simple and intuitive operation.

3. SETUP AND INSTALLATION

The Nowimo 60.1 White hood is designed for built-in installation within a kitchen cabinet. It can operate in two modes: ducted (extraction) or recirculation (absorber). Ensure proper planning for ducting or charcoal filter installation before proceeding.

Dimensions and Mounting:

Refer to the dimension diagram for precise measurements required for cabinet cutout and mounting. The hood's compact size allows for flexible integration.

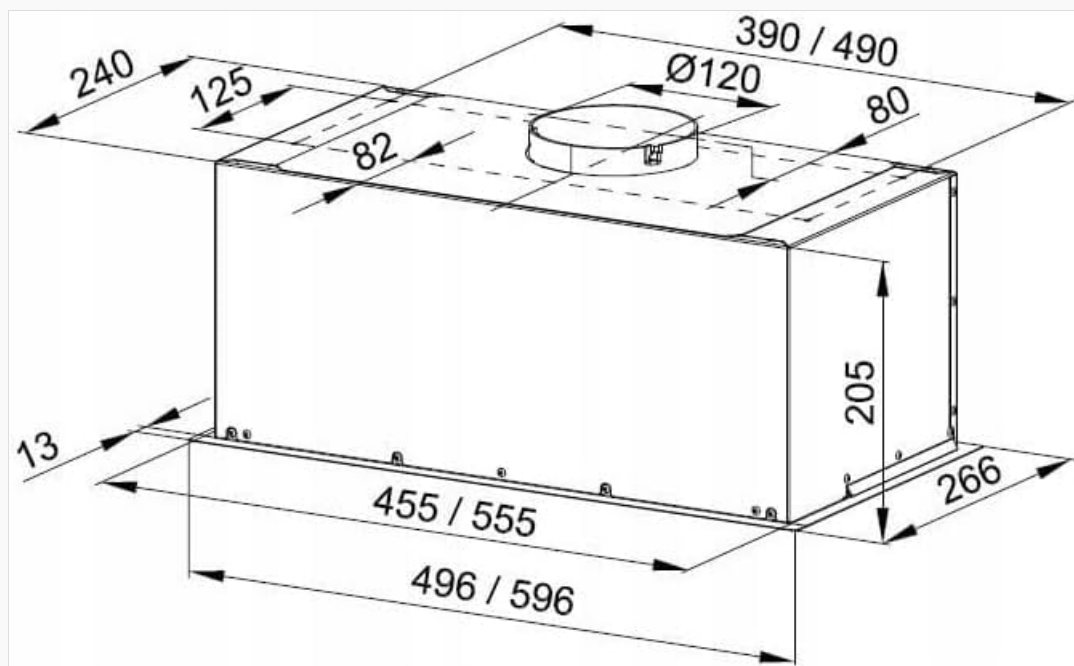


Image: Technical drawing showing the precise dimensions (in millimeters) of the GLOBALO Nowimo 60.1 White extractor hood, including width, depth, height, and ducting diameter, essential for proper cabinet integration.

Installation Steps (General Guidance):

1. **Prepare Cabinet:** Create the necessary cutout in your kitchen cabinet according to the provided dimensions.
2. **Ducting (if applicable):** Install the ducting system from the hood's outlet to the exterior of your home. Ensure the ducting is rigid and has minimal bends for optimal airflow.
3. **Charcoal Filter (if recirculation):** If operating in recirculation mode, install the optional ASC 450 charcoal filter (sold separately) as per its instructions.
4. **Mount Hood:** Secure the hood within the cabinet using appropriate fasteners.
5. **Electrical Connection:** Connect the hood to a suitable electrical supply, ensuring all connections are secure and comply with local electrical codes.
6. **Test Functionality:** Before final closure, test all functions of the hood (fan speeds, lighting) to ensure proper operation.

Note: For detailed installation instructions, refer to the specific installation guide provided with your product packaging. Professional installation is recommended.

4. OPERATING INSTRUCTIONS

The GLOBALO Nowimo 60.1 White extractor hood is operated via intuitive push buttons located on the front panel.

Controls:

- **Power On/Off Button:** Press to turn the hood on or off.
- **Fan Speed Buttons (1, 2, 3):** Select the desired fan speed.

- **Speed 1:** Low setting for light cooking or simmering.
- **Speed 2:** Medium setting for general cooking.
- **Speed 3:** High setting for heavy cooking, frying, or strong odors.
- **Light Button:** Press to turn the LED lights on or off.

Usage Tips:

- Turn on the hood a few minutes before you start cooking to create an air flow.
- Keep the hood running for about 5-10 minutes after cooking to clear any remaining fumes and odors.
- Adjust the fan speed according to the intensity of cooking and the amount of steam/fumes produced.

5. MAINTENANCE

Regular maintenance ensures the optimal performance and longevity of your GLOBALO extractor hood.

Cleaning the Aluminum Grease Filter:

The aluminum grease filter collects grease particles and should be cleaned regularly (approximately every 2-4 weeks, depending on usage) to maintain efficiency and prevent fire hazards.

1. **Switch Off:** Ensure the hood is switched off and disconnected from the power supply before cleaning.
2. **Remove Filter:** Locate the latch or clips holding the aluminum filter in place and carefully remove it.
3. **Clean Filter:** Wash the filter by hand in hot water with a mild detergent, or in a dishwasher (ensure no other items are washed simultaneously to avoid discoloration).
4. **Dry and Reinstall:** Allow the filter to dry completely before reinstalling it into the hood.

Replacing the Charcoal Filter (Recirculation Mode Only):

If your hood operates in recirculation mode, it uses an active charcoal filter (model ASC 450, sold separately) to remove odors. This filter cannot be washed and must be replaced periodically (typically every 3-6 months, depending on usage).

1. **Switch Off:** Ensure the hood is switched off and disconnected from the power supply.
2. **Access Filter:** Remove the aluminum grease filter to access the charcoal filter.
3. **Remove Old Filter:** Detach the old charcoal filter (it may twist or clip into place).
4. **Install New Filter:** Install a new ASC 450 charcoal filter, ensuring it is securely fitted.
5. **Reinstall Grease Filter:** Replace the aluminum grease filter.

General Cleaning:

Clean the exterior surfaces of the hood with a soft cloth and a mild, non-abrasive cleaning agent. Do not use corrosive or abrasive cleaners, as they may damage the lacquered steel finish.

6. TROUBLESHOOTING

Before contacting customer support, please refer to the following common issues and their potential solutions:

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
Hood not operating.	No power supply.	Check if the hood is plugged in and the circuit breaker is on.
Poor extraction performance.	Clogged grease filters.	Clean the aluminum grease filters.
	Clogged or saturated charcoal filter (recirculation mode).	Replace the charcoal filter (ASC 450).
	Improper ducting (extraction mode).	Check for kinks, blockages, or leaks in the ducting. Ensure ducting diameter is correct.
Lights not working.	LED lights faulty.	Contact customer support for replacement.
Excessive noise.	Loose components or improper installation.	Ensure all mounting screws are tight. Check for foreign objects in the fan.

If the problem persists after attempting these solutions, please contact GLOBALO customer support.

7. SPECIFICATIONS

Technical specifications for the GLOBALO Nowimo 60.1 White extractor hood:

Brand	GLOBALO
Model Number	NOWIMO_60_1_WHITE
Color	White
Material	Lacquered Steel (Alloy Steel)
Dimensions (L x W x H)	26.6 x 59.6 x 20.5 cm
Item Weight	5 Kilograms
Number of Speeds	3
Max. Airflow Capacity	320 m³/h
Noise Level	45 dB (min) to 61 dB (max)
Lighting Type	LED (2 x 3W)
Filter Type	Aluminum (grease), Charcoal (optional, ASC 450)
Control Type	Push Button
Energy Efficiency Class	E
Annual Energy Consumption	61.7 kWh/year

Voltage	240V
Mounting Type	Wall Mount (Built-in)

8. WARRANTY AND SUPPORT

For warranty information, please refer to the documentation provided with your purchase or contact your retailer. GLOBALO is committed to providing quality products and customer satisfaction.


If you encounter any issues not covered in the troubleshooting section, require spare parts, or need further assistance, please contact GLOBALO customer support through their official website or the contact information provided in your product packaging.

Note: Information regarding the availability of spare parts is currently unavailable through general product listings. Please contact the manufacturer directly for specific inquiries.




Related Documents - Nowimo 60.1 White

	Instrukcja obsługi i montażu okapu GLOBALO Calmio Isola 39 Szczegółowy przewodnik po instalacji, obsłudze i konserwacji okapu kuchennego GLOBALO Calmio Isola 39. Zawiera informacje o bezpieczeństwie, danych technicznych i rozwiązywaniu problemów.
	Instrukcja obsługi i montażu okapu kuchennego GLOBALO Roxano 39 Szczegółowa instrukcja obsługi i montażu okapu kuchennego GLOBALO Roxano 39. Zawiera informacje o bezpieczeństwie, danych technicznych, instalacji, konserwacji, rozwiązywaniu problemów i gwarancji.
	GLOBALO HEWENO 39 Wall Hood Operating and Installation Instructions This document provides comprehensive operating and installation instructions for the GLOBALO HEWENO 39 Wall Hood. It covers safety precautions, technical specifications, installation steps, maintenance, and troubleshooting.

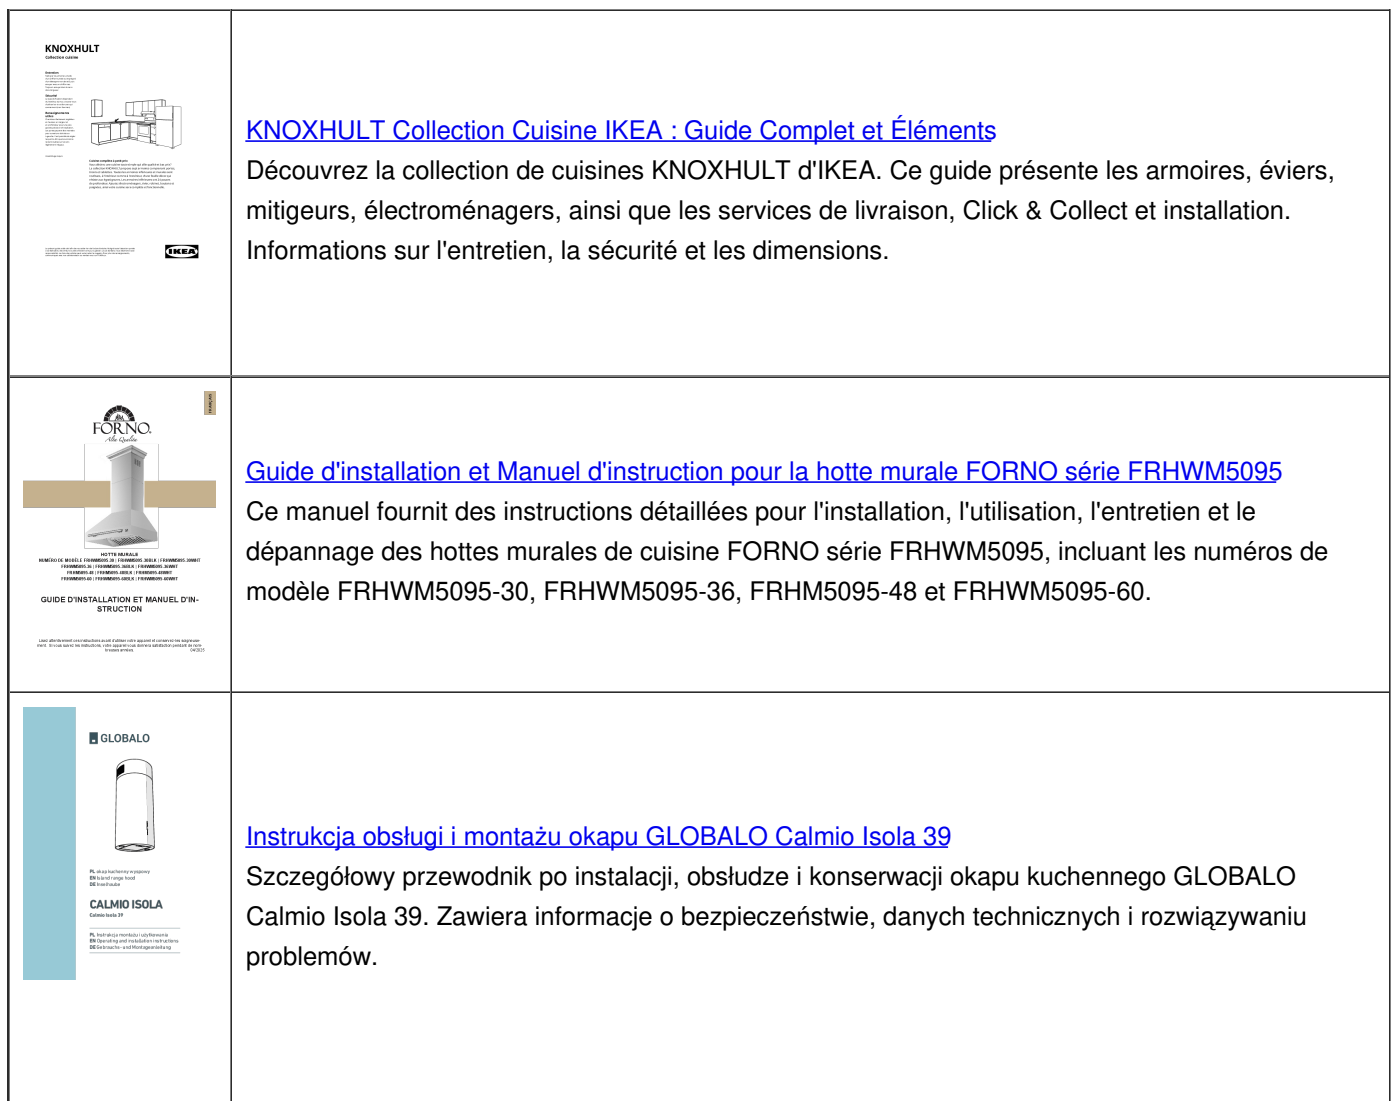

lang:de score:29 filesize: 184.79 K page_count: 1 document date: 2019-07-24

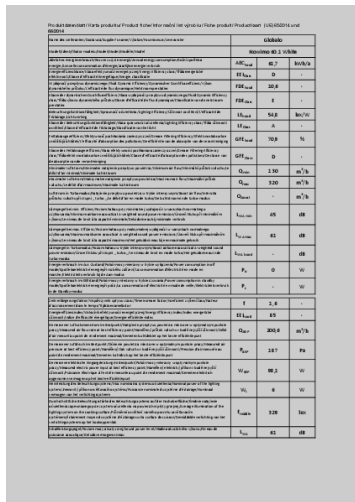

lang:pl score:26 filesize: 6.58 M page_count: 48 document date: 2020-09-24

lang:de score:26 filesize: 169.25 K page_count: 1 document date: 2019-07-24