



Instruction Manual

KB01105 Keyboard

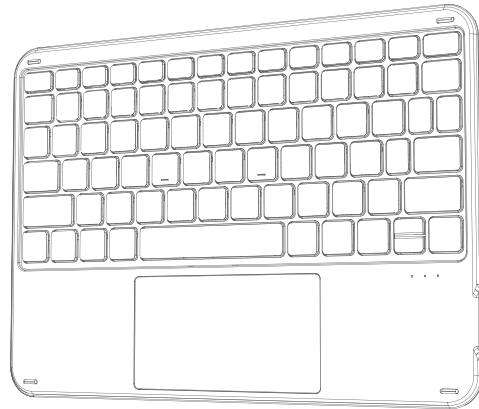

English

·Product Diagram

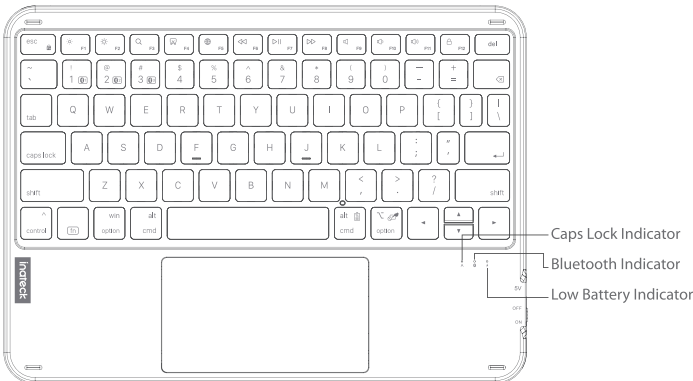

Power Switch Charging Port

1. Bluetooth Pairing

Step 1: For the first use, slide the power switch to the On position and then KB01105 will automatically enter Bluetooth Channel 1 pairing mode. To enter the Bluetooth pairing mode, you can also hold **fn** + **i** simultaneously.

Step 2: On your iPad or Windows devices, turn on Bluetooth and then "Inateck KB01105" will show up in available devices list.

On Windows 11, go to Settings—Bluetooth and Other Devices—Turn on the Bluetooth—Add Devices—Bluetooth to find "Inateck KB01105" on the list.

On iPad OS 18, go to Settings—Bluetooth—Turn on Bluetooth to find "Inateck KB01105" on the list.

Step 3: Tap "Inateck KB01105" to pair it with your device and then the Bluetooth indicator will stay on in Blue, which means that Bluetooth pairing is completed.

·Fix Bluetooth Pairing Problems

Step 1: Go to Bluetooth page, find "Inateck KB01105" in paired devices list and delete the previous pairing record. If there are multiple pairing records, please delete them all.

Step 2: Hold **ESC** + **+** simultaneously for 3 seconds and then the three indicators will blink 3 times once the factory reset is completed.

Step 3: Turn off Bluetooth on your device and turn it back on. Then, pair it with your Inateck KB01105.

2.Shortcut Keys

ESC	Undo	F1	Brightness-	F2	Brightness+
Q	Search	W	Take a screenshot	P	Switch keyboard layout
←	Last Track	→	Play/Pause	→	Next Track
M	Mute	P	Volume-	F11	Volume+
P	Lock	del	Delete		

Note: The following operations are only applicable to Windows.

How to Use F1-F12

You may press **fn** + **ESC** to enable/disable the Fn key lock. (The keyboard disables the Fn key lock by default.)

When the Fn Lock is enabled

Press F1 can trigger the functionality owned by F1 key;

Press the combination of **fn** + **F1** simultaneously will dim the brightness of the screen.

This method applies to all F Keys (F1-F12).

When the Fn Lock is disabled (Default Status)

Press F1 can dim the brightness of the screen.

Press the combination of **fn** + **F1** simultaneously will trigger the functionality owned by F1 key.

The Combination of Fn and Other Keys

fn + ESC	Enable/Disable Fn Lock
fn + alt cmd	Check the Battery Level
fn + option	Turn on/off Trackpad
fn + i	Short press to enter i pairing mode Long press to enter i pairing mode
fn + 2	Short press to enter 2 pairing mode Long press to enter 2 pairing mode
fn + 3	Short press to enter 3 pairing mode Long press to enter 3 pairing mode

3.LED Indicator

Indicator	Status	Meaning
Caps Lock Indicator	Solid	Caps Lock On
	Off	Caps Lock Off
Bluetooth Indicator	Fast Blinking	Bluetooth Pairing
	Off	Bluetooth Unconnected
	Solid	Bluetooth Connected
	Slow Blinking	Bluetooth Reconnecting
Battery Indicator	Flash in Red	Battery level<20%
	Solid in Red	Charging
	Solid in Green	Fully charged

Bluetooth Channel	Color
Bluetooth Channel 1	Blue
Bluetooth Channel 2	Orange
Bluetooth Channel 3	Green

4.Restore Factory Defaults

Hold **ESC** + **+** for 3 seconds and then the five indicators will blink 3 times once the factory reset is completed.

5.Check Battery Level

Hold **fn** + **alt cmd** simultaneously to check the battery level according to the blinking frequency of the red battery indicator.

Blinkina Frequency	Battery Level
Once	0~25%
Twice	25%-50%
Three Times	50%-75%
Four Times	75%-100%

6.Charging

When the battery level is under 20%, the red battery indicator will blink. Please use the USB-C cable to charge the keyboard. The keyboard would be fully charged in 2~3 hours. The battery indicator will stay solid in red when the keyboard is charging. Once it's fully charged, the battery indicator will turn green.
·Note: This product does not come with a charging cable. Please use your own USB-C cable for charging.

7.Sleep Mode

When KB01105 is left idle for 30 minutes, it will enter sleep mode and the Bluetooth connection will be disrupted. The connection can be rebuilt with a press of any key.

8.Product Specification

Bluetooth Version	Bluetooth 5.3
Bluetooth Range	10 m
Charging Time	2~3 h
Continuous Working Time	About 50 h
Operating Temperature	0°C ~ +35°C
Bluetooth Frequency Range	2402-2480MHZ
Actuation Force	60±10g
Battery Capacity	500mAh


9.Packing List

KB01105 *1

Instruction Manual *1

Deutsch

•Produkt Diagramm

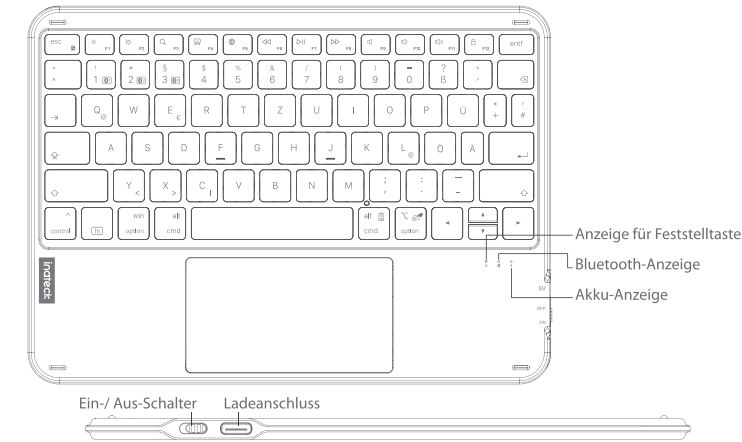

1. Bluetooth-Kopplung

Schritt 1: Für die erste Verwendung schieben Sie den ON-/OFF-Schalter in die Position "ON" und KB01105 wechselt automatisch in den Bluetooth-Kanal 1 Kopplungs-Modus. Um in den Bluetooth-Kopplungs-Modus zu gelangen, können Sie auch **fn** + **[1/2]** gedrückt halten.

Schritt 2: Schalten Sie Bluetooth auf Ihrem iPad oder Windows-Gerät ein und dann wird "Inateck KB01105" in der Liste der verfügbaren Geräte angezeigt.

Unter Windows 11 gehen Sie zu Einstellungen - Bluetooth und andere Geräte - Bluetooth einschalten - Geräte hinzufügen - Bluetooth, um „Inateck KB01105“ in der Liste zu finden.

Unter iPad OS 18 gehen Sie zu Einstellungen - Bluetooth - Die Bluetooth-Funktion einschalten, um „Inateck KB01105“ in der Liste zu finden

Schritt 3: Tippen Sie auf "Inateck KB01105", um sie mit Ihrem Gerät zu verbinden. Die Bluetooth-Anzeige leuchtet dann dauerhaft blau, was bedeutet, dass die Bluetooth-Kopplung abgeschlossen ist.

•Behebung von Bluetooth-Pairing-Problemen

Schritt 1: Gehen Sie zur Bluetooth-Seite, suchen Sie "Inateck KB01105" in der Liste der gekoppelten Geräte und löschen Sie den vorherigen Kopplungsverlauf. Wenn es mehrere Kopplungseinträge gibt, löschen Sie diese bitte alle.

Schritt 2: Halten Sie **[ESC]** + **[]** gleichzeitig für 3 Sekunden gedrückt. Die drei Anzeigen blinken 3 Mal, sobald das Zurücksetzen auf Werkseinstellungen abgeschlossen ist.

Schritt 3: Schalten Sie Bluetooth auf Ihrem Gerät aus und dann wieder ein. Koppeln Sie es dann mit Ihrer Inateck KB01105.

2.Tastenkürzel

[ESC]	Rückgängig machen	[F1]	Helligkeit-	[F2]	Helligkeit+
[F3]	Suche	[F4]	Screenshot machen	[F5]	Tastatur-Layout wechseln
[F6]	Letzter Titel	[F7]	Wiedergabe/Pause	[F8]	Nächster Titel
[F9]	Stumm	[F10]	Lautstärke-	[F11]	Lautstärke+
[F12]	Sperren	[entf]	Löschen		

Hinweis: Die folgenden Anweisungen gelten nur für Windows.

Wie nutzt man F1-F12

Sie können **fn** + **[ESC]** drücken, um die Fn-Tastensperre zu aktivieren/ deaktivieren. (Die Tastatur deaktiviert standardmäßig die Fn-Tastensperre.)

Wenn die Fn-Sperre aktiviert ist

Drücken Sie F1, um die Funktion auszulösen, die der F1-Taste zugeordnet ist.

Drücken Sie gleichzeitig die Kombination von **fn** + **[F1]**, um die Bildschirmhelligkeit zu verringern.Diese Methode gilt für alle F-Tasten (F1-F12).

Wenn die Fn-Sperre deaktiviert ist (Standardstatus)

Drücken Sie F1, um die Bildschirmhelligkeit zu verringern.

Drücken Sie gleichzeitig die Kombination von **fn** + **[F1]**, um die Funktion auszulösen, die der F1-Taste zugeordnet ist.

Die Kombination von Fn und anderen Tasten

fn + [ESC]	Aktivieren/ Deaktivieren Fn-Sperre
fn + [alt cmd]	Prüfen des Akkustandes
fn + [option]	Trackpad ein-/ ausschalten
fn + [1/2]	Kurz drücken, um [1/2] zu aktivieren
	Lang drücken, um den [1/2] -Kopplungsmodus aufzurufen
fn + [2/3]	Kurz drücken, um [2/3] zu aktivieren
	Lang drücken, um den [2/3] -Kopplungsmodus aufzurufen
fn + [3/4]	Kurz drücken, um [3/4] zu aktivieren
	Lang drücken, um den [3/4] -Kopplungsmodus aufzurufen

3.LED-Anzeige

Anzeige	Status	Bedeutung
Anzeige Feststelltaste	Dauerhaft an	Feststelltaste Ein
	Aus	Feststelltaste Aus
Bluetooth Anzeige	Schnell blinkend	Bluetooth-Kopplung
	Aus	Bluetooth - nicht verbunden
	Dauerhaft an	Bluetooth - verbunden
	Langsam Blinkend	Bluetooth -Wiederherstellung der Verbindung
Akku Anzeige	Blinkend in Rot	Akku-Stand<20%
	Dauerhaft an in Rot	Aufladen
	Dauerhaft an in Grün	Voll aufgeladen

Bluetooth-Kanal	Farbe
Bluetooth-Kanal 1	Blau
Bluetooth-Kanal 2	Orange
Bluetooth-Kanal 3	Grün

4.Werkseinstellungen wiederherstellen

Halten Sie **[ESC]** + **[]** gleichzeitig für 3 Sekunden gedrückt. Die fünf Anzeigen blinken 3 Mal, sobald das Zurücksetzen auf Werkseinstellungen abgeschlossen ist.

5.Akku-Stand prüfen

Halten Sie **fn** + **[alt cmd]** gleichzeitig gedrückt, um den um den Akku-Stand anhand der Blinkfrequenzen der roten LED-Anzeige zu überprüfen.

Blinkfrequenz	Akku-Stand
Einmal	0-25%
Zweimal	25%-50%
Dreimal	50%-75%
Viermal	75%-100%

6. Aufladen

Wenn der Batteriestand unter 20 % fällt, blinkt der rote Batterieanzeiger. Bitte verwenden Sie das USB-C-Kabel, um die Tastatur aufzuladen. Die Tastatur ist in 2 bis 3 Stunden vollständig aufgeladen. Der Batterieanzeiger leuchtet während des Aufladens ständig rot. Sobald die Tastatur vollständig aufgeladen ist, wird der Batterieanzeiger grün.

Hinweis: Dieses Produkt beinhaltet kein Ladekabel. Bitte verwenden Sie Ihr eigenes USB-C-Kabel zum Aufladen.

7. Ruhemodus

Wenn die KB01105 für 30 Minuten lang nicht benutzt wird, geht sie in den Ruhezustand über und die Bluetooth-Verbindung wird unterbrochen. Die Verbindung kann mit einem beliebigen Tastendruck wiederhergestellt werden.

8.Produktspezifikation

Bluetooth Version	Bluetooth 5.3
Bluetooth Reichweite	10 m
Ladedauer	2~3 Std.
Kontinuierliche Arbeitszeit	Ca. 50 Std.
Arbeitstemperatur	0°C ~ +35°C
Bluetooth Frequenzbereich	2402-2480MHZ
Antriebskraft	60±10g
Akku-Kapazität	500mAh

9.Verpackungsinhalt

KB01105 *1

Bedienungsanleitung *1

FCC Note

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the Users, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

—Reorient or relocate the receiving antenna.

—Increase the separation between the equipment and receiver.

—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. —Consult the dealer or an experienced radio/TV technician for help.

Note: The Grantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. such modifications could void the user's authority to operate the equipment.

The device has been evaluated to meet general RF exposure requirement.

This equipment complies with FCC's RF radiation exposure limits set forth for an uncontrolled environment. This device and its antenna(s) must not be co-located or conjunction with any other antenna or transmitter.

EU Declaration of Conformity

Inateck Co., Ltd. hereby declares that this device complies with the Directive 2014/53/EU .

A copy of the Declaration of Conformity can be accessed from <https://www.inateck.de/pages/inateck-euro-compliance>.



⚠ Battery Safety Warning:

This product contains a built-in rechargeable lithium battery. Please observe the following safety precautions: do not dismantle, hit, crush, or expose the battery to fire. If the battery experiences severe swelling, discontinue use immediately. Avoid placing the battery in high-temperature environments, and do not use it if it has been immersed in water. During transportation, do not mix the battery with metallic objects.

⚠ Batteriesicherheitshinweis:

Dieses Produkt enthält einen eingebauten wiederaufladbaren Lithium-Akku. Bitte beachten Sie die folgenden Sicherheitsvorkehrungen: Zerlegen Sie den Akku nicht, schlagen Sie ihn nicht, zerquetschen Sie ihn nicht und setzen Sie ihn nicht Feuer aus. Bei starkem Aufblähen des Akkus verwenden Sie ihn bitte sofort nicht mehr. Vermeiden Sie es, den Akku in heißen Umgebungen zu platzieren, und verwenden Sie ihn nicht, wenn er in Wasser getaucht wurde. Mischen Sie den Akku während des Transports nicht mit metallischen Gegenständen.

Service Center

Europe

F&M Technology GmbH
Tel: +49 341 5199 8410 (Working day 8 AM - 4 PM CET)
Fax: +49 341 5199 8413
Address: Fraunhoferstraße 7, 04178 Leipzig, Deutschland

North America

Inateck Technology Inc.
Tel: +1 (909) 698 7018 (Working day 9 AM - 5 PM PST)
Address: 2078 Francis St., Unit 14-02, Ontario, CA 91761, USA

日本

Inateck 株式会社
電話番号: +81 06 7500 3304
〒 547-0014 大阪府大阪市平野区長吉川辺 3 丁目 10 番 11 号

F&M Technology GmbH

Fraunhoferstraße 7, 04178 Leipzig, Deutschland
Tel: +49 341 5199 8410
Email: service@inateck.com
Postal code: 04178

Inateck Technology (UK) Ltd.

95 High Street, Office B, Great Missenden, United Kingdom, HP16 0AL
Tel: +44 20 3239 9869

Manufacturer

Shenzhen Inateck Technology Co., Ltd.
Address: Suite 2507, Block 11 in Tian An Cloud Park, Bantian Street, Longgang District, Shenzhen, Guangdong, China
Email: product@licheng-tech.com
Postal code: 518129

说明书尺寸：折后 120*180mm

材质：100g 双胶纸

此页不做印刷