


01 Introduction

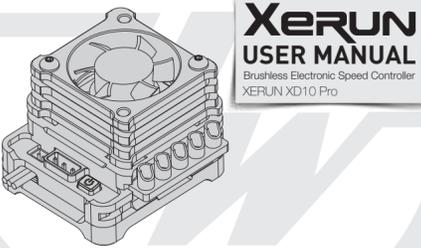

Congratulations and thank you for your trust in Hobbywing product. By purchasing the XERUN XD10 Pro, you have chosen a high performance sensorless brushless electronic speed controller! This speed controller is equipped with high-tech features to enhance your experience with Hobbywing brushless power systems. Improper usage and unauthorized modification to our product is extremely dangerous and may damage the product and related devices. Please take your time and read the following instructions carefully before you start using your speed controller. We have the right to modify our product design, appearance, features and usage requirements without notification. We, HOBBYWING, are only responsible for our product cost and nothing else as result of using our product.

02 Warnings

- To avoid short circuits, ensure that all wires and connections must be well insulated before connecting the ESC to related devices.
- Ensure all devices are well connected to prevent poor connections and avoid damage to your electronic devices.
- Read through the manuals of all power devices and chassis and ensure the power configuration is rational before using this unit.
- Please use a soldering iron with the power of at least 60W to solder all input/output wires and connectors.
- Do not hold the vehicle in the air and rev it up to full throttle, as rubber tires can "expand" to extreme size or even crack to cause serious injury.
- Stop immediate usage once the casing of the ESC exceeds 90°C/194°F, as this may cause damage to both the ESC and motor. Hobbywing recommends setting the "ESC Thermal Protection" to 105°C/221°F (this refers to the internal temperature of the ESC).
- Users must always disconnect the batteries after use as the current on the ESC is consuming continuously if it is connected to the batteries (even if the ESC is turned off). The battery will completely be discharged and may result in damage to the battery or ESC when it is connected for a long period of time. This WILL NOT be covered under warranty.


03 Features

- Built-in switch mode BEC with a maximum output of 10A and voltage adjustable from 5V to 7.4V (step: 0.1V) for usage with servos & other devices require different voltages.
- Separate PRG/FAN port is able to power an external fan for maximize cooling performance or connect a LCD program box or WiFi module to the ESC.
- Variable frequency regulation of PWM & brake frequencies allows users to precisely regulate the driving & braking forces (of the motor).
- Multiple protections: low-voltage cutoff protection, ESC and motor thermal protection, and fail safe (throttle signal loss protection), reverse polarity protection (the external standard cappack will still be damaged if battery reversal occurs).
- Data logging for recording the maximum ESC/motor temperature, motor speed/RPM, and others in real time.
- Firmware upgrade via Hobbywing multifunction LCD program box or OTA Programmer (item sold separately).

04 Specifications

Model	XERUN XD10 Pro
Cont./Peak Current	100A/800A
Motor Type	Sensored / Sensorless Brushless Motors
Applications	1/10 th drift car
Motor Limit*	Brushless Motor Limit with 25 LiPo/6S NiMH: 8.5T
LiPo/NiMH Cells	25 LiPo/4-6S NiMH
BEC Output	5-7.4V Adjustable, Continuous Current of 5A (Switch-mode)
Cooling Fan	Powered by the stable BEC voltage of 5-7.4V
Connectors	Input End: No Connectors; Output End: 3.5mm male plug
Size	40.7x35.0x32.0mm (w/Fan)
Weight	95g (w/ wires)
Programming Port	PRG/FAN Port

05 Connections

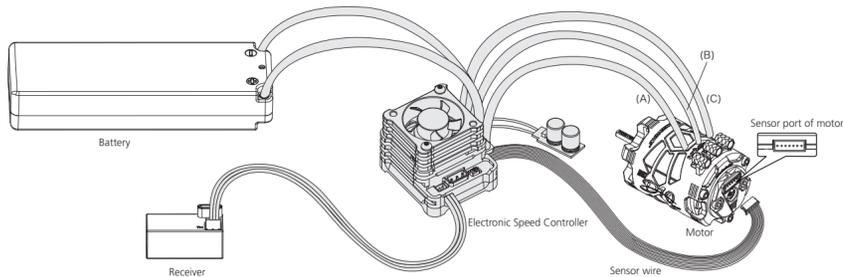

This is an extremely powerful brushless motor system. For your safety and the safety of those around you, we strongly recommend removing the pinion gear attached to the motor before performing calibration and programming functions with this system. It is also advisable to keep the wheels in the air when you turn on the ESC.

- Motor Wiring:** The motor wiring is different between the sensed and the sensorless; please only follow the introductions below.
 - Sensored Motor Wiring: There is strict wiring order from the ESC to the motor, the three A/B/C ESC wires must connect to the three A/B/C motor wires correspondingly. Next, connect the ESC sensor port and the motor sensor port with the stock 6-pin sensor cable. If you don't plug the sensor cable in, your ESC will still work in sensorless mode even if you're using a sensed motor.
 - Sensorless Motor Wiring: Users do not need to be worried in regards to the connectivity with the A/B/C(ESC and motor) as there is no polarity. You may find it necessary to swap two wires if the motor runs in reverse.
- Receiver Wiring:** The throttle control cable on the ESC has to be plugged into the throttle (TH) channel on the receiver. The throttle control cable has an output voltage of 6V/7.4V to the receiver and steering servo, hence, no separate battery can be connected to the receiver. Otherwise, your ESC may be damaged.
- Battery Wiring:** Proper polarity is essential. Please ensure positive (+) connects to positive (+), and negative (-) connects to negative (-) when plugging in the battery! When reverse polarity is applied to the ESC from the battery, the external standard cappack will still be damaged.

06 ESC Setup

1 ESC/Radio Calibration

Begin using your ESC by calibrating with your transmitter. We strongly recommend Hobbywing users to use the "Fail Safe" function on the radio system and set (F5) to "Output Off" or "Neutral Position". Example of calibrating Neutral range and Endpoint.

- Turn on the transmitter, ensure all parameters (D/R, Curve, ATL) on the throttle channel are at default (100%). For transmitter without LCD, please turn the knob to the maximum, and the throttle "TRIM" to 0. Please also turn the corresponding knob to the neutral position.
- Start by turning on the transmitter with the ESC turned off but connected to a battery. Holding the "ON/OFF" button, the RED LED on the ESC starts to flash (Note 2: the motor beeps at the same time), and then release the ON/OFF button immediately. **Note:** Beeps from the motor may be low sometimes, and you can check the LED status instead.
- Set the neutral point, the full throttle endpoint and the full brake endpoint.
 - Leave transmitter at the neutral position, press the "ON/OFF" button, the RED LED dies out and the GREEN LED flashes 1 time and the motor beeps 1 time to accept the neutral position.
 - Pull the throttle trigger to the full throttle position, press the "ON/OFF" button, the GREEN LED blinks 2 times and the motor beeps 2 times to accept the full throttle endpoint.
 - Push the throttle trigger to the full brake position, press the "ON/OFF" button, the GREEN LED blinks 3 times and the motor beeps 3 times to accept the full brake endpoint.
- The end position of forward: Pull the trigger to the maximum throttle position if it is pistol-style transmitter. Push the throttle to the top if it is board-style transmitter.
- The end position of backward: Push the trigger to the maximum brake position if it is pistol-style transmitter. Pull the throttle to the bottom if it is board-style transmitter.
- The motor can be started 3 seconds after the ESC/Radio calibration is complete.

2 Power On/Off

Attention! The temperature of its Aluminum housing may be very high when there is heavy load. For precaution, we recommend users to have a fan blown towards the ESC. (Start with the ESC turned ON/OFF button to turn on the ESC (the indication LED comes on), and press the ON/OFF button again to turn off the ESC (the indication LED dies out). **Note:** Do not turn off the ESC when the motor is spinning. The sudden stoppage may result in unwanted damage to both the motor and ESC. If there is an emergency, battery plugs can be pulled out to switch the ESC off.

3 Programmable Items

Section	Item	Programmable Items	Parameter Values															
General Setting	1A	Running Mode	Forward with Brake	Forward/ Reverse with Brake	Forward and Reverse													
	1B	Max. Reverse Force	25%	50%	75%	100%												
	1C	Reverse Delay		0-55 (Adjust Step 0.5S)														
	1D	Cutoff Voltage	Disabled	Auto (3.3V/Cell)			3.0-7.4V Adjustable (Step: 0.1V)											
	1E	ESC Thermal Protection	Disabled	105°C/221°F	125°C/257°F													
	1F	Thermal Protection	Disabled	105°C/221°F	125°C/257°F													
	1G	BEC Voltage					5V-7.4V Adjustable (Step:0.1V)											
	1H	Remote Off	Disabled	Enabled														
	1I	Motor Rotation	CCW	CW														
	1J	Phase-AC Swap	Disabled	Enabled														
Throttle Control	2A	Throttle Rate Control					1-30 Adjustable (Step: 1)											
	2B	Throttle Curve	Linear	Customized														
	2C	Neutral Range					3%-10% (Adjust Step1%)											
	2D	Initial Throttle Force					1-15 (Adjust Step 1)											
	2E	Coast					0-15 (Adjust Step 1)											
	2F	PWM Drive Frequency	1K	2K	4K	8K	12K	16K	24K	32K	40K	48K	Customized					
	2G	Softening Value									0-30° Adjustable (Step: 1°)							
	2H	Softening Range	0%	10%	20%	25%	30%	35%	40%	45%	50%	55%	60%	65%	70%	75%		
	3A	Drag Brake Force									0%-100% Adjustable (Step: 1%)							
	Brake Control	3B	Max. Brake Force								0%-100% (Adjust Step 1%)							
3C		Initial Brake Force	=Drag brake							0%-50% Adjustable (Step:1%)								
3D		Brake Rate Control								1-20 Adjustable (Step: 1)								
3E		Brake Curve	Linear	Customized														
3F		Brake Frequency	0.5K	1K	2K	4K	8K	12K	16K	20K	24K	Customized						
4A		Boost Timing									0-64° Adjustable (Step: 1°)							
4B		Boost Timing Activation	RPM	Auto														
4C		Boost Start RPM									500-3500RPM (Step: 500RPM)							
4D		Boost End RPM									3000-6000RPM (Step: 500RPM)							
Timing		5A	Turbo Timing								0-64° Adjustable (Step: 1°)							
	5B	Turbo Delay	Instant	0.05s	0.1s	0.15s	0.2s	0.25s	0.3s	0.35s	0.4s	0.45s	0.5s	0.6s	0.7s	0.8s	0.9s	1.0s
	5C	Turbo Increase Rate (deg/0.1sec)	Instant	3deg/0.1s	6deg/0.1s	9deg/0.1s	12deg/0.1s	15deg/0.1s	18deg/0.1s	21deg/0.1s	24deg/0.1s	27deg/0.1s	30deg/0.1s					
	5D	Turbo Decrease Rate (deg/0.1sec)	Instant	3deg/0.1s	6deg/0.1s	9deg/0.1s	12deg/0.1s	15deg/0.1s	18deg/0.1s	21deg/0.1s	24deg/0.1s	27deg/0.1s	30deg/0.1s					

Note: Item 4C (Boost Start RPM) & item 4D (Boost End RPM) are not programmable if item 4B (Timing Activation) is set to "Auto".

- Running Mode**
 - Option 1: Forward with Brake**
Racing mode. It has only forward and brake functions.
 - Option 2: Forward/ Reverse with Brake**
This option is known to be the "training" mode with "Forward/ Reverse with Brake" functions. Hobbywing has adopted the "DOUBLE-CLICK" method, that is your vehicle only brakes on the 1st time you push the throttle trigger forward (brake) (1st push). The motor stops when you quickly release the throttle trigger and then re-push the trigger quickly (2nd push), only then the vehicle will reverse. The reverse function will not work if your car does not come to a complete stop. The vehicle only reverses after the motor stops. This method is for preventing vehicle from being accidentally reversed.
 - Option 3: Forward and Reverse**
This mode is often used by special vehicles (rock crawler). It adopts the "SINGLE-CLICK" method. The vehicle will reverse immediately when you push the throttle trigger forward (brake).
- Max. Reverse Force**
The reverse force of the value will determine its speed. For the safety of your vehicle, we recommend using a low amount.
- Reverse Delay**
This parameter is used to adjust and set the delay time when the reverse output is being applied; When the motor is at a standstill, the reverse output will be activated once the delay time of the value is reached.
- Cutoff Voltage**
Sets the voltage at which the ESC lowers or removes power to the motor in order to either keep the battery at a safe minimum voltage (for LiPo batteries). The ESC monitors the battery voltage all the time, it will immediately reduce the power to 50% (in 3 seconds) and cut off the output 40 seconds later when the voltage goes below the cutoff threshold. The RED LED will flash a short, single flash that repeats (⚡, ⚡, ⚡) to indicate the low-voltage cutoff protection is activated. Please set the "Cutoff Voltage" to "Disabled" or customize this item if you are using NiMH batteries.
 - Option 1: Disabled**
The ESC does not cut the power off due to low voltage. We do not recommend using this option when you use any LiPo battery as you will irreversibly damage the product. You need to select this option when you are using a NiMH pack.
 - Option 2: Auto**
The ESC calculates the corresponding cutoff voltage for the battery shall be 6.6V.
 - Option 3: Customized**
The customized cutoff threshold is a voltage for the whole battery pack (adjustable from 3.0V to 7.4V).
- ESC Thermal Protection**
The output from the ESC will be cut off with the value you have preset.
The GREEN LED flashes (⚡, ⚡, ⚡) when the ESC temperature reaches to the preset value. The output will not resume until the ESC temperature gets down.
Warning! Please do not disable this function unless you're in a competition. Otherwise the high temperature may damage your ESC and even your motor.
- Motor Thermal Protection**
The GREEN LED flashes (⚡, ⚡, ⚡) when the motor temperature reaches to the preset value. The output will not resume until the motor temperature gets down.
Warning! Please do not disable this function unless you're in a competition. Otherwise the high temperature may damage your motor and even your ESC. For non-Hobbywing motor, the ESC may get this protection activated too early/late because of the different temperature sensor inside the motor. In this case, please disable this function and monitor the motor temperature manually.
- BEC Voltage**
BEC voltage can be adjusted between 6.0-7.4V. 6.0V is applicable to common servo. If use high-voltage servo, set to higher voltage according to voltage marking of servo.
- Remote Off**
 - Option 1: Enabled**
Users can simply push and hold the brake trigger for 6 seconds. This option allows the user to turn off the ESC without pushing the ON/OFF button switch.
 - Option 2: Disabled**
Users must turn off the ESC by pressing the ON/OFF switch button on the ESC.
- Motor Rotation/Direction**
With the motor shaft faces you (the rear end of the motor is away from you), increase the throttle input, the motor (shaft) will rotate in the CCW/CW direction if the "Motor Rotation /Direction" set to "CCW/CW". Generally, the vehicle runs forward when the motor (shaft) rotates in the CCW direction. However, some vehicles only run forward when the motor rotates in the CW direction due to the different chassis design. In that case, you only need to set the "Motor Rotation/Direction" to "CW".
 - Phase-AC Swap**
If the A/C wire of ESC connect to A/C wire of motor with crossed way (A wire of ESC connects to C wire of motor, C wire of ESC connects to A wire), set this item as Enable.
- Throttle Rate Control**
This item is used to control the throttle response. It can be adjustable from 1 to 30 (step: 1), the lower the throttle rate, the more the limit will be on the throttle response. A suitable rate can help driver to control his vehicle properly during the starting-up process. Generally, you can set it to a high value to have a quick throttle response if you are proficient at throttle control.
 - Throttle Curve**
The throttle curve parameter reconciles the position of the throttle trigger (in throttle zone) and the actual ESC throttle output. It is linear by default and we can change it to non-linear via adjusting the throttle curve parameter. For example, if adjust it to +EXP, the throttle output at the early stage will be higher (than the output when the curve is linear); if it is adjusted to -EXP, the throttle output at the early stage will be lower (than the output when the curve is linear).
- Neutral Range**
As not all transmitters have the same stability at "neutral position", please adjust this parameter as per your preference. You can adjust to a bigger value when this happens.
- Initial Throttle Force**
It is also called as minimum throttle force. You can set it according to wheel tire and traction. If the ground is slippery, please set a small throttle force. Some motors have strong cogging effect with lower FDR number. When you push throttle a little bit, the motor will not rotate until a higher throttle point than the default initial throttle point. When we have this parameter, we can use the transmitter trim to check the above issue and then adjust the best initial throttle point by increasing the IIF a little. The control feeling will be smoother if you find the best point. Normally the number will be over 5%.
- Coast**
The RPM of the motor will be lowered gradually when throttle is reduced. The vehicle will not reduce speed abruptly when the throttle is reduced to return to the neutral position. The bigger the value, the more the "COAST" will be felt. Example, COAST of 0 deactivates, and a COAST of 20% would be the maximum amount of COAST.
What is COAST?
When a vehicle has a larger final drive ratio, the tendency of having a "drag" feel is higher. The "COAST" technology is to allow the car to roll (coast) even when the final drive ratio is high. The Coast function brings better and smoother control feeling to racers. Some drivers will refer to this to the traditional brushed motors.
Note: The "Coast" will be void (even if you set it to any value besides 0) if the above "drag brake" is not "0%".
- PWM Drive Frequency**
The acceleration will be more aggressive at the initial stage when the drive frequency is low; a higher drive frequency is smoother but this will create more heat to the ESC. If set this item to "Customized", then the PWM frequency can be adjusted to a variable value (which ranges from 0K to 32K) at any 0-100% throttle input. Please choose the frequencies as per the actual test results of your vehicles.
- Softening Value**
It allows users to fine-tune the bottom end, change the driving feel, and maximize the driving efficiency at different track conditions. The higher the "Softening Value", the milder the bottom end. In Modified class, drivers often feel the power of the bottom end is too aggressive. Little throttle input usually brings too much power to the car and make it hard to control at the corners, so HOBBYWING creates this softening function to solve the issue.
Note: You can increase the motor mechanical timing accordingly after you set the softening value. Every time you increase the softening value by 5 degrees, you can increase the mechanical timing by 1 degree. For example, if you set the softening value to 20 degrees, then you can increase the mechanical timing by 4 degrees. Please note that you will never increase the mechanical timing by over 5 degrees.
- Softening Range**
It's the range to which "Softening Value" starts and ends. For example, 0% to 30% will be generated when the user pre-programs the "Softening Range" at a value of 30%.
- Drag Brake**
It is the braking power produced when releasing from full speed to neutral position. This is to simulate the slight braking effect of a neutral brushed motor while coasting. It's not

- Attention!** Drag brake will consume more power and heat will be increased, apply it cautiously.
- Max. Brake Force**
This ESC provides proportional braking function; the braking effect is decided by the position of the throttle trigger. It sets the percentage of available braking power when full brake is applied. Large amount will shorten the braking time but it may damage your pinion and spur.
- Initial Brake Force**
It is also known as "minimum brake force". It is the force when pushing throttle trigger from neutral zone to the initial brake position. To get a smoother braking effect, the default is equal to the drag brake.
- Brake Rate Control**
It's adjustable from 1 to 20 (step: 1), the lower the brake rate, the more limit on the brake response. A suitable rate can aid the driver to brake his vehicle correctly. Generally, you can set it to a high value to have a quick brake response.
- Brake Curve**
This item is used for regulating the relation between the throttle range in brake zone and the brake force. The default setting is linear. You can change it to non-linear via a LCD program box and a PC (HOBBYWING USB LINK software needs to be installed on the PC.) for different braking effect.
- Brake Frequency**
The brake force will be larger if the frequency is low; you will get a smoother brake force when the value is higher. If set this item to "Customized", then the brake frequency can be adjusted to a variable value (which ranges from 0K to 16K) at any 0-100% throttle input. Please choose the frequencies as per the actual test results of your vehicles.
- Boost Timing**
It is effective within the whole throttle range; it directly affects the car speed on straightaway and winding course. The ESC adjusts the timing dynamically as per the RPM (when "Boost Timing Activation" set to "RPM") or throttle amount (when "Boost Timing Activation" set to "Auto") in the operation. The Boost Timing is not constant but variable.
- Boost Timing Activation**
 - Option 1: RPM**
In RPM mode, the ESC adjusts the Boost Timing dynamically as per the motor speed (RPM). The actual Boost Timing is 0 when the RPM is lower than the Boost Start RPM. The Boost Timing changes as per the RPM when the RPM changes between the Boost Start RPM and the Boost End RPM. For example, if the Boost Timing is set to 5 degrees and the Boost Start RPM is 10000, the Boost End RPM is 15000. The Boost Timing corresponds to different RPM is shown below. When the RPM is higher than the Boost End RPM, the actual Boost Timing is the value you had previously set.

RPM (Motor Speed)	<10000	10001-11000	11001-12000	12001-13000	13001-14000	14001-15000	>15000
Actual Boost Timing	0 Degree	1 Degree	2 Degrees	3 Degrees	4 Degrees	5 Degrees	5 Degrees

- Option 2: Auto**
In Auto mode, the ESC adjusts the Boost Timing dynamically as per the throttle amount. Only at full throttle, the actual Boost Timing is the value you had previously set.
- Boost Start RPM**
This item defines the RPM at which Boost Timing is activated. For example, when the Boost Start RPM is set to 5000, the ESC will activate the corresponding Boost Timing when the RPM goes above 5000. The specific value is determined by the Boost Timing and the Boost End RPM you had previously set.
- Boost End RPM**
This item defines the RPM at which Boost Timing (you specifically set) is applied. For example, when Boost Timing is set to 10 degrees and the Boost End RPM to 15000, the ESC will activate the Boost Timing of 10 degrees when the RPM goes above 15000. The ESC will adjust the Boost Timing accordingly as per the actual RPM when the RPM goes below 15000.
- Turbo Timing**
This item is adjustable from 0 degree to 64 degrees, the corresponding turbo timing (you set) will initiate at full throttle. It's usually activated on long straightaway and makes the motor unleash its maximum potential.
- Turbo Delay**
When "TURBO DELAY" is set to "INSTANT", the Turbo Timing will be activated right after the throttle trigger is moved to the full throttle position. When other value(s) is applied, you will need to hold the throttle trigger at the full throttle position (as you set) till the Turbo Timing initiates.
- Turbo Increase Rate**
This item is used to define the "speed" at which Turbo Timing is released when the trigger condition is met. For example, "6 degs/0.1sec" refers to the Turbo Timing of 6 degrees that will be released in 0.1 second. Both the acceleration and heat is higher when the "Turbo increase rate" is a larger value.
- Turbo Decrease Rate**
After the Turbo Timing is activated and the trigger condition turns to not be met (i.e. vehicle slows down at the end of the straightaway and gets into a corner, full throttle turns to partial throttle, the trigger condition for Turbo Timing turns to be not met), if you disable all the Turbo Timing in a moment, an obvious slow-down like braking will be felt and cause the control of vehicle to become bad. If the ESC can disable the Turbo Timing at some "speed", the slow-down will be linear and the control will be improved. **Warning!** Boost Timing & Turbo Timing can effectively improve the motor efficiency; they are usually used in competitions. Please take some time to read this manual and then set these two items carefully, monitor the ESC & motor temperature when you have a trial run and then adjust the Timing and FDR accordingly as aggressive Timings and FDR may cause your ESC or motor to be burnt.

5 ESC Programming

- Program your ESC with a multifunction LCD program box**
You can program this XD10 Pro ESC via a multifunction LCD program box or via a multifunction LCD program box & a PC (HOBBYWING USB LINK software needs to be installed on the PC). Before programming, you need to connect your ESC and the LCD program box via a cable with two JR male connectors and turn on the ESC; the boot screen will show up on the LCD. Press any button on the program box to initiate the communication between your ESC and the program box. Second later, "CONNECTING ESC" will be displayed, and indicates the following parameters. You can adjust the setting via "ITEM" & "VALUE" buttons, and press the "OK" button to save new settings to your ESC.
- Program your ESC with a OTA Programmer**
The XD10 Pro ESC can also be programmed via a WiFi module along with smart phone devices (HOBBYWING WiFi LINK software needs to be installed on the smart phone). Before programming, users will need to plug the programming cable on the OTA Programmer into the programming port on ESC and switch on the ESC. For detailed information about ESC programming via OTA Programmer, please refer to the user manual of Hobbywing's OTA Programmer. **Attention!** This ESC has a separate programming port. Please don't use the throttle control cable (also called Rx cable) on the ESC to connect the program box; otherwise the program box won't function.
- Data Checking**
The ESC is able to record the maximum ESC temperature, maximum motor temperature, minimum battery voltage and maximum motor speed in operation. It automatically saves the recorded data to the designated area when you turn off the ESC after a run. You can check those data via a multifunction LCD program box whenever necessary. Users need to switch on the ESC after connection between the program box and the ESC has been established. Press the "RP" button on any "item" page followed by pressing the "RP" button again multiple times. The following 5 item pages will be displayed circularly: Mode → ESC Temperature → Motor Temperature → Min Voltage → Max RPM. **Attention!**
 - Press the "VALUE" button on any data-recording page can get you into the next preset mode. Please note that improper operation will get you into other preset modes!
 - Press the "ITEM" button on any data-recording page can get you to the parameter setting page of the current preset mode; press the "RP" button if you want to return to the data-recording page.

6 Factory Reset

- Restore the default values with a multifunction LCD program box**
After connecting the program box to the ESC, continue to press the "ITEM" button on the program box until you see the "RESTORE DEFAULT" item, and press "OK" to factory reset your ESC.
- Restore the default values with a OTA Programmer (& HW Link APP)**
After connecting the WiFi module to the ESC, open the HOBBYWING WiFi LINK software on your smart phone, select "Parameters" followed by "Factory Reset" to reset the ESC.

07 Explanation for LED Status

- During the Start-up Process**
 - The RED LED turns on solid indicating the ESC doesn't detect any throttle signal or the throttle trigger is at the neutral position.
 - The GREEN LED flashes rapidly indicating the neutral throttle value stored on your ESC may be different from the current value stored on the transmitter. When this happens, re-calibrate the throttle range.
- In Operation**
 - The RED LED turns on solid and the GREEN LED dies out when the throttle trigger is in the throttle neutral zone. The RED LED will blink slowly (to confirm with ROAR's Sportman (or Zero Timing) rules) if the total value of Boost Timing and Turbo timing is 0.
 - The RED LED dies out and the GREEN LED blinks when your vehicle runs forward. The GREEN LED turns solid when pulling the throttle trigger to the full (100%) throttle endpoint.
 - The RED LED dies out and the GREEN LED blinks when you brake your vehicle. The GREEN LED turns solid when pushing the throttle trigger to the full brake endpoint and setting the "maximum brake force" to 100%.
 - The RED LED dies out, the GREEN LED blinks when you reverse your vehicle. The GREEN LED turns solid when pushing the throttle trigger to the full brake endpoint and setting the "reverse force" to 100%.
- When Some Protection is Activated**
 - The RED LED flashes a short, single flash and repeats "⚡, ⚡, ⚡" indicating the low voltage cutoff protection is activated.
 - The GREEN LED flashes a short, single flash and repeats "⚡, ⚡, ⚡" indicating the ESC thermal protection is activated.
 - The GREEN LED flashes a short, double flash and repeats "⚡, ⚡, ⚡" indicating the motor thermal protection is activated.
 - The RED & GREEN LED flash a short, single flash and repeats "⚡, ⚡, ⚡" at the same time indicating the drive mode has been automatically switched to sensorless mode from sensed mode because of abnormal sensor signal when pairing the ESC with a sensorless motor.

08 Trouble Shooting

Trouble(s)	Possible Causes	Solution(s)
The ESC was unable to start the status LED, the motor, and the cooling fan after it was powered on.	1. No power was supplied to the ESC. 2. The ESC switch was damaged.	Check if all ESC & battery connectors have been well soldered or firmly connected.
The ESC was unable to start the motor, but the RED LED on the ESC turned on solid.	The throttle cable was reversely plugged into the TH channel or plugged into wrong channel on the receiver.	Plug the throttle cable into the throttle channel (CH2) by referring to relevant mark shown on your receiver.
The vehicle ran backward when you pulled the throttle trigger towards you.	1. The ESC-to-motor wiring order was incorrect. 2. Your chassis	