

Compustar 2WT13R-SF

Compustar 2WT13R-SF 2-Way Color LCD Remote User Manual

Model: 2WT13R-SF | Brand: Compustar

INTRODUCTION

This manual provides essential information for the proper use and maintenance of your Compustar 2WT13R-SF 2-Way Color LCD Remote. This remote is designed to provide advanced control and feedback for compatible Compustar vehicle security and remote start systems.

COMPATIBILITY

Important Compatibility Note:

- This remote ONLY works with the **Compustar PRO-T13 System**. It will NOT work with other systems.
- You MUST HAVE Compustar Antenna Model **ANT-2WSF** for this remote to function correctly.

Ensure your existing system meets these requirements before attempting to use this remote.

PRODUCT OVERVIEW

Key Features

- 2-Way Communication: Receive instant confirmation on the remote's LCD screen.
- Color LCD Display: Provides clear visual feedback on vehicle status.
- Up to 3 Mile Range: Extended operating range for convenience.
- Ergonomic Design: Comfortable to hold and use.
- Real-time Vehicle Status: Displays battery voltage and interior temperature (if supported by system).

Remote Components

The Compustar 2WT13R-SF remote features a vibrant color LCD screen and intuitive buttons for controlling your vehicle's functions.



Image: Front view of the Compustar 2WT13R-SF remote, displaying its color LCD screen with vehicle status icons and control buttons.



Image: Angled view of the Compustar 2WT13R-SF remote, showcasing its sleek design and button placement.

SETUP

This remote is a replacement or additional remote for an existing Compustar PRO-T13 system. It requires programming to your vehicle's system to function.

Important: This package DOES NOT INCLUDE programming instructions. You must use the instructions that came with your PRO-T13 system or consult a certified Compustar installer for programming.

Typically, programming involves a sequence of steps using the vehicle's ignition and the remote's buttons. Refer to your PRO-T13 system's installation or user manual for detailed programming procedures.

OPERATION

The 2WT13R-SF remote provides intuitive control over your vehicle's functions. The exact functions and button presses may vary slightly based on your PRO-T13 system's configuration.

Basic Functions:

- **Lock:** Press the **Lock** button (usually indicated by a closed padlock icon) once to lock your vehicle's doors. The remote will provide visual and audible confirmation.

- **Unlock:** Press the **Unlock** button (usually indicated by an open padlock icon) once to unlock your vehicle's doors. Confirmation will be displayed on the LCD.
- **Remote Start/Stop:** Press and hold the **Start/Stop** button (often a power icon) for approximately 2-3 seconds to remote start or stop your vehicle. The LCD will show engine status.
- **Trunk Release:** Press and hold the **Trunk** button (if available, usually an open trunk icon) for 2-3 seconds to pop the trunk.
- **Panic:** Press and hold the **Panic** button (if available, often a horn icon) for 2-3 seconds to activate the vehicle's alarm. Press again to disarm.

Refer to your PRO-T13 system manual for advanced features, custom button programming, and detailed LCD icon explanations.

MAINTENANCE

Battery Replacement:

The 2WT13R-SF remote uses a replaceable battery. When the battery icon on the LCD indicates low power, or the remote's range decreases significantly, it's time to replace the battery.

1. Locate the battery compartment on the back of the remote.
2. Carefully open the compartment using a small flat-head screwdriver or a coin.
3. Note the orientation of the old battery and remove it.
4. Insert a new battery (typically a CR2032 coin cell, but verify with your PRO-T13 manual or the remote's markings) with the positive (+) side facing up.
5. Close the battery compartment securely.

Care and Cleaning:

- Avoid exposing the remote to extreme temperatures, direct sunlight for prolonged periods, or excessive moisture.
- Clean the remote with a soft, dry cloth. Do not use harsh chemicals or abrasive cleaners.
- Protect the LCD screen from scratches. Consider purchasing a protective case.

TROUBLESHOOTING

Common Issues and Solutions:

- **Remote Not Responding:**
 - Check the remote's battery and replace if low.
 - Ensure you are within range of the vehicle and the ANT-2WSF antenna.
 - Verify the remote is properly programmed to your PRO-T13 system. If unsure, consult your system's manual or a professional installer.
- **Short Operating Range:**
 - Replace the remote's battery.
 - Ensure there are no major obstructions (buildings, hills) between the remote and the vehicle.
 - Check for sources of radio interference in the area.

- **LCD Display Issues:**

- If the display is dim or flickering, replace the battery.
- If the display is blank, ensure the remote is powered on (if applicable) and the battery is charged.

For persistent issues, contact Compustar customer support or a certified Compustar dealer.

SPECIFICATIONS


Feature	Detail
Model Number	2WT13R-SF
Brand	Compustar
Connectivity Technology	Infrared <i>(Note: While listed as Infrared, remote start systems typically use Radio Frequency for primary communication.)</i>
Compatible Devices	Compustar PRO-T13 System
Max Number of Supported Devices	1 (per remote)
Special Feature	Ergonomic
Item Weight	1.76 ounces
Package Dimensions	4.53 x 2.44 x 1.18 inches
Date First Available	March 24, 2021

WARRANTY AND SUPPORT

This Compustar product is covered by the manufacturer's warranty. For specific warranty terms and conditions, please refer to the documentation included with your original Compustar PRO-T13 system or visit the official Compustar website.

For technical support, troubleshooting assistance beyond this manual, or to locate a certified installer, please contact Compustar customer service or your authorized Compustar dealer.

© 2024 Compustar. All rights reserved. Information subject to change without notice.



[pdf] User Manual Guide Warranty

2WT13R SF Quick Card 122x100 200825 PRO T13 EN ES FR User Manuals Compustar Guide cdn firste ch compustar man |||
QUICK START CARD 8102REUCL002200 // 2WT13R Guide REV1.0 **2WT13R-SF**
QUICK START 4 seconds x 2 Hold this button for 4 seconds to power up the remote.
Tap this button 1 time to lock and/or arm your system. Double tap this button to activate AUX 2 output when Secure AUX mode is disabled. 5 sec Ho...
lang:en score:66 filesize: 2.3 M page_count: 6 document date: 2020-08-27



[pdf] User Manual Guide Warranty

Microsoft Word T13 R5 user master guide wbeebe Full Manual EN User Manuals Compustar 2WT13R 2WR5R cdn firste ch compustar man |||
By Firstech LLC, Version: 1.0 This device complies with Part 15 of the FCC rules.
Operation is subje ... this manual. Firstech remotes carry a 1 year warranty from original date of purchase. Compustar Pro **2WT13R-SF** remote carries a 3 year warranty. Warranty registration can be completed online by visitin...
lang:da score:51 filesize: 1.82 M page_count: 17 document date: 2021-11-15




[pdf] User Manual

Microsoft Word 2WT13R SF User Manual docx SUNGJIN manual SEGI LIMITED RCJ500 2WLR Keyless Entry System VA5RCJ500 VA5RCJ5002WLR rcj500 2wlr
User Manual By Firstech LLC, Version: 1.0 Applicable to the following remote s ;
2WT13R-SF 2Way 3Button LCD Remote Model Name **2WT13R-SF ANT-2WSF** FCC ID VA5RCJ500-2WLR VA5ANH500-2WLF WWW.COMPUSTAR.COM IC Number 7087A-2WRCJ500LR 7087A-2WANH500LF WARNING It is the responsibility of the vehicle ope...
lang:en score:46 filesize: 797.75 K page_count: 10 document date: 2020-06-30



[pdf] Guide Warranty

2WT13R SF Quick Card 122x100 200825 Compustar Rechargeable Battery Your is equipped with a rechargeable battery Use the included FT USB CHARGER to charge your remote We recommend Card122x100 EN www.pustar live 2020 10 |||
QUICK START CARD 8102REUCL002200 // 2WT13R Guide REV1.0 **2WT13R-SF**
QUICK START 4 seconds x 2 Hold this button for 4 seconds to power up the remote.
Tap this button 1 time to lock and/or arm your system. Double tap this button to activate AUX 2 output when Secure AUX mode is disabled. 5 sec Ho...
lang:en score:39 filesize: 1.39 M page_count: 2 document date: 2020-10-28

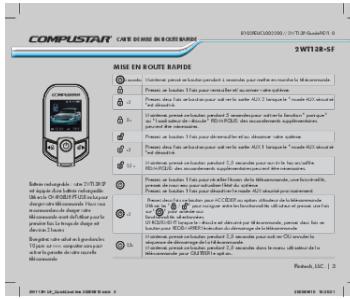


[\[pdf\]](#) Guide

2WT13R SF Quick Card 122x100 200825 Card122x100 FR www.pustar.live 2020 10 |||

CARTE DE MISE EN ROUTE RAPIDE 8102REUCL002200 // 2WT13R Guide
REV1.0 **2WT13R-SF** MISE EN ROUTE RAPIDE 4 secondes Maintenez press ce bouton pendant 4 secondes pour mettre en marche la tlcommande. Pressez ce bouton 1 fois pour verrouiller et/ou armer votre systme. x 2 Pressez deux fois ce bouton p...

lang:fr score:36 filesize: 1.4 M page_count: 2 document date: 2020-10-28

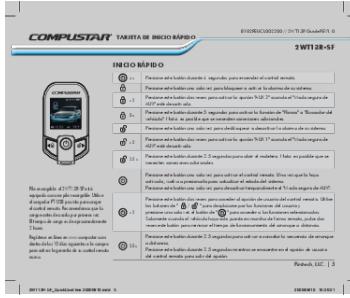

[\[pdf\] Guide](#)

2WT13R SF Quick Card 122x100 200825 Card122x100 SP www.pustar.live 2020 10 III

TARJETA DE INICIO RPIDO 8102REUCL002200 // 2WT13R Guide REV1.0

2WT13R-SF INICIO RPIDO 4 s Presione este botn durante 4 segundos para encender el control remoto. Presione este botn una sola vez para bloquear o activar la alarma de su sistema. x 2 Presione este botn dos veces para activar la opc...

lang:es score:36 filesize: 1.4 M page_count: 2 document date: 2020-10-28



[\[pdf\] Installation Guide Accessories Catalog](#)

Catalog Firsttech iDatastart 4173 TESA Soft PVC 19mm x 33mm Pack of 8 UHS Hardware firsttech 2022
fall catalog v 1666978590 cdn shopify s files 1 0052 5395 5651 |||

INNOVATION FIRST 2022 Company Catalog Powered by REMOTE START

SECURITY TELEMATICS IN-CAR CAMER ... ALARMIT HRN BLADE 1099.99

CSXP9913-AS CMX ALARMIT HRN 999.99 Remote Start Controller **2WT13R-SF X1**-LTE module for DroneMobile CSX 9900AS CSX9900-AS MSRP: 899.99 2-WAY 3-MILE RANGE...

lang:en score:19 filesize: 7.41 M page_count: 56 document date: 2022-09-29