

ACTi A418

ACTI CORPORATION A418 6MP Network Outdoor Bullet Camera

USER MANUAL

1. Introduction

This manual provides comprehensive instructions for the installation, operation, and maintenance of the ACTI CORPORATION A418 6MP Network Outdoor Bullet Camera. Please read this manual thoroughly before using the product to ensure proper setup and optimal performance. Keep this manual for future reference.

2. Product Overview

The ACTI CORPORATION A418 is a robust 6-megapixel network outdoor bullet camera designed for high-quality surveillance. It features a 2.7-13.5mm 5X zoom lens with auto-focus capabilities, adaptive IR illumination for night vision up to 85 meters, and superior Wide Dynamic Range (WDR) of 150 dB for clear images in challenging lighting conditions. The camera supports H.265/H.264 video compression, delivers 1440p at 30 frames per second, and includes 3D Digital Noise Reduction (DNR). It is built with an IP68 weatherproof and IK10 vandal-proof metal casing, making it suitable for harsh outdoor environments. Connectivity options include PoE/DC12V power and an RJ45 connection.

Key Features:

- **Sensor:** 1/2.7" Progressive Scan CMOS with 3072 x 2048 resolution.
- **Lens:** 2.7-13.5mm, 5X Zoom Lens with Auto Focus.
- **IR Range:** Up to 85 meters with 4 IR LEDs (850 nm).
- **Image Enhancement:** Extreme WDR (150 dB) and 2D + 3D DNR.
- **Durability:** IP68 weatherproof and IK10 vandal-proof metal casing.
- **Connectivity:** RJ45 for network, PoE/DC12V for power.
- **Storage:** MicroSD/MicroSDHC/MicroSDXC card slot.



Figure 2.1: Front and side view of the ACTI CORPORATION A418 Bullet Camera. This image shows the camera's sleek, white, cylindrical body with a dark front lens housing and an integrated mounting bracket.

3. Components and Connections

The A418 camera comes with essential components for its operation. Familiarize yourself with the various ports and connections on the device.

Included Components:

- ACTI CORPORATION A418 6MP Network Outdoor Bullet Camera (1 unit)



Figure 3.1: Photo Indication of the ACTI CORPORATION A418 camera's ports and connections. This diagram labels the Ethernet Port (1), Digital Input/Output (2), Audio Input/Output (3), DC 12V Power Input (4), Reset Button (5), Analog Video Output Connector (6), and Memory Card Slot (7).

Connection Points Explained:

- **1. Ethernet Port:** RJ45 connector for network connection and Power over Ethernet (PoE).
- **2. Digital Input / Output (DI/DO):** For connecting external sensors or alarms.
- **3. Audio Input / Output:** For connecting external microphone and speaker.
- **4. DC 12V Power Input:** Alternative power input if PoE is not used.
- **5. Reset Button:** Used to restore factory default settings.
- **6. Analog Video Output Connector:** For local video output during installation or troubleshooting.
- **7. Memory Card Slot:** Supports MicroSD/MicroSDHC/MicroSDXC for local storage.

4. Setup and Installation

Proper installation is crucial for the camera's performance and longevity. The A418 is designed for outdoor security applications and can be mounted using optional accessories.

4.1 Physical Installation:

1. **Choose a Location:** Select a suitable outdoor location that provides the desired field of view and is within range of your network and power source. Consider the camera's IP68 weatherproof and IK10 vandal-proof ratings for optimal placement.
2. **Mounting:** Securely mount the camera using appropriate screws and mounting hardware (not included). Ensure the mounting surface can support the camera's weight (15.8 ounces).
3. **Adjust Angle:** Adjust the camera's angle and orientation to cover the desired surveillance area.

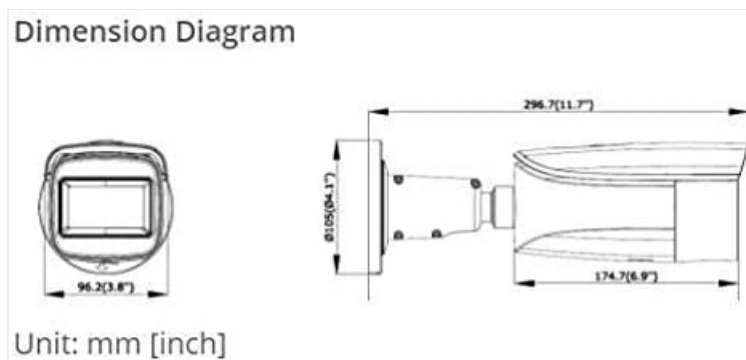


Figure 4.1: Dimension Diagram of the ACTI CORPORATION A418 camera. The diagram provides measurements in millimeters and inches, showing the camera's length (296.7mm / 11.7 inches), width (105mm / 4.1 inches), and height (105mm / 4.1 inches).

4.2 Power and Network Connection:

1. **Power Supply:** Connect the camera to power using either Power over Ethernet (PoE) via the RJ45 Ethernet port or by connecting a DC 12V power adapter to the DC 12V Power Input.
2. **Network Connection:** Connect an Ethernet cable from your network switch or router to the camera's RJ45 Ethernet Port. The camera supports Wi-Fi for wireless communication technology.
3. **MicroSD Card (Optional):** Insert a MicroSD/MicroSDHC/MicroSDXC card into the memory card slot for local video storage.

5. Operating the Camera

Once installed and connected, the camera can be accessed and configured through a network interface.

5.1 Initial Access:

1. **Discover Camera:** Use the manufacturer's provided software or a network scanner to discover the camera's IP address on your network.
2. **Login:** Access the camera's web interface by entering its IP address into a web browser. Log in using the default credentials (refer to the camera's quick start guide or manufacturer's website for default username/password).
3. **Change Password:** For security, immediately change the default password upon first login.

5.2 Configuration and Features:

- **Video Settings:** Configure video resolution (up to 6 MP, 3072 x 2048), frame rate (30 fps), compression (H.265/H.264), and image quality settings.
- **Lens Control:** Utilize the 5X optical zoom and auto-focus features to achieve a clear and precise view.
- **IR Illumination:** The adaptive IR LEDs automatically adjust intensity based on ambient light for optimal night vision up to 85 meters.
- **WDR and DNR:** Leverage Extreme WDR (150 dB) and 2D/3D DNR for improved image clarity in high-contrast or low-light scenes.
- **Motion Detection:** Set up motion-only alerts and configure detection zones and sensitivity.
- **Storage:** Configure recording to the inserted MicroSD card or a Network Video Recorder (NVR).
- **Audio:** If external audio devices are connected, configure audio input/output settings.

6. Maintenance

Regular maintenance ensures the longevity and optimal performance of your camera.

- **Cleaning:** Periodically clean the camera lens and housing with a soft, damp cloth. Do not use harsh chemicals

or abrasive materials.

- **Firmware Updates:** Check the ACTi website regularly for firmware updates. Keeping the firmware updated ensures access to the latest features, security patches, and performance improvements.
- **Cable Inspection:** Periodically inspect all cables and connections for any signs of wear or damage, especially in outdoor environments.

7. Troubleshooting

This section addresses common issues you might encounter with your A418 camera.

- **No Power:** Ensure both PoE and DC12V power sources are correctly connected and active. Check power cables and network cables for damage.
- **No Video Feed:** Verify network connectivity. Ensure the camera's IP address is correct and accessible. Check firewall settings on your network.
- **Poor Image Quality:** Clean the lens. Adjust focus and zoom settings. Check lighting conditions and ensure WDR/DNR settings are optimized.
- **Network Connection Issues:** Verify the Ethernet cable is securely connected. Check network settings (IP address, subnet mask, gateway). Ensure no IP address conflicts exist on the network.
- **Camera Unresponsive:** If the camera becomes unresponsive, try power cycling it. If the issue persists, use the reset button (refer to Figure 3.1) to restore factory default settings. Note that this will erase all custom configurations.

8. Specifications

Detailed technical specifications for the ACTI CORPORATION A418 camera.

Feature	Specification
Model Number	A418
Manufacturer	ACTI CORPORATION
Video Capture Resolution	6 MP (3072 x 2048)
Frame Rate	30 fps
Lens	2.7-13.5mm, 5X Zoom Lens
Focus Type	Auto Focus
IR Range	Up to 85 m
WDR	Extreme WDR (150 dB)
DNR	2D + 3D DNR
International Protection Rating	IP68
Vandal Resistance	IK10 (metal casing)
Power Source	PoE / DC12V


Feature	Specification
Connectivity Technology	Wireless (Wi-Fi), Wired (RJ45)
Storage	MicroSD/MicroSDHC/MicroSDXC
Form Factor	Bullet
Material	Metal
Item Dimensions (L x W x H)	11.7 x 4.1 x 4.1 inches
Item Weight	15.8 ounces
Recommended Uses	Outdoor Security
UPC	764227914365

9. Warranty and Support

For information regarding product warranty, please refer to the warranty card included with your purchase or visit the official ACTi Corporation website. Support resources, including FAQs, software downloads, and contact information, are also available on the manufacturer's website.

If you require technical assistance, please contact ACTi Corporation customer support or your authorized reseller.

Documents - ACTi – A418

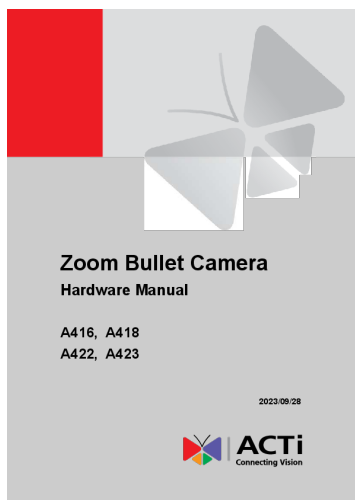

[ACTi Zoom Bullet Camera Hardware Manual: A416, A418, A422, A423](#)

This hardware manual provides comprehensive instructions for installing, connecting, and accessing ACTi Zoom Bullet Cameras, models A416, A418, A422, and A423. It covers setup procedures, physical descriptions, network configuration, and troubleshooting.

lang:en score:42 filesize: 1.45 M page_count: 30 document date: 2023-09-28

Bullet Camera

A418



6MP Zoom Bullet with D/N, IR, Superior WDR, SLLS, 5x Zoom Lens

- 6 Megapixel
- Day & Night with Superior Low Light Sensitivity and IR LED
- Superior WDR
- H.265 Compression
- Wide Angle
- Event trigger, response and notification

► Specifications

Device	
Product Type	Zoom Bullet
Maximum Resolution	6MP
Application Environment	Outdoor
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2.7"
Day Night	Yes
Low Light Sensitivity	Superior
Maximum Bandwidth	Color: 0.01 lux, 0.001 lux (0.02 lux)
Color to B/W Switch	MP (auto switch, configurable)
Mechanical IR Cut Filter	Yes
IR LED	80,000 x 4,000 (m)
IR Working Distance	40m (131ft)
Electronic Shutter	1/50-1/8000 (normal mode), 1/5-1/8000 (super slow mode)
Lens	
Front Length	Zoom: 82.7 (3.26in)
Aperture	f1.8

ACTi

www.acti.com

© 2019 ACTi Technology Inc. All rights reserved. ACTi, ACTi logo, ACTi products and services are trademarks of ACTi Technology Inc. in the United States and other countries. All other trademarks are the property of their respective owners.

Page 1 of 5

[\[pdf\]](#) User Manual Specifications Datasheet Accessories

Specifications ACTi A418 Datasheet winncom |||

Bullet Camera **A418** 6MP Zoom Bullet with D/N, IR, Superior WDR, SLLS, 5x Zoom Lens 6 Megapixel Day Night with Superior Low Light Sensitivity and IR LED Superior WDR H.265 Compression Wide Angle Event trigger, response and notification Specifications Device Product Type Maximum Resolution Applica... lang:en score:27 filesize: 357.61 K page_count: 5 document date: 0000-00-00

Bullet Camera

A418



6MP Zoom Bullet with D/N, IR, Extreme WDR, SLLS, 5x Zoom Lens

- 6 Megapixel
- Day & Night with Superior Low Light Sensitivity and IR LED
- Extreme WDR
- H.265 Compression
- Wide Angle
- Event trigger, response and notification

► Specifications

Device	
Product Type	Zoom Bullet
Maximum Resolution	6MP
Application Environment	Outdoor
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2.7"
Day Night	Yes
Low Light Sensitivity	Superior
Maximum Bandwidth	Color: 0.01 lux, 0.001 lux (0.02 lux)
Color to B/W Switch	MP (auto switch, configurable)
Mechanical IR Cut Filter	Yes
IR LED	80,000 x 4,000 (m)
IR Working Distance	40m (131ft)
Electronic Shutter	1/50-1/8000 (normal mode), 1/5-1/8000 (super slow mode)
IR Filter	10-08

ACTi

www.acti.com

© 2019 ACTi Technology Inc. All rights reserved. ACTi, ACTi logo, ACTi products and services are trademarks of ACTi Technology Inc. in the United States and other countries. All other trademarks are the property of their respective owners.

Page 1 of 5

[\[pdf\]](#) Specifications Datasheet Accessories

Specifications ACTi A418 Datasheet A1 a1securitycameras content product documents 54187 |||

Bullet Camera **A418** 6MP Zoom Bullet with D/N, IR, Extreme WDR, SLLS, 5x Zoom Lens 6 Megapixel Day Night with Superior Low Light Sensitivity and IR LED Extreme WDR H.265 Compression Wide Angle Event trigger, response and notification Specifications Device Product Type Maximum Resolution Applicati... lang:en score:27 filesize: 440.42 K page_count: 5 document date: 0000-00-00

Bullet Camera

A418



6MP Zoom Bullet with D/N, IR, Extreme WDR, SLLS, 5x Zoom Lens

- 6 Megapixel
- Day & Night with Superior Low Light Sensitivity and IR LED
- Extreme WDR
- H.265 Compression
- Built-in Analytics
- Event trigger, response and notification
- TAICS security Level 1 certified

► Specifications

Device	
Product Type	Zoom Bullet
Maximum Resolution	6MP
Application Environment	Outdoor
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2.7"
Day Night	Yes
Low Light Sensitivity	Superior
Maximum Bandwidth	Color: 0.01 lux, 0.001 lux (0.02 lux)
Color to B/W Switch	MP (auto switch, configurable)
Mechanical IR Cut Filter	Yes
IR LED	80,000 x 4,000 (m)
IR Working Distance	40m (131ft)
Electronic Shutter	1/50-1/8000 (normal mode), 1/5-1/8000 (super slow mode)
IR Filter	10-08
Lens	
Front Length	Zoom: 82.7 (3.26in)

ACTi

www.acti.com

© 2019 ACTi Technology Inc. All rights reserved. ACTi, ACTi logo, ACTi products and services are trademarks of ACTi Technology Inc. in the United States and other countries. All other trademarks are the property of their respective owners.

Page 1 of 5

[\[pdf\]](#) Specifications Accessories Borchure

ACTi A418 6 Megapixel Outdoor Network Ca PC Canada 1062367730 content etilize Manufacturer Brochure |||

Bullet Camera **A418** 6MP Zoom Bullet with D/N, IR, Extreme WDR, SLLS, 5x Zoom Lens 6 Megapixel Day Night with Superior Low Light Sensitivity and IR LED Extreme WDR H.265 Compression Wide Angle Built-in Analytics Event trigger, response and notification TAICS security Level 1 certified Specificatio...

lang:en score:25 filesize: 439.84 K page_count: 5 document date: 0000-00-00

One

E19



5MP Cube with Extreme WDR, SLLS, Fixed Lens

- 5 Megapixel
- Fixed Lens with f2.8mm/F1.8
- Extreme WDR
- H.265 Compression
- Super wide angle
- Event trigger, response and notification

► Specifications

Device	Color
Product Type	WAP
Maximum Resolution	800
Application Environment	Indoor
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2.5"
Effective Pixels	2,048,000 (1,920,000 (1.94 MP))
Day/Night	No
Low Light Sensitivity	Superior
Minimum Illumination	0.003 lux
Mechanical W.C.A.F.Rate	No
IEC60730	No
Electronic Shutter	1/5-1/60,000 (second phase-shutter); 1/5-1/60,000 (second (auto mode))
Horizontal Resolution (TV Line)	1080 TVL
S/N Ratio	71 dB

Z956

4MP Outdoor Speed Dome with D/N, Extreme WDR, ELLS, 33x Zoom Lens

- 4 Megapixel
- Day & Night with Extreme Low Light Sensitivity
- Extreme WDR
- Endless Pan & Tilt, "PTZ Auto Tracking"
- H.265 Compression
- Built-in Analytics
- Event trigger, response and notification

► Specifications

Device	
Product type	Speed Distro
Maximum Resolution	4K/30
Application Environment	Outdoor
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2.8"
Effective Pixels	20.00(19.8) H 15.00(15.0) V
Exp./Night	Yes
Low Light Sensitivity	Enhance
Color	Color (30FPS) or PT (30FPS) or; BGR (30FPS)
Microchannel W/ CuA Fiber	No
IR LED	No
Electronic Shutter	1/100000 second (shutter mode) 1/100000 second (pulse mode)
Self-Heal	75-80
Lens	
Front Length	2mm, M5.5-140.5mm

A422



4MP Zoom Bullet with D/N, IR, Extreme WDR, SLLS, 5x Zoom Lens

- 4 Megapixel
- Day & Night with Superior Low Light Sensitivity and IR LED
- Extreme WOR
- Super wide angle
- Taiwan IoT Cybersecurity Certification Level 1 (TAICS)
- Event trigger, response and notification

► Specifications

Device	
Product Type	Zenith 3400
Maximum Resolution	4096
Application Environment	On-Disk
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2" 1"
Effective Pixels	2688(H) X 1536(V) (4 MP)
Data /Frame	Yes
Low Light Sensitivity	Superior
Minimum Illumination	Color: 0.001 lux, B/W: 0.1 lux (F1.0, 1/30 sec)
Mechanical IR Cut Filter	Yes
IR LED	IR LED x 3 (950 nm)
IR Working Distance	85m
Electronic Shutter	5.5~1/100000 second (audio mode)
	20 fps

[\[pdf\]](#) User Manual Specifications Accessories

Specifications E19 icomtechinc images product manual |||

Cube E19 5MP Cube with Extreme WDR, SLLS, Fixed Lens 5 Megapixel Fixed Lens with f2.8mm/F1.8 Extrem ... E-0107 High PoE Injector IEEE 802.3at compliant, AC 100-240V, with universal connectors for A416, **A418**, B913, B923, B934, Q450, Q75, VMGB-60X, Z37, Z71, Z952 Network Storage Peripherals - Data S...

lang:en score:22 filesize: 248.49 K page_count: 4 document date: 0000-00-00

[\[pdf\]](#) User Manual Specifications Accessories

Specifications Z956 icomtechinc images product manual ||

Speed Dome Z956 4MP Outdoor Speed Dome with D/N, Extreme WDR, ELLS, 33x Zoom Lens 4 Megapixel Day ... E-0107 High PoE Injector IEEE 802.3at compliant, AC 100-240V, with universal connectors for A416, **A418**, B913, B923, B934, Q450, Q75, VMGB-60X, Z37, Z71, Z952 Audio Devices - Microphone PMIC-0100 ...

lang:en score:22 filesize: 349.16 K page_count: 5 document date: 0000-00-00

[\[pdf\]](#) User Manual Specifications Datasheet Accessories

See DataSheet A422 4MP Zoom Bullet with D N IR Extreme WDR SLLS 5x Lens IP Cameras iComTech
icomtechinc images product manual |||

Zoom Bullet A422 4MP Zoom Bullet with D/N, IR, Extreme WDR, SLLS, 5x Zoom Lens 4 Megapixel Day Ni ... om Bullet Related Products Mounting Accessories - Camera Mount PMAX-0407 Corner mount for A416, **A418**, B419-P2. PMAX-0524 Pole Mount for A416, **A418**, ,A419, A44, A45, A46, A48, VMGB-351, B419-P2 ... lang:en score:22 filesize: 483.72 K page_count: 5 document date: 0000-00-00

Zoom Bullet

A423



- 6 Megapixel
- Day & Night with Superior Low Light Sensitivity and IR LED
- 5x Zoom Lens with 12.7-13.5MP1/6, Auto Focus (for installation)
- Extreme WDR
- Super wide angle
- Taiwan IoT Cybersecurity Certification Level 1 (TISAC2)
- Event trigger, response and notification

Specifications

Device	
Product Type	Zoom Bullet
Resolution/Frame Rate	6MP
Application Environment	Outdoor
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2.7"
Effective Pixels	3060H x 2160V (3.1 : 18.46 MP)
Day/Night	Yes
Low Light Sensitivity	Superior
Minimum Illuminance	Color: 0.001Lux, B/W: 0.0001Lux (120°)
Maximum IR Cut-Off Filter	Yes
IR LED	81 LED x 3 (900 nm)
IR Working Distance	80m
Resolution/Frame Rate	1080P/30FPS, max (4:3 mode)
SN Ratio	50 dB

www.acti.com

2020/004

Page 1 of 1

[\[pdf\]](#) User Manual Specifications Datasheet Accessories

See DataSheet A423 6MP Zoom Bullet with D N IR Extreme WDR SLLS 5x Lens IP Cameras iComTech
icomtechinc images product manual |||

Zoom Bullet A423 6MP Zoom Bullet with D/N, IR, Extreme WDR, SLLS, 5x Zoom Lens 6 Megapixel Day Ni ... om Bullet Related Products Mounting Accessories - Camera Mount PMAX-0407 Corner mount for A416, **A418**, B419-P2. PMAX-0524 Pole Mount for A416, **A418**, ,A419, A44, A45, A46, A48, VMGB-351, B419-P2 ...
lang:en score:21 filesize: 484.53 K page_count: 5 document date: 0000-00-00

Camera Mount

PMAX-0407



Corner Mount (for A416, A418)

Specifications

Device	
Product Type	Camera Mount
Description	Corner Mount (for A416, A418)
General	
Weight	1882g (4.15lb)
Dimensions	126mm x 105mm x 250mm (5.0" x 4.1" x 9.8")
Color	White
Warranty	1 Year(s). For extended warranty offering, see http://www.acti.com/support/warranty

Related Products

Bullet - Zoom Bullet

A416  6MP Zoom Bullet with CMOS, Adaptive IR, Extreme WDR, SLLS, 5x Zoom lens, 12.7-13.5MP1/6, Auto Focus (for installation), Superior Low Light Sensitivity, IR LED, Taiwan IoT Cybersecurity Certification Level 1 (TISAC2), PMS, 81 LED (900nm), 80m

A418  6MP Zoom Bullet with CMOS, Adaptive IR, Extreme WDR, SLLS, 5x Zoom lens, 12.7-13.5MP1/6, Auto Focus (for installation), Superior Low Light Sensitivity, IR LED, Taiwan IoT Cybersecurity Certification Level 1 (TISAC2), PMS, 81 LED (900nm), 80m

www.acti.com

2020/004

Page 1 of 1

[\[pdf\]](#) Specifications Dimension Guide Warranty Accessories

PMAX 0407 Specs sheet ACTi Corner mount for A416 and A418 surveillance video media lanot
attachments customimport |||

Camera Mount PMAX-0407 Corner Mount for A416, **A418** Specifications Device Product Type Description General Weight Dimensions Color Warranty Camera Mount Corner Mount for A416, **A418** 1882g 4.15lb W x H x D : 126mm x 105mm x 250mm 4.96 x 4.13 x 9.84 White 1 Year s . For extended warranty...
lang:en score:21 filesize: 133.99 K page_count: 1 document date: 0000-00-00

Camera Mount

PMAX-0721



Junction Box (for A416, A418, A419, Z76)

Specifications

Device	
Product Type	Camera Mount
Description	Junction Box (for A416, A418, A419, Z76)
General	
Weight	535g (1.179lb)
Dimensions	137mm x 53.4mm x 164.8mm (5.39" x 2.10" x 6.49")
Material	Aluminum
Color	White
Warranty	1 Year(s). For extended warranty offering, see http://www.acti.com/support/warranty

Related Products

Bullet - Zoom Bullet

A416  6MP Zoom Bullet with CMOS, Adaptive IR, Extreme WDR, SLLS, 5x Zoom lens, 12.7-13.5MP1/6, Auto Focus (for installation), Superior Low Light Sensitivity, IR LED, Taiwan IoT Cybersecurity Certification Level 1 (TISAC2), PMS, 81 LED (900nm), 80m

www.acti.com

2020/004

Page 1 of 1

[\[pdf\]](#) Specifications Dimension Guide Warranty Accessories

PMAX 0721 Specs sheet ACTi Junction Box for A416 A418 A419 Z76 surveillance video media lanot
attachments customimport |||

Camera Mount PMAX-0721 Junction Box for A416, **A418**, A419, Z76 Specifications Device Product Type Description General Weight Dimensions Material Color Warranty Camera Mount Junction Box for A416, **A418**, A419, Z76 535g 1.179lb W x H x D : 137mm x 53.4mm x 164.8mm 5.39 x 2.10 x 6.49 Alum...
lang:en score:20 filesize: 146.91 K page_count: 2 document date: 0000-00-00

Speed Dome

B923



3MP Indoor Speed Dome with D/N, Extreme WDR, SLLS, 30x Zoom Lens

- 3 Megapixel
- Day & Night with Superior Low Light Sensitivity
- 30x Zoom Lens with H.265-153mmF1.6/F4.8, DC Iris, Auto Focus
- Extreme WDR
- Endless Pan & Tilt
- H.265 Compression
- Event Trigger, response and notification

Specifications

Device	Speed Dome
Product Type	3MP
Maximum Resolution	3MP
Application Environment	Indoor
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2.7"
Effective Pixels	2966(H) x 1530(V) (2.1 MP)
Day/Night	Yes
Low Light Sensitivity	Superior
Minimum Illuminance	Color: 0.001 lux @ F1.6, 0.05 lux @ F4.8, 0.002 lux @ F1.6
Color to B/W Switch	MP (auto switch, configurable)
Mechanical IR Cut Filter	Yes
IR Illuminator Range	100-1500m
IR LED	Yes
IR Working Distance	15-150000 (normal mode), 15-150000 (auto mode)
Electronic Shutter	1/50-1/10000 (normal mode), 1/5-1/10000 (auto mode)
Horizontal Resolution (TV Lines)	1800 TVL

www.acti.com

100-150000 (normal mode), 15-150000 (auto mode)

Page 1 of 2

[\[pdf\]](#) User Manual Specifications Datasheet Accessories

See DataSheet B923 3MP Indoor Speed Dome with D N Extreme WDR SLLS 30x Zoom Lens IP

Cameras iComTech icomtechinc images product manual |||

Speed Dome B923 3MP Indoor Speed Dome with D/N, Extreme WDR, SLLS, 30x Zoom Lens 3 Megapixel Day ... E-0107 High PoE Injector IEEE 802.3at compliant, AC 100-240V, with universal connectors for A416, **A418**, B913, B923, B934, Q450, Q75, VMGB-60X, Z37, Z71, Z952 Network Storage Peripherals - Data S...

lang:en **score:19** filesize: 502.21 K page_count: 7 document date: 0000-00-00

Bullet Camera

A418



6MP Zoom Bullet with D/N, IR, Extreme WDR, SLLS, 5x Zoom Lens

- 6 Megapixel
- Day & Night with Superior Low Light Sensitivity and IR LED
- Extreme WDR
- H.265 Compression
- Wide Angle
- Built-in Analytics
- Event Trigger, response and notification

Specifications

Device	Zoom Bullet
Product Type	6MP
Maximum Resolution	6MP
Application Environment	Outdoor
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2.7"
Day/Night	Yes
Low Light Sensitivity	Superior
Minimum Illuminance	Color: 0.01 lux @ F1.6, 0.05 lux @ F4.8, 0.002 lux @ F1.6
Color to B/W Switch	MP (auto switch, configurable)
Mechanical IR Cut Filter	Yes
IR LED	IR LED x 4 (800 nm)
IR Working Distance	100-1500m
Electronic Shutter	1/50-1/10000 (normal mode), 1/5-1/10000 (auto mode)
Lens	
Zoom Length	Zoom: 0.7-13.5mm
Aperture	F1.6

www.acti.com

100-150000 (normal mode), 15-150000 (auto mode)

Page 1 of 2

[\[pdf\]](#) Specifications Accessories

123securityproducts 6 Megapixel Day Night with Superior Low Light Sensitivity and IR LED Extreme

WDR H 265 Compression Wide Angle Built in Analytics Event trigger response notification A418

lanotattachments file id 159200 store 1 |||

Bullet Camera **A418** 6MP Zoom Bullet with D/N, IR, Extreme WDR, SLLS, 5x Zoom Lens 6 Megapixel Day Night with Superior Low Light Sensitivity and IR LED Extreme WDR H.265 Compression Wide Angle Built-in Analytics Event trigger, response and notification Specifications Device Product Type Maximum R...

lang:en **score:19** filesize: 439.64 K page_count: 5 document date: 0000-00-00

Bullet Camera

A416



4MP Zoom Bullet with D/N, IR, Extreme WDR, SLLS, 5x Zoom Lens

- 4 Megapixel
- Day & Night with Superior Low Light Sensitivity and IR LED
- 5x Zoom Lens with 0.7-13.5F1.6, Auto focus (for installation)
- Extreme WDR
- H.265 Compression
- Super wide angle
- Built-in Analytics
- Event Trigger, response and notification
- TACS security Level 1 certified

Specifications

Device	Zoom Bullet
Product Type	4MP
Maximum Resolution	4MP
Application Environment	Outdoor
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2.7"
Effective Pixels	2966(H) x 1530(V) (2.1 MP)
Day/Night	Yes
Low Light Sensitivity	Superior
Minimum Illuminance	Color: 0.01 lux @ F1.6, 0.05 lux @ F4.8, 0.002 lux @ F1.6
Color to B/W Switch	MP (auto switch, configurable)
Mechanical IR Cut Filter	Yes
IR LED	IR LED x 4 (800 nm)
IR Working Distance	100-1500m
Electronic Shutter	1/50-1/10000 (normal mode), 1/5-1/10000 (auto mode)
SHR Index	30-40

www.acti.com

100-150000 (normal mode), 15-150000 (auto mode)

Page 1 of 3

[\[pdf\]](#) Specifications Accessories Borchure

ACTi A416 4 Megapixel Outdoor Network Ca Tech America 1061442019 content etilize Manufacturer Brochure |||

Bullet Camera A416 4MP Zoom Bullet with D/N, IR, Extreme WDR, SLLS, 5x Zoom Lens 4 Megapixel Day ... et Camera Related Products Mounting Accessories - Camera Mount PMAX-0407 Corner mount for A416, **A418**, B419-P2. PMAX-0524 Pole Mount for A416, **A418**, ,A419, A44, A45, A46, A48, VMGB-351, B419-P2 ...

lang:en **score:19** filesize: 440 K page_count: 5 document date: 0000-00-00

A313




4MP Mini Bullet with D/N, IR, Extreme WDR, SLLS, Fixed Lens

- 4 Megapixel
- Day & Night with Superior Low Light Sensitivity and IR LED
- Fixed Lens with 2.8mm/F1.6
- Extreme WOR
- Wide Angle
- Taiwan IoT Cybersecurity Certification Level 1 (TACB)
- Event trigger, response and notification

► Specifications

Device	
Product Type	Mini-Docker
Maximum Resolution	4K
Application Environment	Outdoor
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2.1"
Effective Pixels	20.74 million (5120x3840)
Color Depth	Yes
Low Light Sensitivity	Exponent
Minimum Illumination	Color: 0.001Lux, B/W: 0.0012(L1.0)
IR Illumination	Yes
IR LED	16 LED x 2 (3000 mW)
IR Working Distance	40m
Electronic Shutter	1/5-1/100000 (mixed pixel)
ISO Ratio	75-185

PMAX-0524

Pole Mount (for A44, A45, A46, A48, A416, A418, VMGB-351), supports 2.64" to 5" Poles

► Specifications

Device	
Product Type	Cinema Board
Description	Pole Board (for A44, A45, A46, A48, A49, A410, V40SD, V40T) supports 2.0A to 5" Poles
General	
Weight	903.3g (1.243lb)
Dimensions	20" x 14" x 11.5" (508mm x 354mm x 292mm)
Material	Stainless Steel
Color	White
Warranty	1 Year(s) For extended warranty offering, see http://www.sch.com/ugp/ugw/warranty

► **Related Products**

Bullet - Zoom Bullet

A118 4MP Zoom Bullet with DRI, Adaptive IR, Extreme WDR, SLLS, 5x Zoom lens, 0.7-13.5mm F1.8 (HCV 134° 2P), DC vs, H.265+/264, 1440p/30fps, 2x DPM, Audio, Mov/Div/MoCo/DHCoMoCo/DRC, PoE/DC/2V, PIR, IK03 (metal casing), OSD

A821



6MP Outdoor Zoom Dome with D/N, IR
Extreme WDR, SLLS, 5x Zoom Lens

- 6 Megapixel
- Day & Night with Superior Low Light Sensitivity and IR LED
- 6x Zoom Lens with f2.7-13.5/F1.6, Auto focus (for installation)
- Extreme WDR
- H.265 Compression
- Super wide angle
- Taiwan IoT Cybersecurity Certification Level 1 (TAICS)
- Event trigger, response and notification

► Specifications

Device	
Product Type	Zoom Dome
Maximum Resolution	8MP
Algorithmic Enhancement	Onboard
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2" x 1"
Effective Pixels	8,300,000 x 7,680,000 (x 1 @ 40 FPS)
Day/Night	Yes
Low Light Sensitivity	Superior
Minimum Illumination	Color: 0.001 lux, B/W: 0.001 (2.0 lx) m
Mechanical IR Cut Filter	Yes
IR LED	60 LED (x 1000 mW)
IR Working Distance	80m
Electronic Shutter	1/1 to 1/100,000 (variable push mode)
ISO Range	75-48

[\[pdf\]](#) User Manual Specifications Datasheet Accessories

See DataSheet A313 4MP Mini Bullet with D N IR Extreme WDR SLLS Fixed Lens IP Cameras

iComTech icomtechinc images product manual |||

Mini Bullet A313 4MP Mini Bullet with D/N, IR, Extreme WDR, SLLS, Fixed Lens 4
Megapixel Day Nigh ... E-0107 High PoE Injector IEEE 802.3at compliant, AC 100-
240V, with universal connectors for A416, **A418**, B913, B923, B934, Q450, Q75,
VMGB-60X, Z37, Z71, Z952 www.acti.com 2024/7/28 For product a...

lang:en score:19 filesize: 339.48 K page_count: 5 document date: 0000-00-00

[\[pdf\]](#) Specifications Dimension Guide Warranty Accessories

PMAX 0524 SpecsSheet ACTi Pole Mount for A44 A45 A46 A48 A416 A418 VMGB 351 Supports 2 64 to 5
Poles surveillance video media lanot attachments customimport |||

Camera Mount PMAX-0524 Pole Mount for A44, A45, A46, A48, A416, **A418**, VMGB-351 , supports 2.64 to 5 Poles Specifications Device Product Type Description General Weight Dimensions Material Color Warranty Camera Mount Pole Mount for A44, A45, A46, A48, A416, **A418**, VMGB-351 , supports 2.64 to ...

lang:en score:19 filesize: 192.99 K page_count: 2 document date: 0000-00-00

[\[pdf\]](#) User Manual Specifications Datasheet Accessories

See DataSheet A821 6MP Outdoor Zoom Dome with D N IR Extreme WDR SLLS 5x Lens IP Cameras

iComTech icomtechinc images product manual |||

Zoom Dome A821 6MP Outdoor Zoom Dome with D/N, IR, Extreme WDR, SLLS, 5x Zoom Lens 6 Megapixel Day ... E-0107 High PoE Injector IEEE 802.3at compliant, AC 100-240V, with universal connectors for A416, **A418**, B913, B923, B934, Q450, Q75, VMGB-60X, Z37, Z71, Z952 Audio Devices - Microphone PMIC-0100 ...

lang:en score:18 filesize: 297.3 K page count: 5 document date: 0000-00-00

Zoom Dome

A820



4MP Outdoor Zoom Dome with D/N, IR, Extreme WDR, SLLS, 5x Zoom Lens

- 4 Megapixel
- Day & Night with Superior Low Light Sensitivity and IR LED
- Extreme WDR
- Super wide angle
- Taiwan IoT Cybersecurity Certification Level 1 (TACSI)
- Event trigger, response and notification

► Specifications

Device	Zoom Dome
Product Type	Zoom Dome
Maximum Resolution	4MP
Application Environment	Outdoor
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2.7"
Effective Pixels	2860H x 1490V (4.0 MP)
Day/Night	Yes
Low Light Sensitivity	Superior
Minimum Illuminance	Color: 0.001Lux (0.01 lux @ f1.2)
Mechanical IR Cut Filter	Yes
IR LED	IR LED x 3 (980 nm)
IR Working Distance	40m
Resolution/Frame	1080P/30FPS (audio mode)
OSD Menu	70-99

www.acti.com

© 2024 Acti Systems Inc. All rights reserved. All trademarks are the property of their respective owners. Page 1 of 3

[pdf] User Manual Specifications Datasheet Accessories

See DataSheet A820 4MP Outdoor Zoom Dome with D N IR Extreme WDR SLLS 5x Lens IP Cameras

iComTech icomtechinc images product manual |||

Zoom Dome A820 4MP Outdoor Zoom Dome with D/N, IR, Extreme WDR, SLLS, 5x Zoom Lens 4 Megapixel Day ... E-0107 High PoE Injector IEEE 802.3at compliant, AC 100-240V, with universal connectors for A416, **A418**, B913, B923, B934, Q450, Q75, VMGB-60X, Z37, Z71, Z952 Audio Devices - Microphone PMIC-0100 ...

lang:en score:18 filesize: 297.33 K page_count: 5 document date: 0000-00-00

Zoom Bullet

A426



5MP Zoom Bullet with D/N, Adaptive IR, Extreme WDR, SLLS, 4.4x Zoom Lens

- 5 Megapixel
- Day & Night with Superior Low Light Sensitivity and Adaptive IR LED
- Extreme WDR
- H.265 Compression
- Super wide angle
- Built-in Analytics
- Event trigger, response and notification

► Specifications

Device	Zoom Bullet
Product Type	Zoom Bullet
Maximum Resolution	5MP
Application Environment	Outdoor
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2.7"
Effective Pixels	2860H x 1490V (4.0 MP)
Day/Night	Yes
Low Light Sensitivity	Superior
Minimum Illuminance	Color: 0.001Lux (0.01 lux @ f1.2)
Mechanical IR Cut Filter	Yes
IR LED	IR LED x 3 (980 nm)
IR Working Distance	40m
Resolution/Frame	1080P/30FPS (audio mode)
OSD Menu	70-99

www.acti.com

© 2024 Acti Systems Inc. All rights reserved. All trademarks are the property of their respective owners. Page 1 of 3

[pdf] User Manual Specifications Datasheet Accessories

See DataSheet A426 5MP Zoom Bullet with D N Adaptive IR Extreme WDR SLLS 4 4x Lens IP Cameras

iComTech icomtechinc images product manual |||

Zoom Bullet A426 5MP Zoom Bullet with D/N, Adaptive IR, Extreme WDR, SLLS, 4.4x Zoom Lens 5 Megapix ... E-0107 High PoE Injector IEEE 802.3at compliant, AC 100-240V, with universal connectors for A416, **A418**, B913, B923, B934, Q450, Q75, VMGB-60X, Z37, Z71, Z952 www.acti.com 2024/7/28 For product a...

lang:en score:18 filesize: 381.42 K page_count: 6 document date: 0000-00-00

Zoom Dome

A826



5MP Outdoor Zoom Dome with D/N, Adaptive IR, Extreme WDR, SLLS, 4.4x Zoom Lens

- 5 Megapixel
- Day & Night with Superior Low Light Sensitivity and Adaptive IR LED
- 4.4x Zoom Lens with 12.7 (2mm) 1.6, P-iris, Auto Focus (IR mode)
- Extreme WDR
- H.265 Compression
- Super wide angle
- Built-in Analytics
- Event trigger, response and notification

► Specifications

Device	Zoom Dome
Product Type	Zoom Dome
Maximum Resolution	5MP
Application Environment	Outdoor
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2.7"
Effective Pixels	2860H x 1490V (4.0 MP)
Day/Night	Yes
Low Light Sensitivity	Superior
Minimum Illuminance	Color: 0.001Lux (0.01 lux @ f1.2)
Mechanical IR Cut Filter	Yes
IR LED	IR LED x 3 (980 nm)
IR Working Distance	40m
Resolution/Frame	1080P/30FPS (audio mode)
OSD Menu	70-99

www.acti.com

© 2024 Acti Systems Inc. All rights reserved. All trademarks are the property of their respective owners. Page 1 of 3

[pdf] User Manual Specifications Datasheet Accessories

See DataSheet A826 5MP Outdoor Zoom Dome with D N Adaptive IR Extreme WDR SLLS 4 4x Lens IP Cameras iComTech icomtechinc images product manual |||

Zoom Dome A826 5MP Outdoor Zoom Dome with D/N, Adaptive IR, Extreme WDR, SLLS, 4.4x Zoom Lens 5 Meg ... E-0107 High PoE Injector IEEE 802.3at compliant, AC 100-240V, with universal connectors for A416, **A418**, B913, B923, B934, Q450, Q75, VMGB-60X, Z37, Z71, Z952 www.acti.com 2024/7/28 For product a...

lang:en score:18 filesize: 326.69 K page_count: 4 document date: 0000-00-00

Bullet Camera

A421



- 8MP Face, People and Car Detection Zoom Bullet with D/N, Adaptive IR, Extreme WDR, SLLS, 4.3x Zoom Lens
- Face, People and Car Detection
- 4 Megapixel with IR, Ultra HD
- Day & Night with Superior Low Light Sensitivity and Adaptive IR LED
- 4.3x Zoom Lens with 12.7-13.5F1.3, Auto focus (for installation)
- Extreme WDR
- H.265 Compression
- Super wide angle
- Event trigger, response and notification

Specifications

Device	
Product Type	Zoom Bullet
Maximum Resolution	8MP
Product Application	Face, People and Car Detection
Application Environment	Outdoor
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2.8"
Effective Pixels	3264(H) x 2048(V) (4.3x MP)
Day/Night	Yes
Low Light Sensitivity	Superior
Minimum Illumination	Color: 0.02 lux @ F1.3, 0.01 lux @ F1.3, 0.001 lux @ F1.3
Mechanical IR Cut Filter	Yes
IR LED	Adaptive IR LED
IR Working Distance	15m
Electronic Shutter	1/5-1/6000 (normal internal mode), 1/5-1/6000 (second audio mode)
Horizontal Resolution (TV Lines)	2800 TVL

ACTi

www.acti.com

Page 1 of 3

[pdf] User Manual Specifications Accessories

A421 8MP Face People and Car Detection Zoom Bullet with D N Adaptive IR Extreme WDR SLLS 4 3x

Lens IP Cameras iComTech icomtechinc images product manual |||

Bullet Camera A421 8MP Face, People and Car Detection Zoom Bullet with D/N, Adaptive IR, Extreme WD ... ole Mount for A44, A45, A46, A48, A413 , supports 2 to 3 Poles PMAX-0524 Pole Mount for A416, **A418**, ,A419, A44, A45, A46, A48, VMGB-351, B419-P2 , supports 2.64 to 5 Poles PMAX-0706 Junction...

lang:en score:18 filesize: 283.36 K page_count: 5 document date: 0000-00-00

Bullet Camera

A416



- 4MP Zoom Bullet with D/N, IR, Extreme WDR, SLLS, 5x Zoom Lens
- 4 Megapixel
- Day & Night with Superior Low Light Sensitivity and IR LED
- 5x Zoom Lens with 12.7-13.5F1.6, Auto focus (for installation)
- Extreme WDR
- H.265 Compression
- Super wide angle
- Built-in Analytics
- Event trigger, response and notification

Specifications

Device	
Product Type	Zoom Bullet
Maximum Resolution	4MP
Product Application	Face, People and Car Detection
Application Environment	Outdoor
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2.8"
Effective Pixels	2560(H) x 1536(V) (4 MP)
Day/Night	Yes
Low Light Sensitivity	Superior
Minimum Illumination	Color: 0.02 lux @ F1.3, 0.01 lux @ F1.3, 0.001 lux @ F1.3
Mechanical IR Cut Filter	Yes
IR LED	Adaptive IR LED
IR Working Distance	15m
Electronic Shutter	1/5-1/6000 (normal internal mode), 1/5-1/6000 (second audio mode)
Horizontal Resolution (TV Lines)	2800 TVL

ACTi

www.acti.com

Page 1 of 3

[pdf] Specifications Accessories

Product Documents ACTi A416 network surveillance camera bullet AS Capital Datortehnika IT risinājumi

Serviss bfc95309 7433 46f3 af16 81ed500c8b62 capital lv media ows |||

Bullet Camera A416 4MP Zoom Bullet with D/N, IR, Extreme WDR, SLLS, 5x Zoom Lens 4 Megapixel Day ... Camera Related Products Mounting Accessories - Camera Mount PMAX-0407 Corner mount for A416 and **A418**. PMAX-0524 Pole Mount for A416, **A418**, ,A419, A44, A45, A46, A48, VMGB-351 , supports 2.64 t...

lang:en score:18 filesize: 439.64 K page_count: 5 document date: 0000-00-00

Zoom Bullet

A425



- 2MP Face, People and Car Detection Zoom Bullet with D/N, Adaptive IR, Extreme WDR, SLLS, 4.3x Zoom Lens
- Face, People and Car Detection
- 2 Megapixel (Support 1080P)
- Day & Night with Superior Low Light Sensitivity and Adaptive IR LED
- 4.3x Zoom Lens with 12.7-13.5F1.3, Auto focus (for installation)
- Extreme WDR
- Super wide angle
- Event trigger, response and notification

Specifications

Device	
Product Type	Zoom Bullet
Maximum Resolution	2MP
Product Application	Face, People and Car Detection
Application Environment	Outdoor
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2.8"
Effective Pixels	1920(H) x 1080(V) (2 MP)
Day/Night	Yes
Low Light Sensitivity	Superior
Minimum Illumination	Color: 0.02 lux @ F1.3, 0.01 lux @ F1.3, 0.001 lux @ F1.3
Mechanical IR Cut Filter	Yes
IR LED	Adaptive IR LED
IR Working Distance	15m
Electronic Shutter	1/5-1/6000 (normal internal mode), 1/5-1/6000 (second audio mode)
Horizontal Resolution (TV Lines)	2800 TVL

www.acti.com

Page 1 of 3

[pdf] User Manual Specifications Datasheet Accessories

See DataSheet A425 2MP Face People and Car Detection Zoom Bullet with D N Adaptive IR Extreme

WDR ELLS 4 3x Lens IP Cameras iComTech icomtechinc images product manual |||

Zoom Bullet A425 2MP Face, People and Car Detection Zoom Bullet with D/N, Adaptive IR, Extreme WDR, ... ole Mount for A44, A45, A46, A48, A413 , supports 2 to 3 Poles PMAX-0524 Pole Mount for A416, **A418**, ,A419, A44, A45, A46, A48, VMGB-351, B419-P2 , supports 2.64 to 5 Poles PMAX-0706 Junction...

lang:en score:18 filesize: 349.95 K page_count: 5 document date: 0000-00-00

A416



4MP Zoom Bullet with D/N, IR, Extreme WDR, SLLS, 5x Zoom Lens

- 4 Megapixel
- Day & Night with Superior Low Light Sensitivity and IR LED
- 6x Zoom Lens with f2.7-13.5/F1.6, Auto focus (for installation)
- Extreme WDR
- H.265 Compression
- Super wide angle
- Built-in Analytics
- Event trigger, response and notification

► Specifications

Product Name	Zoro Bulb
Material Type	60°
Application Environment	Outdoor
Input Sensor	Progressive Scan CMOS
Sensor Size	1/2"
Effective Pixels	(2868x1700)/1920
Light Intensity	Superior
Low Light Sensitivity	Color 0.01 lux @ f2.8(ISO=160), 0.001 lux @ f4.0(AE=AE-1, EV=+4) (LED light)
Image Resolution	Superior
Control	IPF keypad/wired, configurable
Mechanical Shock Ratio	Yes
W LED	R1 LED x 1 (3000 mK)
W Viewing Distance	Max 7' (16m)
Electronic Shutter	1/30 - 1/60000 (stepped pulsed mode)
SD Media	SD-45

A423



6MP Zoom Bullet with D/N, IR, Extreme WDR, SLLS, 5x Zoom Lens

- 6 Megapixel
- Day & Night with Superior Low Light Sensitivity and IR LED
- 5x Zoom Lens with 12.7-13.5F1.6, Auto focus (for installation)
- Extreme WDR
- Super wide angle
- Taiwan IoT Cybersecurity Certification Level 1 (TAICSB)
- Event trigger, response and notification

► Specifications

Device	
Product Type	Zoom Butler
Maximum Resolution	4K
Application Environment	Outdoor
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2.7"
Effective Pixels	3840K x 2160K (8.3 x 4.6 MP)
Color Filter	Yes
Low Light Sensitivity	Superior
Electronic Shutter	Color: 0.001 to 1/8000 (1/8000) sec
Mechanical IR Cut Filter	Yes
IR LED	3 (LED x 3 (550 nm))
IR Working Distance	40m
Electronic Shutter	1/5 to 1/8000 (second (audio mode))
SDI Ratio	4K
SDI Ratio	4K

A46



5MP Zoom Bullet with D/N, Adaptive IR
Extreme WDR, SLLS, 5x Zoom Lens

- 5 Megapixel
- Day & Night with Superior Low Light Sensitivity and Adaptive IR LED
- Six Zoom Lens with f2.7-13.5/F1.4-F3.3, Auto focus (for installation)
- Extreme WDR
- H.265 Compression
- Wide Angle
- Event trigger, response and notification

► Specifications

Device	
Product Type	Zoom Bar
Maximum Resolution	1080p
Application Environment	Outdoor
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2.8"
Effective Pixels	9296 x 5464 (5.1 MP)
ISO†	Yes
Low Light Sensitivity	Superior
Minimum Illumination	Color: 0.2 Lux, B/W: 0.02 Lux
Color to B/W Switch	APP manual switch, configurable
Microbial B-Cu Filter	Yes
IR LED	Adaptive IR LED
IR Working Distance	3km
Recording Encoder	Yes (H.265 second (mainstream), 15-16Mbit/s second (sub-stream))
Video Rate	50FPS

[\[pdf\]](#) Specifications Accessories

A416 SpecsSheet ACTi 4 MP Outdoor Network IR Bullet Camera 2 7 13 5mm Lens 123 Security Products
123securityproducts lanotattachments file id 159199 store 1 |||

Bullet Camera A416 4MP Zoom Bullet with D/N, IR, Extreme WDR, SLLS, 5x Zoom Lens 4 Megapixel Day ... Camera Related Products Mounting Accessories - Camera Mount PMAx-0407 Corner mount for A416 and **A418**. PMAx-0524 Pole Mount for A416, **A418**, ,A419, A44, A45, A46, A48, VMGB-351 , supports 2.64 t...

lang:en score:18 filesize: 439.63 K page_count: 5 document date: 0000-00-00

[\[pdf\]](#) Specifications Accessories

A423 SpecsSheet ACTi 6 Megapixel Network IR Zoom Bullet Camera with 2 7 13 5mm Lens 123 Security Products 123securityproducts lanotattachments file id 197948 store 1 |||

Zoom Bullet A423 6MP Zoom Bullet with D/N, IR, Extreme WDR, SLLS, 5x Zoom
Lens 6 Megapixel Day Ni ... om Bullet Related Products Mounting Accessories -
Camera Mount PMAX-0407 Corner mount for A416, **A418**, B419-P2. PMAX-0524
Pole Mount for A416, **A418**, ,A419, A44, A45, A46, A48, VMGB-351, B419-P2 ...
lang:en score:17 filesize: 515.66 K page_count: 6 document date: 0000-00-00

[\[pdf\]](#) User Manual Specifications Accessories Borchure

A46 Acti Bullet Camera DirectDial Canada 1062367713 content etilize Manufacturer Brochure |||

Bullet Camera A46 5MP Zoom Bullet with D/N, Adaptive IR, Extreme WDR, SLLS, 5x Zoom Lens 5 Megapixe ... ole Mount for A44, A45, A46, A48, A413 , supports 2 to 3 Poles PMAX-0524 Pole Mount for A416, **A418**, ,A419, A44, A45, A46, A48, VMGB-351 , supports 2.64 to 5 Poles PMAX-0706 Junction Box for...

lang:en score:17 filesize: 363.04 K page count: 5 document date: 0000-00-00

Zoom Bullet

A422



- 4 Megapixel
- Day & Night with Superior Low Light Sensitivity and IR LED
- Extreme WDR (150dB)
- Super wide angle
- Deep Learning AI
- Tenable IoT Cybersecurity Certification Level 1 (TACCS)
- Event trigger, response and notification

Specifications

Device	
Product Type	Zoom Bullet
Maximum Resolution	4MP
Application Environment	Outdoor
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2.7"
Effective Pixels	2868K (2.12M) (0.48 MP)
Day/Night	Yes
Low Light Sensitivity	Superior
Minimum Illuminance	Color: 0.001Lux @F1.3, 0.001Lux @F1.3 (0.001Lux @F1.3)
Mechanical IR Cut Filter	Yes
IR LED	RL LED x 3 (90° view)
IR Working Distance	50m
Resolution (HDMI)	1080P (1080P standard (audio mode))
SD/Hub	70-DB

www.acti.com

© 2020 ACTI. All rights reserved. ACTI is a registered trademark of ACTI. All other trademarks are the property of their respective owners.

Page 1 of 3

[pdf] Specifications Datasheet Accessories

ACTi A422 Datasheet A1 4MP Outdoor Bullet IP Security Camera with 2.7-13.5mm Lens and Built In IR x41ordl5 a1securitycameras content product documents 66323 |||

Zoom Bullet A422 4MP Deep Learning AI Zoom Bullet with D/N, IR, Extreme WDR, SLLS, 5x Zoom Lens 4 M ... om Bullet Related Products Mounting Accessories - Camera Mount PMAX-0407 Corner mount for A416, **A418**, B419-P2. PMAX-0524 Pole Mount for A46, A421, A422, A423, A425, VMGB-359 , supports 2.64 to... lang:en score:16 filesize: 518.07 K page_count: 6 document date: 0000-00-00

Bullet Camera

A421



- Face, People and Car Detection
- 8 Megapixel with 8K Ultra HD
- Day & Night with Superior Low Light Sensitivity and Adaptive IR LED
- 8.3x Zoom Lens with (2.7-12P) 1.3, Auto focus (for installation)
- Extreme WDR
- H.265 Compression
- Super wide angle
- Built-in Analytics
- Event trigger, response and notification

Specifications

Device	
Product Type	Zoom Bullet
Maximum Resolution	8MP
Application Environment	Outdoor
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2.7"
Effective Pixels	2868K (2.12M) (0.48 MP)
Day/Night	Yes
Low Light Sensitivity	Superior
Minimum Illuminance	Color: 0.001Lux @F1.3, 0.001Lux @F1.3 (0.001Lux @F1.3)
Mechanical IR Cut Filter	Yes
IR LED	Adaptive IR LED
IR Working Distance	50m
Resolution (HDMI)	1080P (1080P standard (audio mode))
SD/Hub	70-DB

www.acti.com

© 2020 ACTI. All rights reserved. ACTI is a registered trademark of ACTI. All other trademarks are the property of their respective owners.

Page 1 of 3

[pdf] User Manual Specifications Datasheet Accessories

ACTi A421 Datasheet winncom |||

Bullet Camera A421 8MP Face, People and Car Detection Zoom Bullet with D/N, Adaptive IR, Extreme WD ... ole Mount for A44, A45, A46, A48, A413 , supports 2 to 3 Poles PMAX-0524 Pole Mount for A416, **A418**, ,A419, A44, A45, A46, A48, VMGB-351, B419-P2 , supports 2.64 to 5 Poles PMAX-0706 Junction... lang:en score:16 filesize: 352.78 K page_count: 5 document date: 0000-00-00

Bullet Camera

A46



- 5 Megapixel
- Day & Night with Superior Low Light Sensitivity and Adaptive IR LED
- 5x Zoom Lens with (2.7-13.5P) 1.4-F3.3, Auto focus (for installation)
- Extreme WDR
- H.265 Compression
- Wide Angle
- Event trigger, response and notification

Specifications

Device	
Product Type	Zoom Bullet
Maximum Resolution	5MP
Application Environment	Outdoor
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2.7"
Effective Pixels	2868K (2.12M) (0.48 MP)
Day/Night	Yes
Low Light Sensitivity	Superior
Minimum Illuminance	Color: 0.001Lux @F1.3, 0.001Lux @F1.3 (0.001Lux @F1.3)
Mechanical IR Cut Filter	Yes
IR LED	Adaptive IR LED
IR Working Distance	50m
Resolution (HDMI)	1080P (1080P standard (audio mode))
SD/Hub	70-DB

www.acti.com

© 2020 ACTI. All rights reserved. ACTI is a registered trademark of ACTI. All other trademarks are the property of their respective owners.

Page 1 of 3

[pdf] User Manual Specifications Datasheet Accessories

Specifications ACTi A46 Datasheet A1 a1securitycameras content product documents 54303 |||

Bullet Camera A46 5MP Zoom Bullet with D/N, Adaptive IR, Extreme WDR, SLLS, 5x Zoom Lens 5 Megapixe ... ole Mount for A44, A45, A46, A48, A413 , supports 2 to 3 Poles PMAX-0524 Pole Mount for A416, **A418**, ,A419, A44, A45, A46, A48, VMGB-351, B419-P2 , supports 2.64 to 5 Poles PMAX-0706 Junction... lang:en score:16 filesize: 352.18 K page_count: 5 document date: 0000-00-00

Bullet Camera

A45



2MP Zoom Bullet with D/N, Adaptive IR, Extreme WDR, ELLS, 4.3x Zoom Lens

- 2 Megapixel
- Day & Night with Extreme Low Light Sensitivity and Adaptive IR LED
- 4.3x Zoom Lens with 12.8-128F1.4 F2.8, Auto focus (for installation)
- Extreme WDR
- H.265 Compression
- Wide Angle
- Event trigger, response and notification

Specifications

Device	Zoom Bullet
Resolution	2MP
Application Environment	Outdoor
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2.8"
Effective Pixels	1920(H) x 1080(V) (2 MP)
Shutter Speed	1/50
Low Light Sensitivity	Enhance
Minimum Illumination	Color: 0.05Lux @ F1.4, 0.001 Lux @ F1.4 (AGC ON)
Color to B/W Switch	IP (manual switch, auto-switch)
Mechanical IR Cut Filter	No
IR Illumination Range	100 ~ 110m
IR LED	Adaptive IR LED
IR Working Distance	50m
Electronic Shutter	1/5 ~ 1/65536 (normal manual mode), 1/5 ~ 1/65536 (normal auto mode)

www.acti.com

Page 1 of 5

[\[pdf\]](#) User Manual Specifications Datasheet Accessories

Specifications ACTi A45 Datasheet A1 a1 security cameras content product documents 54300 ||| Bullet Camera A45 2MP Zoom Bullet with D/N, Adaptive IR, Extreme WDR, ELLS, 4.3x Zoom Lens 2 Megapi ... ole Mount for A44, A45, A46, A48, A413 , supports 2 to 3 Poles PMAX-0524 Pole Mount for A416, **A418**, ,A419, A44, A45, A46, A48, VMGB-351, B419-P2 , supports 2.64 to 5 Poles PMAX-0706 Junction... lang:en **score:16** filesize: 353.25 K page_count: 5 document date: 0000-00-00

Bullet Camera

A45



2MP Zoom Bullet with D/N, Adaptive IR, Extreme WDR, ELLS, 4.3x Zoom Lens

- 2 Megapixel
- Day & Night with Extreme Low Light Sensitivity and Adaptive IR LED
- 4.3x Zoom Lens with 12.8-128F1.4 F2.8, Auto focus (for installation)
- Extreme WDR
- H.265 Compression
- Wide Angle
- Event trigger, response and notification

Specifications


Device	Zoom Bullet
Resolution	2MP
Application Environment	Outdoor
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2.8"
Effective Pixels	1920(H) x 1080(V) (2 MP)
Shutter Speed	1/50
Low Light Sensitivity	Enhance
Minimum Illumination	Color: 0.05Lux @ F1.4, 0.001 Lux @ F1.4 (AGC ON)
Color to B/W Switch	IP (manual switch, auto-switch)
Mechanical IR Cut Filter	No
IR Illumination Range	100 ~ 110m
IR LED	Adaptive IR LED
IR Working Distance	50m
Electronic Shutter	1/5 ~ 1/65536 (normal manual mode), 1/5 ~ 1/65536 (normal auto mode)

www.acti.com

Page 1 of 5

[\[pdf\]](#) User Manual Specifications Accessories

A45 Specs sheet ACTi 2 Megapixel Outdoor Network IR Bullet Camera 8 12mm Lens surveillance video media lanot attachments customimport ||| Bullet Camera A45 2MP Zoom Bullet with D/N, Adaptive IR, Extreme WDR, ELLS, 4.3x Zoom Lens 2 Megapi ... ole Mount for A44, A45, A46, A48, A413 , supports 2 to 3 Poles PMAX-0524 Pole Mount for A416, **A418**, ,A419, A44, A45, A46, A48, VMGB-351 , supports 2.64 to 5 Poles PMAX-0706 Junction Box for... lang:en **score:16** filesize: 364.1 K page_count: 5 document date: 0000-00-00

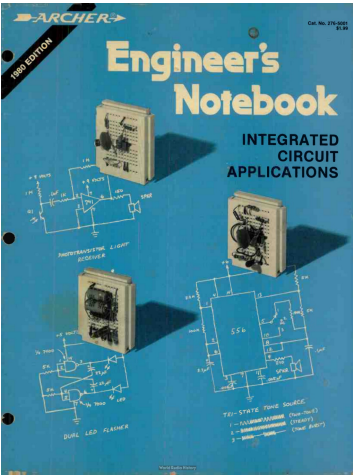

[\[pdf\]](#) Reference Guide Guide

Radio Shack Semiconductor Reference Guide Notebook worldradiohistory BOOKSHELF ARH Technology ||| Aep-ARCHER_I Engineer s Cat. No. 276-5001 1.99 Noteboo 1 1 4. 1vote s ime le j 3 be, sPaz ... A417-153 A417-154 A417-176 A417-182 A417-184 A417-190 A417-196 A417-200 A417-201 A417-205 A417-235 **A418** A419 A420 A422- A A427 A429- 0981-12 A454 A465-181-19 A466 A467 A467 25 A467A A467B A467C A4670... lang:en **score:16** filesize: 46.39 M page_count: 942 document date: 2023-08-28

Bullet Camera

A44



- 12MP Face, People and Car Detection Zoom Bullet with D/N, Adaptive IR, Extreme WDR, SLLS, 3x Zoom Lens
- Face, People and Car Detection
- 12 Megapixel with 4x Ultra HD
- Day & Night with Superior Low Light Sensitivity and Adaptive IR LED
- 3x Zoom Lens with 0.6-11mm(F1.5, P-Auto, Auto Focus 30x Installation)
- Extreme WDR
- H.265 Compression
- Super video angle
- Event trigger, response and notification

Specifications

Device	
Product Type	Zoom Bullet
Maximum Resolution	12MP
Application Environment	Face, People and Car Detection
Application Environment	Indoor
Image Sensor	Progressive Scan CMOS
Sensor Size	1/1.7"
Effective Pixels	4020K & 3000K (12.4 MP)
Day / Night	Yes
Low Light Sensitivity	Superior
Maximum Resolution	Color: 10.8 MP @ F1.5, B/W: 5.0 MP @ F1.5
Color to B/W Switch	MP (auto switch, configurable)
Mechanical IR Cut Filter	Yes
IR Illumination Range	100-1100m
IR LED	Adaptive IR LED
IR Illumination Distance	300m
Resolution (H x V)	1920x1080 (normal manual mode), 1920x1080 (normal auto mode)

www.acti.com

Page 1 of 3

[pdf] User Manual Specifications Accessories

A44 Specs sheet ACTi 12 Megapixel Outdoor Network IR Bullet Camera 3 6 11mm Lens surveillance video media lanot attachments customimport |||

Bullet Camera A44 12MP Face, People and Car Detection Zoom Bullet with D/N, Adaptive IR, Extreme WD ... ole Mount for A44, A45, A46, A48, A413 , supports 2 to 3 Poles PMAX-0524 Pole Mount for A416, **A418**, ,A419, A44, A45, A46, A48, VMGB-351 , supports 2.64 to 5 Poles PMAX-0706 Junction Box for...

lang:en score:16 filesize: 367.52 K page_count: 6 document date: 0000-00-00

Bullet Camera

A46



- 5MP Zoom Bullet with D/N, Adaptive IR, Extreme WDR, SLLS, 5x Zoom Lens
- 5 Megapixel
- Day & Night with Superior Low Light Sensitivity and Adaptive IR LED
- 5x Zoom Lens with 2.7-13.5P1.6-F3.3, Auto focus (30x Installation)
- Extreme WDR
- H.265 Compression
- Wide Angle
- Event trigger, response and notification

Specifications

Device	
Product Type	Zoom Bullet
Maximum Resolution	5MP
Application Environment	Indoor
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2.8"
Effective Pixels	4020K & 3000K (5.0 MP)
Day / Night	Yes
Low Light Sensitivity	Superior
Maximum Resolution	Color: 5.0 MP @ F1.5, B/W: 2.0 MP @ F1.5
Color to B/W Switch	MP (auto switch, configurable)
Mechanical IR Cut Filter	Yes
IR LED	Adaptive IR LED
IR Illumination Distance	300m
Resolution (H x V)	1920x1080 (normal manual mode), 1920x1080 (normal auto mode)
Resolution (H x V) (HDMI)	1080i (74)

www.acti.com

Page 1 of 3

[pdf] User Manual Specifications Accessories

A46 Specs sheet ACTi 5 Megapixel Outdoor Network IR Bullet Camera 2 7 13 5mm Lens surveillance video media lanot attachments customimport |||

Bullet Camera A46 5MP Zoom Bullet with D/N, Adaptive IR, Extreme WDR, SLLS, 5x Zoom Lens 5 Megapixe ... ole Mount for A44, A45, A46, A48, A413 , supports 2 to 3 Poles PMAX-0524 Pole Mount for A416, **A418**, ,A419, A44, A45, A46, A48, VMGB-351 , supports 2.64 to 5 Poles PMAX-0706 Junction Box for...

lang:en score:16 filesize: 363.05 K page_count: 5 document date: 0000-00-00

Speed Dome

Z956



- 4MP Outdoor Speed Dome with D/N, Extreme WDR, ELLS, 33X Zoom Lens
- 4 Megapixel
- Day & Night with Extreme Low Light Sensitivity
- Extreme WDR
- Endless Pan & Tilt, PTZ Auto Tracking
- H.265 Compression
- Build-in Analytics
- Event trigger, response and notification

Specifications

Device	
Product Type	Speed Dome
Maximum Resolution	4MP
Application Environment	Indoor
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2.8"
Effective Pixels	4020K & 3000K (4.0 MP)
Day / Night	Yes
Low Light Sensitivity	Extreme
Maximum Resolution	Color: 4.0 MP @ F1.5 (H265), B/W: 2.0 MP @ F1.5
Mechanical IR Cut Filter	Yes
IR LED	No
Electronic Shutter	1/100000 (normal manual mode), 1/100000 (normal auto mode)
SDI Input	75 ohm

Lens	
Fixed Length	Zoom: 4.5-148mm

www.acti.com

Page 1 of 3

[pdf] User Manual Specifications Accessories

Z956 Specs sheet ACTi 4 Megapixel Network Outdoor Speed Dome Camera with 33X Lens 123 Security Products 123securityproducts lanotattachments file id 197975 store 1 |||

Speed Dome Z956 4MP Outdoor Speed Dome with D/N, Extreme WDR, ELLS, 33x Zoom Lens 4 Megapixel Day ... E-0106 High PoE Injector IEEE 802.3at compliant, AC 100-240V, with universal connectors for A416, **A418**, B913, B923, B934, Q450, Q75, VMGB-60X, Z37, Z71, Z952 Audio Devices - Microphone PMIC-0100 ...

lang:en score:15 filesize: 339.59 K page_count: 5 document date: 0000-00-00




[\[pdf\]](#) Specifications Datasheet Dimension Guide Warranty Accessories

ACTi PMAX 0524 Datasheet A1 a1securitycameras content product documents 54185 |||

Camera Mount PMAX-0524 Pole Mount for A46, A48, A416, **A418**, A421, A425, VMGB-352, VMGB-359 , supports 2.64 to 5 Poles Specifications Device Product Type Description General Weight Dimensions Color Material Warranty Camera Mount Pole Mount for A46, A48, A416, **A418**, A421, A425, VMGB-352, VMGB...

lang:en score:14 filesize: 200.69 K page_count: 2 document date: 0000-00-00

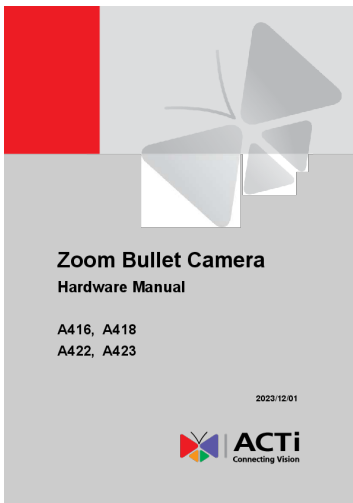

[\[pdf\]](#) User Manual Installation Guide Instructions

Karen Analee 1100187 bhphotovideo lit files |||

Zoom Bullet Camera Hardware Manual A416, **A418** A422, A423 2023/12/01

Hardware Manual Table of Contents Precautions 4 Safety Instructions

..... 6 Introduction 7 List of Models.....

lang:en score:14 filesize: 1.42 M page_count: 31 document date: 2023-12-01

GeoVision

Contents

Version 18.3.5 2024-09-10	2
Version 18.3.4 2024-09-06	3
Version 18.3.3 2024-04-26	3
Version 18.3.2 2023-07-27	5
Version 18.3.1 2023-07-05	9
Version 18.3.0 2023-04-01	10
Version 18.2.1 2020-11-04	14
Version 18.2.0 2020-10-30	14
Version 18.1.1 2020-05-17	16
Version 18.1.0 2020-03-16	17
Version 17.4.3 2020-04-26	22
Version 17.4.7 2023-03-28	25
Version 17.4.6A 2023-03-16	25
Version 17.4.3 2023-03-17	26
Version 17.4.5B 2023-11-04	29
Version 17.4.5A 2022-07-04	29
Version 17.4.3 2023-04-14	29
Version 17.4.4 2021-12-27	30
Version 17.4.3 2021-08-26	31
Version 17.4.2 2021-08-06	32
Version 17.4.1 2020-11-24	35
Version 17.4.0 2020-10-26	36
Version 17.3.0 2019-09-17	39
Version 17.2.1 2019-06-18	40
Version 17.2.0 2019-05-27	40
Version 17.1.1 2018-08-04	44
Version 17.1.0 2018-05-02	45
Version 16.11.0 2017-08-01	49
Version 16.10.0 2017-04-26	49
Version 15.11.0 2016-10-09	52
Version 15.11.0 2016-10-21	52
Version 15.11.0 2016-08-14	52
Version 15.11.0 2016-08-02	52
Version 15.10.0 2016-08-02	54
Version 14.10.0 2016-03-04	57

Version History 1 10/4/2024

[pdf] User Manual

Version History GV VMS GeoVision 4 ott 2024 — Support for Cloud Patch V18 3 2 10 the following IP devices 9 11 o EBD2705 EBDP5800 VMSHistory dlcdn geovision tw Manual EN |||

Contents Version 18.3.5 2024-09-10 work disk or storage system exceeds 512 bytes Inability to use the zoom function of connected ACTi **A418** IP cameras Issue of Use Remote Authentication being disabled when GV-VMS automatically resta...

lang:de score:13 filesize: 928.08 K page_count: 57 document date: 2024-10-04

Dome Camera

Z710

8MP Outdoor Mini Dome with D/N, Adaptive IR, Superior WDR, SLLS, Fixed Lens



- 8 Megapixel
- Day & Night with Superior Low Light Sensitivity and Adaptive IR LED
- Fixed Lens with 12.8mm F2.0
- Superior WDR
- H.265 Compression
- Wide Angle

► Specifications

Device	
Product Type	Mini Dome
Maximum Resolution	8MP
Resolution Enhancement	4K/8K
Image Sensor	Progressive Scan CMOS
Sensor Size	1/1"
Opt. Input	Yes
Low Light Sensitivity	Superior
Minimum Illumination	Color: 0.05 Lux @ F2.0 (AGC on); B/W: 0.01 Lux (LED on)
Backdoor IR Cut Filter	Yes
IR LED	Adaptive IR LED (850nm)
IR Working Distance	40m
Electronic Shutter	1 ~ 1/100000 second (shutter mode); 1 ~ 1/100000 second (auto mode)
SD/HD	30-96

Lens

Fixed Length	Fixed/Varied: 0.18m
--------------	---------------------

www.acti.com

Page 1 of 1

[pdf] User Manual Specifications Datasheet Accessories

winncom ACTi Z710 Datasheet |||

Dome Camera Z710 8MP Outdoor Mini Dome with D/N, Adaptive IR, Superior WDR, SLLS, Fixed Lens 8 Mega ... E-0101 High PoE Injector IEEE 802.3at compliant, AC 100-240V, with universal connectors for A416, **A418**, B913, B923, B934, Q450, Q75, VMGB-400, VMGB-603, VMGB-604, Z36, Z37, Z71, Z710, Z952 www.act...

lang:en score:13 filesize: 494.59 K page_count: 4 document date: 0000-00-00

Mini Bullet

Z317



4MP Mini Bullet with D/N, Adaptive IR, Superior WDR, SLLS, Fixed Lens

- 4 Megapixel
- Day & Night with Superior Low Light Sensitivity and Adaptive IR LED
- Fixed Lens with 12.8mm F2.0
- Superior WDR
- H.265 Compression
- Wide Angle
- Built-in Analytics
- Event Trigger, response and notification

► Specifications

Device	Mini Bullet
Product Type	Mini Bullet
Maximum Resolution	4MP
Application Environment	Outdoor
Image Sensor	Progressive Scan CMOS
Sensor Size	1/3"
Day-Night	Yes
Low Light Sensitivity	Superior
Minimum Illumination	Color: 0.005 lux at F2.0 (0.001 lux) B/W: 0.001 lux (0.1 lux)
IR LED	Yes
IR LED Wavelength	850nm (IR LED x 2, 2000 mW)
IR Illumination Distance	100m
Electronic Shutter	1/100000 second (manual mode), 1/100000 second (auto mode)
Analytics	AI-ON
Lens	
Fixed Length	Fixed Lens: 12.8mm

www.acti.com

© 2024 ACTI. All rights reserved. ACTI and the ACTI logo are trademarks of ACTI. All other trademarks are the property of their respective owners.


Page 1 of 4

[\[pdf\]](#) User Manual Specifications Datasheet Accessories

ACTi Z317 Datasheet winncom |||

Mini Bullet Z317 4MP Mini Bullet with D/N, Adaptive IR, Superior WDR, SLLS, Fixed Lens 4 Megapixel ... E-0107 High PoE Injector IEEE 802.3at compliant, AC 100-240V, with universal connectors for A416, **A418**, B913, B923, B934, Q450, Q75, VMGB-60X, Z37, Z71, Z952 www.acti.com 2024/7/28 For product a...

lang:en score:13 filesize: 226.86 K page_count: 4 document date: 0000-00-00

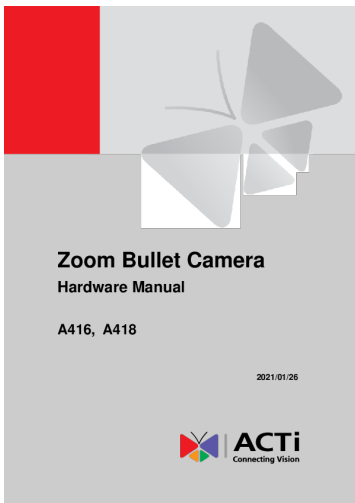

Zoom Bullet Camera

Hardware Manual

A416, A418

2021/01/26

ACTi
Connecting Vision

[\[pdf\]](#) User Manual Installation Guide Instructions

Karen Analee 961740 bhphotovideo lit files |||

Zoom Bullet Camera Hardware Manual A416, **A418** 2021/01/26 Hardware Manual

Table of Contents Precautions 4 Safety Instructions

..... 6 Introduction 7 List of Models.....

lang:en score:13 filesize: 1.32 M page_count: 27 document date: 2021-01-26

Metadata Camera

VMGB-410



2MP Metadata Camera with Day/Night, IR LED, Built-in Automatic License Plate Recognition

- 2 Megapixel Metadata Camera
- Day & Night with IR LED
- Built-in Automatic License Plate Recognition
- Event Trigger, response and notification

► Specifications

Device	Metadata Camera
Product Type	Metadata Camera
Maximum Resolution	2MP
Product Application	Automatic License Plate Recognition
Application Environment	Outdoor
Image Sensor	Progressive Scan CMOS
Sensor Size	1/3"
Day-Night	Yes
Low Light Sensitivity	Color: 0.005 lux at F2.0 (0.001 lux) B/W: 0.001 lux (0.1 lux)
Minimum Illumination	Yes
IR LED	Adaptive IR LED (850nm)
IR Illumination Distance	100m
Electronic Shutter	1/100000 second (manual mode), 1/100000 second (auto mode)
Analytics	AI-ON
Lens	
Fixed Length	Zoom: 12.8mm
Aperture	F1.8 F2.0

www.acti.com

© 2024 ACTI. All rights reserved. ACTI and the ACTI logo are trademarks of ACTI. All other trademarks are the property of their respective owners.

Page 1 of 3

[\[pdf\]](#) Specifications Accessories

VMGB 410 Specs sheet ACTi 2 Megapixel Network IR Outdoor Bullet Camera with 8 12mm Lens 123

Security Products 123securityproducts lanotattachments file id 179864 store 1 |||

Metadata Camera VMGB-410 2MP Metadata Camera with Day/Night, IR LED, Built-in Automatic License Pla ... E-0101 High PoE Injector IEEE 802.3at compliant, AC 100-240V, with universal connectors for A416, **A418**, B913, B923, B934, Q450, Q75, VMGB-400, VMGB-603, VMGB-604, Z36, Z37, Z71, Z710, Z952 PPOE-01...

lang:en score:12 filesize: 197.56 K page_count: 3 document date: 0000-00-00



Device	
Product Type	PtC Injector
Description	High PtC injector IEEE 802.3at compliant, AC 100-240V, with universal connectors (for AA16, AA10, B913, B823, B834, G455, Q15, 58A09-608, Z37, Z71, Z932)
General	
Weight	200g (0.44lb)
Dimensions	8. x W x H: 35mm x 32.5mm x 140mm (2.17" x 1.28" x 5.51")

Bullet - Zoom Bullet	
AG2	B&P Zoom Bullet with DRI, R, Extreme HD, 8 LBS, 4.3x Zoom lens, 0.7-11 Servo (1) (HDV 102 8' 32 8' 2'), H 265M 264, 3D DNR, Audio, MonoSD MonoSD42 MonoSD40, P46DC12V, PWR, W10 (metal casing), (M00)
AG2	B&P Zoom Bullet with DRI, R, Extreme HD, 8 LBS, 4.3x Zoom lens, 0.8 - 11 Servo (1) (HDV 102 1' 34 8' 2'), H 265M 264, 3D DNR, Audio, MonoSD MonoSD42 MonoSD40, P46DC12V, PWR, W10 (metal casing), (M00)

VMGB-606

Device	
Product Type	Metabolic Camera
Maximum Resolution	4M ²
Product Application	Face Recognition
Application Environment	Indoor
Image Sensor	Progressive Scan CMOS
Sensor Size	5.5" x 5"
Color Output	Yes
Maximum Resolution	Color: 0.0001 lux @ F1.2, 3000 rows; BW: 0.0001 lux @ F1.2, 3000 rows; 3.3 μs, 30 dB, 1000 rows
IR Illuminated / OLP Filter	Yes
IR LED	Adaptive IR LED (850 nm)
IR Working Distance	30m
Electronic Shutter	1/1000000 second (auto mode)

Aperture	F1.2-F2.5
Zoom Ratio	4.3x optical zoom

VMGB-605

Device	
Product Type	Metabole Camera
Maximum Resolution	4MP
Product Application	Face Recognition
Application Environment	Indoor
Image Sensor	Progressive Scan CMOS
Sensor Size	5.1 x 4"
Day / Night	Yes
Maximum Bandwidth	Color: 0.0005 km of P1.2 (60C vs), 0.001 km of P1.2 (40C vs), 0.001 km (B) LED vs
Minimum IR Cut Filter	Adaptive IR LED (950 nm)
Video	40FPS @ 1080P
IR Illumination Distance	50m
Electronic Shutter	1/300000 (second shutter mode)

Aperture	F5.7-F11.73
Zoom Ratio	4x optical zoom

lang:en score:12 filesize: 332.53 K page_count: 3 document date: 0000-00-00

lang:en score:12 filesize: 180.95 K page_count: 3 document date: 0000-00-00

lang:en score:12 filesize: 181.14 K page count: 3 document date: 0000-00-00

Zoom Dome

VMGB-607



- 4MP Face Recognition
- Day & Night with Superior Low Light Sensitivity and Adaptive IR LED
- Extreme WDR
- Event trigger, response and notification

Specifications

Device	Zoom Dome
Product Type	Zoom Dome
Maximum Resolution	4MP
Product Application	Face Recognition
Image Sensor	Progressive Scan CMOS
Sensor Size	1/1.8"
Day/Night	Yes
Low Light Sensitivity	Superior
Mechanical IR Cut Filter	Yes
IR LED	Adaptive IR LED (980nm)
IR Working Distance	30m
Electronic Shutter	1/5~1/100000 second (auto mode)
Lens	
Fixed Length	Zoom, IR 0.0mm
Aperture	F1.6 F1.75

www.acti.com

Page 1 of 4

[pdf] Specifications Accessories

VMGB 607 Specsheel ACTi 4 Megapixel Network IR Face Recognition Outdoor Zoom Dome Camera with 8 32mm Lens 123 Security Products 123securityproducts lanotattachments file id 197959 store 1 ||| Zoom Dome VMGB-607 4MP Face Recognition Outdoor Zoom Dome with D/N, Adaptive IR, Extreme WDR, SLLS, ... E-0101 High PoE Injector IEEE 802.3at compliant, AC 100-240V, with universal connectors for A416, **A418**, B913, B923, B934, Q450, Q75, VMGB-400, VMGB-603, VMGB-604, Z36, Z37, Z71, Z710, Z952 PPOE-01...

lang:en score:12 filesize: 261.06 K page_count: 4 document date: 0000-00-00

PoE Injector

PPOE-0101



High PoE Injector IEEE 802.3at compliant, AC 100-240V, with universal connectors for A416, A418, B913, B923, B934, Q450, Q75, VMGB-400, VMGB-603, VMGB-604, Z36, Z37, Z71, Z710, Z952

Specifications

Device	PoE Injector
Product Type	PoE Injector
Original Model	PPOE-0101
Description	High PoE Injector IEEE 802.3at compliant, AC 100-240V, with universal connectors for A416, A418, B913, B923, B934, Q450, Q75, VMGB-400, VMGB-603, VMGB-604, Z36, Z37, Z71, Z710, Z952
Network	
Ethernet Port	PoE 1 port(s) Ethernet 10/100/1000 Base T, RJ45 connector
General	
PoE Standard	IEEE 802.3at
PoE Input	Maximum 30 Watts per port
PoE Power Budget	Maximum 30 W
Power Cord	1.5m 2P
Power Source	AC 100-240V, 50/60 Hz
Weight	200g (0.44lb)
Dimensions	86 (x) 42 (x) 22 (mm) 3.39 (x) 1.65 (x) 0.87 (in) 1.38" x 0.51" x 0.37"
Standard Accessories	Universal power connector

www.acti.com

Page 1 of 2

[pdf] Specifications Datasheet Dimension Guide Warranty Accessories

PPOE 0101 A1 Security Cameras Sep 11 2022 · 6MP Zoom Bullet with D N IR Extreme WDR SLLS 5x lens f2 7 13 5mm F1 6 HOV 82 2° 28 7° Auto Focus for installation ACTi Datasheet srsltid AfmBOpn8aSWw lrt8K681NoGphruQl46l61jEv9jvUt2qR3M5TeTzwS a1securitycameras content product documents 44580 |||

PoE Injector PPOE-0101 High PoE injector IEEE 802.3at compliant, AC 100-240V, with universal connectors for A416, **A418**, B913, B923, B934, Q450, Q75, VMGB-400, VMGB603, VMGB-604, Z36, Z37, Z71, Z710, Z952 Specifications Device Original Manufacturer Product Type Original Model Description Network...

lang:en score:12 filesize: 292.28 K page_count: 3 document date: 0000-00-00

Prólogo

376



- 2 Megapixel
- Day & Night with Superior Low Light Sensitivity and Adaptive IR LED
- Fixed Lens with 12.8mm F2.0
- Basic WDR
- H.265 Compression
- Super wide angle
- Event trigger, response and notification

Specifications

Device	Dome
Product Type	Dome
Maximum Resolution	2MP
Product Application	Surveillance
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2.7"
Day/Night	Yes
Low Light Sensitivity	Superior
Mechanical IR Cut Filter	Yes
IR LED	Adaptive IR LED (980nm)
IR Working Distance	30m
Electronic Shutter	1/5~1/100000 second (auto mode)
Video Rate	30fps
Lens	
Fixed Length	Fixed Lens 12.8mm
Aperture	F2.0

www.acti.com

Page 1 of 4

[pdf] User Manual

Nueva Nissan X Trail e POWER Manual 07 08 2023 nissan cdn net content dam ar Manuales ||| 3,1 Prlogo HT33A1-1AFE2D99-602C-4A56-ABEA-11760E1C40F2 Este manual se ha preparado para ayudarle ... 34,1 ASIENTOS HT33A1-18BD8867-DE8C-4585-BEF1-DD984EC9CB4F ASIENTOS DELANTEROS HT33A1-85C968F1-**A418**-40A7-8EBB-06AE500A830F ADVERTENCIA: No ajuste el asiento del conductor mientras conduce a fin d...

lang:es score:12 filesize: 5.56 M page_count: 565 document date: 2023-04-26

Dome Camera

Z76



- 2 Megapixel
- Day & Night with Superior Low Light Sensitivity and Adaptive IR LED
- Fixed Lens with 12.8mm F2.0
- Basic WDR
- H.265 Compression
- Super wide angle
- Event trigger, response and notification

Specifications

Device	Dome
Product Type	Dome
Maximum Resolution	2MP
Product Application	Surveillance
Image Sensor	Progressive Scan CMOS
Sensor Size	1/2.7"
Day/Night	Yes
Low Light Sensitivity	Superior
Mechanical IR Cut Filter	Yes
IR LED	Adaptive IR LED (980nm)
IR Working Distance	30m
Electronic Shutter	1/5~1/100000 second (auto mode)
Video Rate	30fps
Lens	
Fixed Length	Fixed Lens 12.8mm
Aperture	F2.0

www.acti.com

Page 1 of 4

[pdf] Specifications Accessories

Z76 Specsheel ACTi 2 Megapixel Outdoor IR Network Dome Camera 8mm Lens surveillance video media lanot attachments customimport ||| Dome Camera Z76 2MP Outdoor Dome with D/N, Adaptive IR, Basic WDR, SLLS, Fixed Lens 2 Megapixel Day ... e Camera Related Products Mounting Accessories - Camera Mount PMA-0721 Junction Box for A416, **A418**, A419, Z76 Note: Some mounting accessories may need additional accessories for installation.... lang:en score:12 filesize: 278.15 K page_count: 4 document date: 0000-00-00

Metadata Camera

VMGB-351



2MP Metadata Camera with Day/Night, IR LED, Built-in Temperature Measurement, Fire Detection, Security Surveillance

- 2 Megapixel Thermal and Optical Metadata Camera
- Day & Night with IR LED
- Built-in Temperature Measurement, Fire Detection, Security Surveillance
- Not available in the USA

► Specifications

Product Type	Metadata Camera
Maximum Resolution	2MP
Product Application	Temperature Measurement, Fire Detection, Security Surveillance
Application Environment	Indoor
Description	Thermal and Optical network bullet camera for industrial products. Functions which is based on these technology objectives are: Line clearing, detection and also enter and exit can be provided. deliver pictures. The thermal imaging module is for different fire detection and fire prevention.
Image Sensor	Progressive Scan CMOS - 7 Thermal sensor
Signal Size	Optical: 12.5°
Effective Pixels	Thermal: 1600H x 1200V
Storage Format	8-16bit
Thermal Resolution	60-120 degree at F1.0
Optical Resolution	2.74 mm
Day/Night	Yes
Line Light Sensitivity	Superior
Mechanical IR Cut Filter	Yes
IR LED	Address: 80-120-980-980 mm
IR Working Distance	40m

ACTI

www.acti.com

File content may be subject to change without notice. All rights reserved. All trademarks are the property of their respective owners.

Page 1 of 3

[pdf] Specifications Accessories

VMGB 351 Specsheet ACTi 2 Megapixel IR Network Bullet Camera 6.2mm and 6mm Lens surveillance video media lanot attachments customimport |||

Metadata Camera VMGB-351 2MP Metadata Camera with Day/Night, IR LED, Built-in Temperature Measureme ... mm inch Related Products Mounting Accessories - Camera Mount PMA-X0524 Pole Mount for A416, **A418**, ,A419, A44, A45, A46, A48, VMGB-351 , supports 2.64 to 5 Poles Note: Some mounting accessor...

lang:en score:11 filesize: 214.29 K page_count: 3 document date: 0000-00-00