

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [GROHE](#) /

› [GROHE Euphoria 310 CoolTouch Thermostatic Shower System \(Model 26726EN0\) User Manual](#)

GROHE 26726EN0

GROHE Euphoria 310 CoolTouch Thermostatic Shower System (Model 26726EN0) User Manual

Brushed Nickel Infinity Finish, 1.75 gpm

1. PRODUCT OVERVIEW

The GROHE Euphoria 310 CoolTouch Thermostatic Shower System is engineered to provide a comfortable and safe showering experience. This system features advanced thermostatic technology to maintain consistent water temperature and includes both a large rain shower head and a multi-function hand shower.





Figure 1: GROHE Euphoria 310 CoolTouch Thermostatic Shower System, showcasing the rain shower head, hand shower, and thermostatic control in brushed nickel finish.

Key Features:

- **GROHE CoolTouch:** Ensures the thermostat body remains cool to the touch, preventing scalding.
- **GROHE TurboStat:** Maintains desired water temperature consistently, even with pressure fluctuations.
- **12-inch Rain Shower Head:** Features GROHE PureRain spray for a wide, soothing water flow.
- **3-Function Hand Shower:** Offers Rain, Massage, and SmartRain spray patterns for varied preferences.
- **Adjustable Shower Bar:** Allows for height adjustment of the hand shower.
- **Durable Construction:** Made with metal components and a Brushed Nickel Infinity Finish for longevity.

2. INSTALLATION AND SETUP

Installation of the GROHE Euphoria 310 CoolTouch Thermostatic Shower System should be performed by a

qualified professional in accordance with local plumbing and building codes. Ensure all necessary components are present before beginning installation.

Components Included:

- GROHE CoolTouch thermostatic control
- Shower head (12-inch Rainshower Mono 310)
- Shower arm
- Shower bar with hand-shower bracket
- Hand shower
- Metal hose

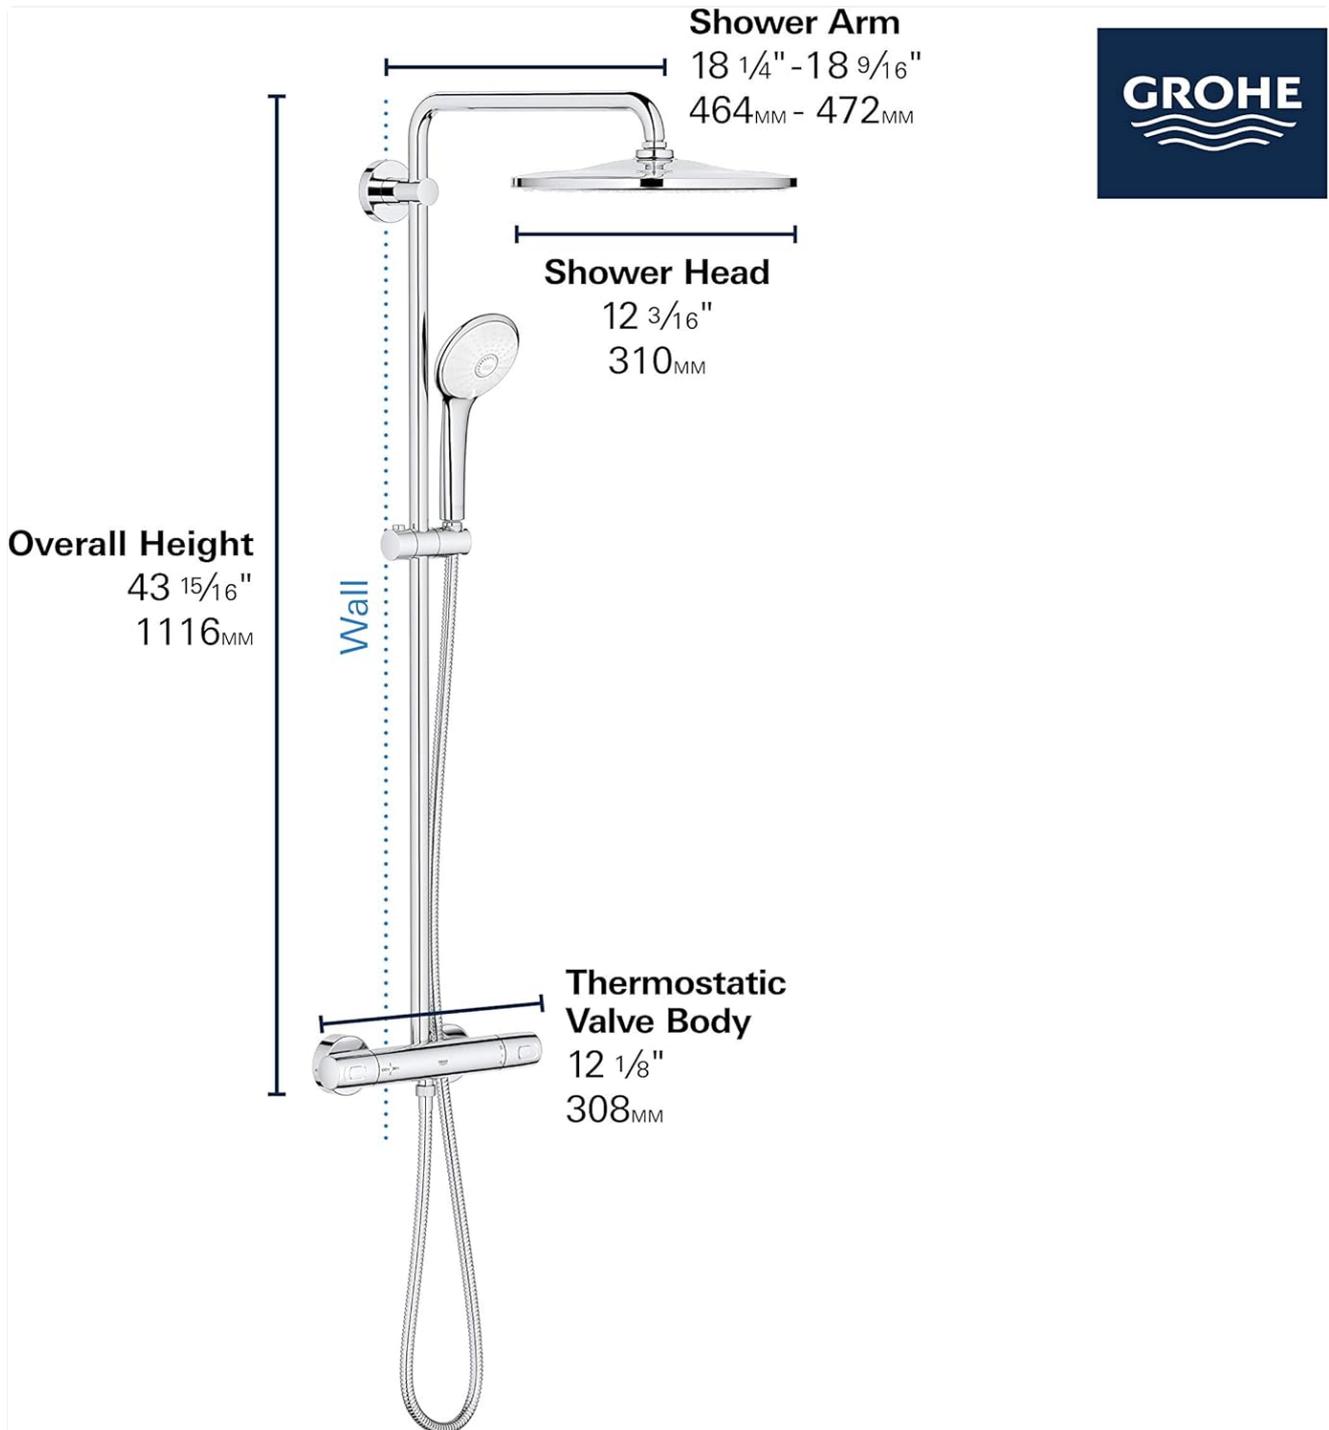


Figure 2: Dimensional drawing of the shower system, indicating overall height, shower arm length, shower head diameter, and thermostatic valve body width.

Installation Notes:

- This system is designed for surface-mounted installation and typically does not require a rough-in valve behind the wall.
- The FastFixation adjustable upper bracket simplifies installation.
- Ensure proper water supply connections (hot and cold) are correctly identified and connected to the thermostatic mixer.
- Securely mount the shower bar to the wall, ensuring it is level and capable of supporting the shower components.

3. OPERATING INSTRUCTIONS

The GROHE Euphoria 310 CoolTouch Thermostatic Shower System offers intuitive controls for a personalized showering experience.

Temperature Control:



Figure 3: Close-up view of the thermostatic control, highlighting the temperature dial and safety stop button.

- The right knob on the thermostatic mixer controls the water temperature.
- To increase temperature beyond 100°F (38°C), press and hold the safety stop button located on the knob while turning it. This prevents accidental scalding.
- The GROHE TurboStat technology ensures the water temperature remains constant throughout your shower.

Water Flow and Diverter:

- The left knob on the thermostatic mixer controls the water flow and acts as a diverter.
- Turn the knob to adjust the water volume.
- Push or pull the knob to switch water flow between the main rain shower head and the hand shower.

Hand Shower Operation:

- The hand shower offers three distinct spray patterns: Rain, Massage, and SmartRain.
- Rotate the spray face of the hand shower to cycle through the available spray patterns.
- The hand shower bracket can be adjusted up or down along the shower bar to suit individual height preferences.

Rain Shower Head Operation:

- The 12-inch Rainshower Mono 310 provides a wide, enveloping spray.
- Some models may feature an adjustable button in the center of the shower head to select different spray modes (e.g., 3-spray, 7-spray, 10-spray). Refer to your specific shower head's documentation for details.

4. MAINTENANCE

Regular cleaning and maintenance will ensure the longevity and optimal performance of your GROHE shower system.

Cleaning the Finish:

- Clean the Brushed Nickel Infinity Finish with a soft cloth and mild soap or a non-abrasive cleaner specifically designed for bathroom fixtures.
- Avoid using abrasive cleaners, scouring pads, or harsh chemicals, as these can damage the finish.
- Rinse thoroughly with clean water and dry with a soft cloth to prevent water spots.

Cleaning Shower Nozzles:

- The shower heads feature flexible silicone nozzles designed for easy cleaning.
- To remove limescale buildup, simply rub the nozzles with your finger or a soft cloth.
- For stubborn deposits, use a descaling solution safe for shower fixtures, following the product instructions carefully.



GROHE CoolTouch


Insulating sleeve separates the hot water flow from the housing of the thermostat

Surface temperature will never exceed the mixed water temperature

Metal housing will never become too hot to touch

GROHE

WITHOUT CoolTouch

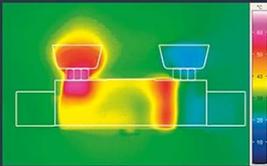

WITH CoolTouch



Figure 4: Visual representation of GROHE CoolTouch technology, showing how an insulating sleeve separates hot water flow from the thermostat housing to keep the surface cool.

5. TROUBLESHOOTING

If you encounter issues with your GROHE Euphoria 310 CoolTouch Thermostatic Shower System, refer to the following common troubleshooting steps.

Common Issues and Solutions:

Problem	Possible Cause	Solution
Inconsistent Water Temperature	Fluctuations in hot/cold water supply pressure; thermostatic cartridge issue.	Check household water pressure. Ensure hot and cold water supplies are balanced. If problem persists, contact a qualified plumber to inspect or replace the thermostatic cartridge.

Problem	Possible Cause	Solution
Low Water Pressure/Flow	Clogged shower nozzles; partially closed shut-off valves; low household water pressure.	Clean shower nozzles (refer to Maintenance section). Ensure main water supply valves are fully open. Consult a plumber to check household water pressure.
Water Leaks from Connections	Loose connections; damaged O-rings or seals.	Carefully check all connections for tightness. Do not overtighten. If leaks persist, turn off water supply and inspect O-rings and seals for damage. Replace if necessary. Contact a plumber if unsure.
Thermostat Body is Hot to Touch	GROHE CoolTouch not functioning as expected.	While GROHE CoolTouch is designed to prevent this, if the body becomes excessively hot, contact GROHE customer support or a qualified technician for inspection.

For issues not covered here, or if troubleshooting steps do not resolve the problem, please contact GROHE customer support or a certified plumbing professional.

6. SPECIFICATIONS

Feature	Detail
Brand	GROHE
Model Number	26726EN0
Finish Type	Brushed Nickel Infinity Finish
Material	Metal
Number of Handles	2
Mounting Type	Wall Mount
Shower Head Size	12 inches
Flow Rate	1.75 gallons per minute (gpm)
Included Components	Thermostatic control, shower head, shower arm, bar with hand-shower bracket, hand shower, metal hose

7. WARRANTY AND SUPPORT

GROHE products are manufactured to the highest standards to ensure durability and performance.

Warranty Information:

This product comes with a **LIMITED** manufacturer warranty. For specific terms, conditions, and duration of the warranty, please refer to the warranty card included with your product or visit the official GROHE website.

Customer Support:

For technical assistance, replacement parts, or warranty claims, please contact GROHE customer service. You can also find more information and support resources by visiting the [GROHE Store on Amazon](#) or the official GROHE website.