



SN30 Pro for Android — instruction manual

SN30 Pro for Android — 使用说明

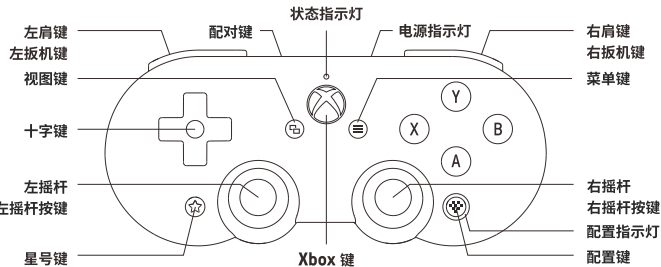

bluetooth connectivity

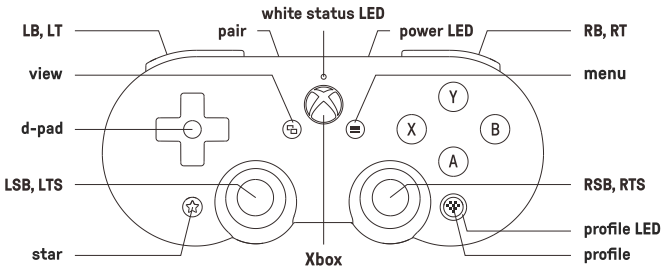

- 1 – press **Xbox** button to turn on the controller, white status LED starts to blink
- 2 – press **pair** button for 3 seconds to enter its pairing mode, white status LED starts to blink rapidly
- 3 – go to your Android device bluetooth setting, pair with [8BitDo SN30 Pro for Android]
- 4 – white status LED stays solid when connection is successful
- 5 – controller will auto reconnect to your Android device with the press of **Xbox** button once it has been paired

蓝牙连接



1. 轻按 [Xbox 键] 开机, 状态指示灯闪烁。
2. 按住 [配对键] 3 秒至状态指示灯快闪。
3. 打开 Android 设备蓝牙, 搜索 [8BitDo SN30 Pro for Android] 设备并点击连接。
4. 连接完成后, 状态指示灯呈常亮显示。
5. 成功配对后, 下次使用按 [Xbox 键] 可自动连接。

button swap



- 1 – press and hold any two of **A/B/X/Y/LB/RB/LSB/RSB** buttons you would like to swap
 - 2 – press the **star** button to swap them, profile LED blinks to indicate the success of the action
 - 3 – press and hold any of the two buttons which have been swapped and press the **star** button to cancel it
- button mapping goes back to its default mode when controller is turned off
 - please visit <https://support.8bitdo.com/> for further information and assistance

快速按键映射



1. 按住 A、B、X、Y、左肩键、右肩键、左摇杆按键、右摇杆按键任意两个按键, 并按下 [星号键] 即可快速交换按键功能。
 2. 按住任意切换过的按键, 再按下 [星号键] 可恢复默认功能。
 3. 设置过切换的按键, 按下时配置指示灯会闪烁。
- * 交换按键不会保存, 关机重启后恢复默认。

custom software




- 1 – button mapping, thumb stick sensitivity adjustment & trigger sensitivity alteration
 - 2 – press profile LED to activate/deactivate the customization, profile LED turns on to indicate the activation
- please visit <https://support.8bitdo.com/> on Windows to download the software

自定义配置




- * 请使用 PC 访问: <https://support.8bitdo.cn/> 下载精英软件使用, 可设置按键映射、摇杆灵敏度调节、扳机键调节。
- * 轻按 [配置键] 可开启 / 关闭自定义配置, 使用自定义配置时, 配置指示灯会亮起。

Analog Trigger to Digital Trigger

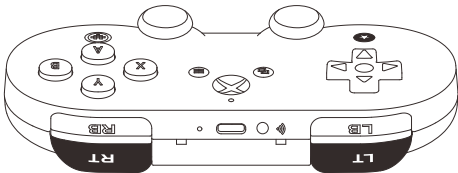

- 1 – Press and hold **LT + RT + star** button to shift trigger input to digital
 - 2 – Profile LED blinks when **LT/RT** are pressed to indicate they are on digital mode
 - 3 – Press and hold **LT + RT + star** button again to shift the trigger input back to analog, Profile LED ceases to blink
- trigger input goes back to its default mode - analog, when the controller is turned off

扳机键切换

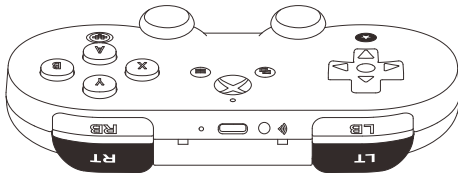

1. 同时按下 [LT + RT + 星号键] 切换 LT、RT 键为数字输出。
 2. 切换后的 LT、RT 键使用时右下角的配置指示灯 会持续闪烁, 表示按键已切换。
 3. 再次按下 [LT + RT + 星号键] 可恢复为模拟输出, 配置指示灯熄灭。
- * 切换扳机键不会保存, 关机重启后恢复默认。

battery



- | | | |
|-----------------------|---|------------------------|
| status – | | LED indicator – |
| low battery mode | → | red LED blinks |
| battery charging | → | green LED blinks |
| battery fully charged | → | green LED stays solid |

- built-in 480 mAh Li-ion with 16 hours of play time
- rechargeable via USB cable with 1 - 2 hour charging time
- sleep mode - 2 minute with no Bluetooth connection and 15 minutes with no use
- press Xbox button to wake up the controller
- controller stays on at all times on USB connection

电池



- | | | |
|-------------|---|----------------|
| 电量状态 | | 电源指示灯状态 |
| 低电量 | → | 红灯闪烁 |
| 充电中 | → | 绿灯闪烁 |
| 充电完成 | → | 绿灯常亮 |

- * 内置 480mAh 锂聚合物电池, 充电约 1 - 2 小时, 可持续使用约 16 小时。
- * 使用蓝牙连接时, 2 分钟内未连接蓝牙或连接后 15 分钟无操作时将自动关机。
- * 使用 USB 连接时, 手柄会保持开机。

support



- please visit support.8bitdo.com for further information & additional support

技术支持



- * 请访问 <https://support.8bitdo.cn/> 了解详细信息。