

Docking Station using ListenWIFI

Quick Start Guide

Introduction

Thank you for purchasing a docking station! **Please reference this guide to use ListenWIFI receivers with this product.** For ListenTALK products, please reference the Docking Station using ListenTALK Quick Start Guide.

The docking station allows for easy charging and management of ListenWIFI receivers. This guide provides an overview of the docking station and does not include all features or options. For complete details on care and use, please visit the ListenTech.com website to download the ListenWIFI system manual and supporting ListenWIFI Manager software.



www.listenwifi.com/support

Docking
Station 4
LA-482



Docking
Station 16
LA-480



Docking
Station Case 16
LA-481



Visit the ListenTech.com website to order accessories.

Setup and Charging

1. Place the docking station on a flat surface or counter where receivers are easily accessible. Alternatively, the docking station can be mounted to a wall or other surface using the wall mounting slots (LA-480 and LA-482).
2. Connect the docking station to a power outlet using the provided power supply.
3. Insert your ListenWIFI receivers into the charging pockets of the docking station. The receiver(s) top LED status will begin flashing to indicate the battery is charging and turn solid when fully charged.

Note: Do not close the docking station case when connected to power! The case must remain open to ensure proper ventilation while charging (LA-481).

ListenWIFI Manager

1. Download the ListenWIFI Manager software for Windows®, available on the ListenTech.com website on the ListenWIFI support page. The ListenWIFI Manager is required to initially set up and manage your entire ListenWIFI system, including the docking station and receivers.
2. Connect the docking station to a Windows computer using the provided USB cable.
3. Configure receivers in the Manager software, specifying Wi-Fi credentials, default audio language, beacon channel subscriptions, auto power, default volume, and other receiver settings. These settings can then be saved as a receiver profile, enabling the docking station to easily copy and share these profiles to additional devices using the cloning feature (see Cloning Button).

Note: For full software operation details, consult the software help files and system manual.

General Operation

i Status Button – Press the *status button* to illuminate the front graphical displays of the receivers. The amber *status indicator* will illuminate briefly, and all receivers in the docking station will display the following:

- Profile name
- Battery percentage
- Unit ID number

🔗 Cloning Button – Momentarily press the *cloning button* to copy the receiver's profile in the *red pocket* to all other receivers in the black pockets. The red *cloning indicator* flashes during the cloning operation and then turns solid for three seconds once complete.

The cloning operation copies all receiver profile settings, including Wi-Fi credentials, default audio language, beacon channel subscriptions, auto power, default volume, and other receiver settings.

View the current profiles at any time by pressing the status button.

Note: The ListenWIFI Manager software is required for the initial creation and assignment of a receiver profile, which must be done before a receiver clone operation (see ListenWIFI Manager section).

LA-382 Intelligent Cable Management Unit

A cable management unit is available for conveniently storing headphones, ear speakers, neck loops, and other accessories (available for LA-480 only).




User Checkout/Identification

The ListenWIFI Manager software has a checkout feature to facilitate easy checkout and check-in receivers. Navigate to the checkout tab, select a unit in the virtual dock, and capture any relevant information from the person using that receiver (i.e., name, ID number, phone number, picture, physical address, email address, etc.).

Alternatively, a personal identification card can be placed in a docking station pocket to help identify the person using that receiver.

Docking Station – Top and Bottom

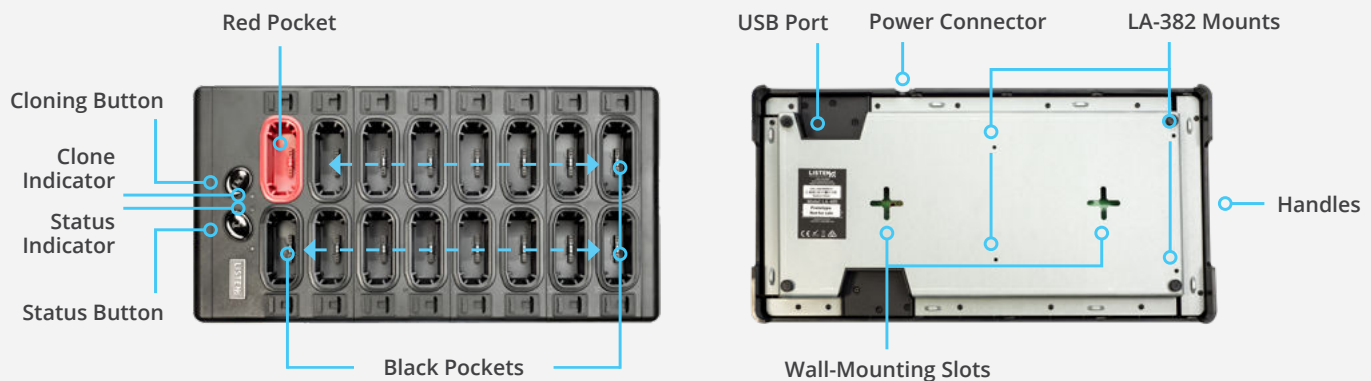

Note: mounting slots and handles are not accessible on Docking Station Case



LISTEN TECHNOLOGIES 14912 Heritage Crest Way, Bluffdale, Utah 84065-4818 USA
 Phone: +1.801.233.8992 Toll-Free: 1.800.330.0891 www.listentech.com

Windows® is a trademark of the Microsoft group of companies.
 Copyright © 1998 - 2023 Listen Technologies Corporation. All rights reserved. 20230807.