

# Cylindrical Photoelectric Sensors



## BRQ Series (front sensing type) PRODUCT MANUAL

**For your safety, read and follow the considerations written in the instruction manual, other manuals and Autonics website.**

The specifications, dimensions, etc. are subject to change without notice for product improvement. Some models may be discontinued without notice.

### Features

- Excellent noise immunity and minimal influence from ambient light
- Reverse power protection circuit, reverse output protection circuit, output short overcurrent protection circuit
- Mutual interference prevention function (except through-beam type)
- Sensitivity adjuster
- Light ON/Dark ON mode selectable by control wire
- Various materials : Plastic, Metal (Ni-plated Brass), SUS316L
- Long sensing distance : 30 m (through-beam type)
- Body size
  - BRQT, BRQM : Standard
  - BRQP : Standard, Short body
- Protection rating
  - BRQT : IP67 (IEC standard), IP69K (DIN standard)
  - BRQM, BRQP : IP67 (IEC standard)

### Safety Considerations

- Observe all 'Safety Considerations' for safe and proper operation to avoid hazards.
- ⚠ symbol indicates caution due to special circumstances in which hazards may occur.

**⚠ Warning** Failure to follow instructions may result in serious injury or death.

- 01. Fail-safe device must be installed when using the unit with machinery that may cause serious injury or substantial economic loss. (e.g., nuclear power control, medical equipment, ships, vehicles, railways, aircraft, combustion apparatus, safety equipment, crime/disaster prevention devices, etc.)**  
Failure to follow this instruction may result in personal injury, economic loss or fire.
- 02. Do not use the unit in the place where flammable/explosive/corrosive gas, high humidity, direct sunlight, radiant heat, vibration, impact or salinity may be present.**  
Failure to follow this instruction may result in explosion or fire.
- 03. Do not disassemble or modify the unit.**  
Failure to follow this instruction may result in fire.
- 04. Do not connect, repair, or inspect the unit while connected to a power source.**  
Failure to follow this instruction may result in fire.
- 05. Check 'Connections' before wiring.**  
Failure to follow this instruction may result in fire.

**⚠ Caution** Failure to follow instructions may result in injury or product damage.

- 01. Use the unit within the rated specifications.**  
Failure to follow this instruction may result in fire or product damage.
- 02. Use a dry cloth to clean the unit, and do not use water or organic solvent.**  
Failure to follow this instruction may result in fire.

### Cautions during Use

- Follow instructions in 'Cautions during Use'. Otherwise, It may cause unexpected accidents.
- When connecting an inductive load such as DC relay or solenoid valve to the output, remove surge by using diodes or varistors.
- Use the product after 0.5 sec of the power input.  
When using a separate power supply for the sensor and load, supply power to the sensor first.
- 10-30 VDC power supply should be insulated and limited voltage/current or Class 2, SELV power supply device.
- Wire as short as possible and keep it away from high voltage lines or power lines to prevent surge and inductive noise.
- When using switching mode power supply (SMPS), ground F.G. terminal and connect a condenser between 0V and F.G. terminal to remove noise.
- When using a sensor with a noise-generating equipment (e.g., switching regulator, inverter, and servo motor), ground F.G. terminal of the equipment.
- This unit may be used in the following environments.
  - Indoors (in the environment condition rated in 'Specifications')
  - Altitude max. 2,000 m
  - Pollution degree 3
  - Installation category II

### Product Components

| Sensing type           | Through-beam                | Polarized retroreflective | Diffuse reflective |
|------------------------|-----------------------------|---------------------------|--------------------|
| Product components     | Product, instruction manual |                           |                    |
| Reflector              | -                           | MS-2A                     | -                  |
| Adjustment screwdriver | × 1                         | × 1                       | × 1                |
| M18 fixing nut         | × 4                         | × 2                       | × 2                |

## Ordering Information

This is only for reference, the actual product does not support all combinations.  
For selecting the specified model, follow the Autonics website.

**BRQ ① ② - ③ D T ④ - ⑤ - ⑥**

### ① Material

T: SUS316L  
M: Brass, Ni-plate  
P: Plastic

### ② Sensing distance

Number: Sensing distance (unit: mm)  
Number+M: Sensing distance (unit: m)

### ③ Sensing type

T: Through-beam  
P: Polarized retroreflective  
D: Diffuse reflective

### ④ Appearance

A: Standard  
B: Short body (plastic material model)

### ⑤ Connection

No mark: Cable type  
C: Connector type

### ⑥ Control output

No mark: NPN open collector output  
P: PNP open collector output

## Sold Separately

- Reflector: MS Series
- Bracket: BK-BR-A
- Retroreflective tape: MST Series
- Connector cable, connector connection cable
- Fixing cap for plastic short body: BK-BR-B


## Cautions during Installation

- Be sure to install this product by following the usage environment, location, and specified ratings. Consider the listed conditions below.
  - Installation environment and background (reflected light)
  - Sensing distance and sensing target
  - Direction of target's movement
  - Feature data
- When installing multiple sensors closely, it may result in malfunction due to mutual interference.
- For installation, tighten the screw with a torque of 14.7 N m (SUS316L, Brass, Ni-plate material model), 0.39 N m (plastic material model). Mount the brackets correctly to prevent the twisting of the sensor's optical axis.
- Do not impact with a hard object or bend the cable excessively. That could decrease the product's water resistance.
- Use this product after the test. Check whether the indicator works appropriately for the positions of the detectable object.

| Through-beam                                      | Retroreflective                                                                                                               | Reflective                                                                                                |
|---------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
|                                                   |                                                                                                                               |                                                                                                           |
| Emitter - Receiver:<br>Install to face each other | Sensor - Reflector:<br>At least 0.1 m apart,<br>install to face each other<br>(parallel with the sensing<br>side of the unit) | Sensor - Sensing target:<br>Install to face each other<br>(parallel with the sensing<br>side of the unit) |

## Operation Timing Chart


### ■ Light ON mode

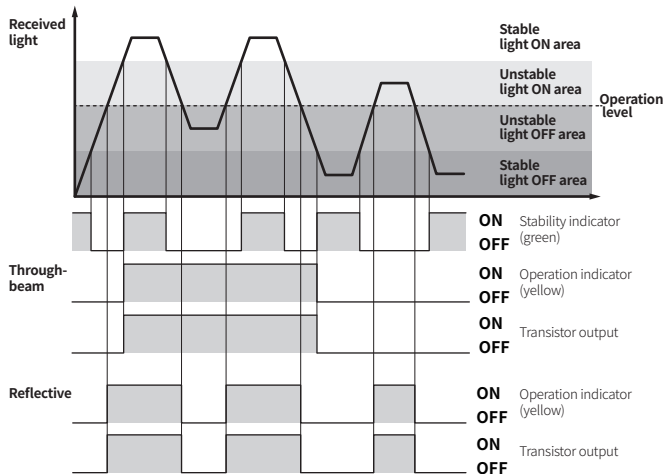


- In Dark ON mode, the waveforms are reversed.
- Operation indicator and transistor output differ from the sensing method.

## Connections


### ■ Cable type: Emitter



### ■ Cable type: Receiver, Polarized retroreflective, Diffuse reflective type

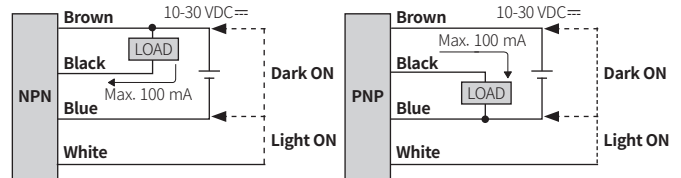

### ■ Connector type



| Pin | Color | Function |
|-----|-------|----------|
| ①   | Brown | +V       |
| ②   | White | CONTROL  |
| ③   | Blue  | 0 V      |
| ④   | Black | OUT      |

- Connector pin ②, ④ are N.C (not connected) terminal for the emitter.


### ■ Operation mode selection

- Be sure to connect the control wire when selecting the operation mode. Failure to this instruction may result in product damage.


| Operation mode | Wiring                                         |
|----------------|------------------------------------------------|
| Dark ON        | Connect the control wire (white) to +V (brown) |
| Light ON       | Connect the control wire (white) to 0 V (Blue) |

## Circuit

### ■ NPN open collector output



### ■ PNP open collector output



- OCP (over current protection), SCP (short circuit protection)
- If short-circuit the control output terminal or supply current over the rated specification, normal control signal is not output due to the protection circuit.

## Sensitivity Adjustment

- Set the adjuster for stable Light ON area, minimizing the effect of the installation environment.
- Use the offered adjustment screwdriver. Do NOT turn with excessive force to prevent product damage.
- The steps below are based on Light ON mode.


| STEP | Status      | Description                                                                                                                                                                                                              |
|------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 01   | Received    | Turn the adjuster from MIN to MAX sensitivity and check the position (A) where the operation indicator activates under the light ON area.                                                                                |
| 02   | Interrupted | Turn the adjuster from (A) to MAX and check the position (B) where the operation indicator activates under the light OFF area. If the operation indicator does NOT activate at the MAX (maximum sensitivity): MAX = (B). |
| 03   | -           | Set the adjuster at the mid position between (A) and (B) for optimal sensitivity.                                                                                                                                        |

## Dimensions

- Unit: mm, For the detailed drawings, follow the Autonics website.
- This dimensions shows the cable type. Refer to the 'Specifications' for the core, wiring, and connector.

|   |                              |   |                                  |
|---|------------------------------|---|----------------------------------|
| A | Optical axis of emitter      | D | Stability indicator (green)      |
| B | Optical axis of receiver     | E | Power indicator of emitter (red) |
| C | Operation indicator (yellow) | F | Sensitivity adjuster             |

### ■ SUS316L, Ni-plate, Brass material model

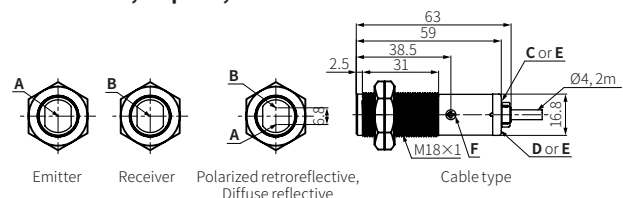


Emitter Receiver Polarized retroreflective, Diffuse reflective Cable type


2.3 31 16.8 Ø4,2m M18x1 F D or E

• Plastic material model

- Unit: mm, For the detailed drawings, follow the Autonics website.



- Only for the plastic material short body model



| Model                          | BRQ□□-TDT□-□-□                                                                                  | BRQ□3M-PDT□-□-□                                                                             | BRQ□□-DDT□-□-□                                                                              |
|--------------------------------|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| Sensing type                   | Through-beam                                                                                    | Polarized retroreflective                                                                   | Diffuse reflective                                                                          |
| Sensing distance               | 5 m    20 m    30 m                                                                             | 3 m <sup>(a)</sup>                                                                          | 100 mm <sup>(a)</sup> 400 mm <sup>(a)</sup> 1 m <sup>(a)</sup>                              |
| Sensing target                 | Opaque materials                                                                                | Opaque materials                                                                            | Opaque, translucent materials                                                               |
| Min. sensing target            | ≥ Ø 7 mm                                                                                        | ≥ Ø 75 mm                                                                                   | -                                                                                           |
| Hysteresis                     | -                                                                                               | -                                                                                           | ≤ 20 % of sensing distance                                                                  |
| Response time                  | ≤ 1 ms                                                                                          | -                                                                                           | -                                                                                           |
| Light source                   | Red                                                                                             | Red                                                                                         | Infrared    Red    Red                                                                      |
| Peak emission wavelength       | 660 nm                                                                                          | 660 nm                                                                                      | 850 nm    660 nm    660 nm                                                                  |
| Sensitivity adjustment         | YES (Adjuster)                                                                                  | YES (Adjuster)                                                                              | YES (Adjuster)                                                                              |
| Mutual interference prevention | -                                                                                               | YES                                                                                         | YES                                                                                         |
| Operation mode                 | Light ON mode - Dark ON mode selectable (Control wire)                                          |                                                                                             |                                                                                             |
| Indicator                      | Operation indicator (yellow), stability indicator (green), power indicator (red) <sup>(a)</sup> |                                                                                             |                                                                                             |
| Approval                       | CE  ENEC     | CE  ENEC | CE  ENEC |


04) Only for the emitter

| Unit weight (packaged) | Material        | Through-beam      | Polarized retroreflective,<br>Diffuse reflective |
|------------------------|-----------------|-------------------|--------------------------------------------------|
| Cable type             | SUS316L         | ≈ 140 g (≈ 220 g) | ≈ 70 g (≈ 150 g)                                 |
|                        | Brass, Ni-plate | ≈ 140 g (≈ 220 g) | ≈ 70 g (≈ 150 g)                                 |
|                        | Plastic         | ≈ 110 g (≈ 160 g) | ≈ 60 g (≈ 120 g)                                 |
|                        | Plastic (short) | ≈ 100 g (≈ 150 g) | ≈ 50 g (≈ 120 g)                                 |
| Connector type         | SUS316L         | ≈ 50 g (≈ 160 g)  | ≈ 30 g (≈ 140 g)                                 |
|                        | Brass, Ni-plate | ≈ 50 g (≈ 160 g)  | ≈ 30 g (≈ 140 g)                                 |
|                        | Plastic         | ≈ 25 g (≈ 110 g)  | ≈ 15 g (≈ 110 g)                                 |
|                        | Plastic (short) | ≈ 20 g (≈ 100 g)  | ≈ 10 g (≈ 100 g)                                 |


|                                       |                                                                                                       |
|---------------------------------------|-------------------------------------------------------------------------------------------------------|
| <b>Power supply</b>                   | 10-30 VDC= $\pm 10\%$ (ripple P-P: $\leq 10\%$ )                                                      |
| <b>Current consumption</b>            | It depends on the sensing type                                                                        |
| Through-beam                          | Emitter: $\leq 20$ mA, receiver: $\leq 20$ mA                                                         |
| Reflective                            | $\leq 30$ mA                                                                                          |
| <b>Control output</b>                 | NPN open collector output / PNP open collector output model                                           |
| Load voltage                          | $\leq 30$ VDC=                                                                                        |
| Load current                          | $\leq 100$ mA                                                                                         |
| Residual voltage                      | NPN: $\leq 2$ VDC=, PNP: $\leq 2$ VDC=                                                                |
| <b>Protection circuit</b>             | Reverse power/output protection circuit, output short overcurrent protection circuit                  |
| <b>Insulation resistance</b>          | $\geq 20$ M $\Omega$ (500 VDC= megger)                                                                |
| <b>Noise immunity</b>                 | $\pm 240$ VDC= the square wave noise (pulse width: 1 $\mu$ s) by the noise simulator                  |
| <b>Dielectric strength</b>            | 1,000 VAC $\sim$ 50/60 Hz for 1 min                                                                   |
| <b>Vibration</b>                      | 1.5 mm double amplitude at frequency of 10 to 55 Hz (for 1 min) in each X, Y, Z direction for 2 hours |
| <b>Shock</b>                          | 500 m/s <sup>2</sup> ( $\approx 50$ G) in each X, Y, Z direction for 3 times                          |
| <b>Ambient illuminance (receiver)</b> | Sunlight: $\leq 11,000$ lx, incandescent lamp: $\leq 3,000$ lx                                        |
| <b>Ambient temperature</b>            | -25 to 60 °C, storage: -30 to 70 °C (no freezing or condensation)                                     |
| <b>Ambient humidity</b>               | 35 to 85 %RH, storage: 35 to 85 %RH (no freezing or condensation)                                     |
| <b>Protection rating</b>              | IP67 (IEC standard)<br>SUS316L material model: IP67 (IEC standard), IP69K (DIN standard)              |
| <b>Connection</b>                     | Cable type / Connector type model                                                                     |
| <b>Cable spec.</b>                    | $\varnothing 4$ mm, 4-wire, (Emitter: 2-wire), 2 m                                                    |
| <b>Wire spec.</b>                     | AWG26 (0.52 mm, 20-core), insulator outer diameter: $\varnothing 1$ mm                                |
| <b>Connector</b>                      | M12 4-pin plug type                                                                                   |
| <b>Material</b>                       | Case: It depends on the model. (refer to 'Ordering Information'),<br>lens and lens cover: PMMA        |

## Feature Data: Through-beam Type


### Sensing area




• BRQT5M-TDTA




• BRQT20M-TDTA-C




• BRQT30M-TDTA-P




• BRQP5M-TDTA




• BRQP5M-TDTB




• BRQP20M-TDTA-C-P




• BRQP20M-TDTB




• BRQP30M-TDTA-C




• BRQP30M-TDTB




### Emitter angle




• BRQT20M-TDTA-C




• BRQT5M-TDTA




• BRQT30M-TDTA-P




• BRQP5M-TDTA




• BRQP5M-TDTB




• BRQP20M-TDTA-C-P




• BRQP20M-TDTB



• BRQP30M-TDTA-C




• BRQP30M-TDTB




## Feature Data : Polarized Retroreflective Type


### ■ Sensing area




• BRQT3M-PDTA-C-P




• BRQP3M-PDTA-P




• BRQP3M-PDTB




### ■ Sensor angle




• BRQT3M-PDTA-C-P




• BRQP3M-PDTA-P




• BRQP3M-PDTB




### ■ Reflector angle




• BRQT3M-PDTA-C-P



• BRQP3M-PDTA-P




• BRQP3M-PDTB




## Feature Data: Diffuse Reflective Type


### ■ Sensing area




• BRQT100-DDTA




• BRQT400-DDTA-C




• BRQT1M-DDTA-P




• BRQP100-DDTA-C-P




• BRQP100-DDTB




• BRQP400-DDTA



• BRQP400-DDTB



• BRQP1M-DDTA-C



• BRQP1M-DDTB

