



# K600S-B100W


# MECHANICAL

# KEYBOARD

USER MANUAL

使用本产品前请仔细阅读指导手册，妥善保存以备参考。  
Please read the instructions carefully before  
using this product and keep it well for referen.

DEVICE LAYOUT

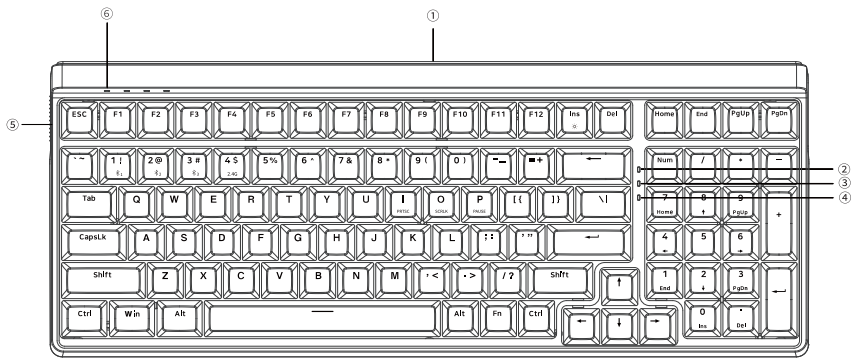

- ① USB TYPE-C PORT
- ② NUM LOCK INDICATOR
- ③ CAPS LOCK INDICATOR
- ④ POWER INDICATOR
- ⑤ CONNECTION MODE SWITCH
- ⑥ BATTERY INDICATOR

TECH SPECS

Product Model	MACHENIKE K600S-B100W TRI-MODE
Connectivity	Type-C / Bluetooth / 2.4Ghz
Layout	100Keys / 96% Compact Full Sized
Anti-Ghosting Keys	N-Key Rollover
Battery	3000mAh
Dimension	L378*W147.4*H39.8mm
Net Weight	1027g±30g
Cable Length	Approx.1.5m / 4.92ft
Execution Standards	GB/T 14081-2010

GETTING TO KNOW YOUR KEYBOARD

- 1. CONNECTING VIA US**

  - Ⓐ Toggle the Mode Switch to Cable mode
  - Ⓑ Connect the keyboard via USB cable to the device' s USB port.
- 2. CONNECTING VIA 2.4GHz**

  - Ⓐ Toggle the Mode Switch to 2.4G mode
  - Ⓑ Hold Fn+4 for 3 seconds till the light flashes fast in yellow, the keyboard is ready to pair
  - Ⓒ Insert the 2.4G dongle to your device, the 4 key stops flashing turns to solid yellow and the connection is done.
- 3. CONNECTING VIA BLUETOOTH**

  - Ⓐ Toggle the Mode Switch to BT mode
  - Ⓑ Hold Fn+1/2/3 for 3 seconds till the indicators flashes fast in blue/green/pink, the keyboard is ready to pair.
  - Ⓒ Turn on your Bluetooth device and find "K600S-B100W 3.0 " or "K600S-B100W 5.0", then connect. When the keyboard is connected to the Bluetooth device, the indictor turns solid.
  - Ⓓ Press Fn+1/2/3 to toggle between the Bluetooth devices 1/2/3.
- 4. LIGHTING**

  - Ⓐ FN+Ins : Press to switch the cycle 20 lighting effects
  - Ⓑ FN+ENTER : Press to switch the cycle 8 lighting effects colors.( The light color can only be modified under the specified light effect.)
  - Ⓒ FN+ ↑ / ↓ : Backlights Brightness +/- , When set to the limit, NUM, CAP 2 lights flash 3 times, 5 levels adjustable.
  - Ⓓ FN+← / →: Effect Speed - / +, When set to the limit, NUM, CAP 2 lights flash 3 times, 5 levels adjustable.
- 5. RECORD CUSTOM LIGHTING EFFECTS**

  - Ⓐ Press FN+BACKSPACE to enter the record state , and press FN+BACKSPACE again to start to record.
  - Ⓑ Select the key and press to choose the backlight color you want.
  - Ⓒ After finishing recording , press FN+BACKSPACE to save the effects.
- 6. LOW POWER/CHARGING INDICATION**

  - Ⓐ Battery voltage < 3.3V : Light effect automatically off, there is a key action when the power indicator slow flashing red light.
  - Ⓑ Battery voltage ≤ 3.0V : Keyboard auto shut-off.
  - Ⓒ Charging : The power indicator light is always on in red, and the four power indicators in the upper left corner keep flashing in order. Each power indicator represents 25% of the electricity power
- 7. POWER SAVING MODE**

Keyboard in no operation 1 minute after the backlight off into the standby state, not operated 30 minutes into the Sleep state.
- 8. RESET**

FN+ESC : Press and hold 3 seconds, Restore the lighting effect to factory settings, clear all macro settings and paired devices.

WINDOWS SHORTCUTS

SHORTCUTS	FUNCTIONS	SHORTCUTS	FUNCTIONS
FN+F1	Brightness-	FN+F2	Brightness +
FN+F3	Mail	FN+F4	Calculator
FN+F5	My Computer	FN+F6	Player
FN+F7	Previous Track	FN+F8	Play/Pause
FN+F9	Next Track	FN+F10	Mute
FN+F11	Volume -	FN+F12	Volume +
FN+I	PrtSc	FN+O	ScrLK
FN+P	Pause	FN+WIN	Lock the Win key
FN+A	Switch to Mac OS	FN+W	Switch to WINDOWS

PACKING INCLUDE

User manual \*1, Certificate of conformity \*1, Type-C \*1, Switch puller \*1, keycap puller \*1, additional switches \*2