

## ELEGANT TD3-4858-Q

# ELEGANT TD3-4858-Q Frameless Bathtub Shower Door Instruction Manual

Model: TD3-4858-Q | Dimensions: 48" W x 58" H | Glass Thickness: 1/4" (6mm)

### 1. INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your ELEGANT TD3-4858-Q Frameless Bathtub Shower Door. Please read all instructions carefully before beginning installation and retain this manual for future reference. This product features a hinged pivot design, 1/4" (6mm) clear tempered glass, and a chrome finish.



Image 1.1: ELEGANT Frameless Bathtub Shower Door (Model TD3-4858-Q).

## 2. SAFETY INFORMATION

---

- **Professional Installation Recommended:** Due to the weight and fragility of glass, professional installation is strongly recommended.
- **Tempered Glass:** The shower door is constructed from 1/4" (6mm) ANSI Z97.1 certified clear tempered glass. While highly durable, tempered glass can shatter into small, blunt pieces if impacted forcefully at the edges. Handle with extreme care.
- **Heavy Product:** The glass panels are heavy. Always use appropriate lifting techniques and have at least two people for handling and installation.
- **Secure Mounting:** Ensure the wall structure is capable of supporting the weight of the shower door. Use appropriate fasteners for your wall type.
- **Protective Gear:** Wear safety glasses, gloves, and appropriate footwear during installation.

# 6MM CLEAR TEMPERED GLASS

Certified by ANSI Z97.1

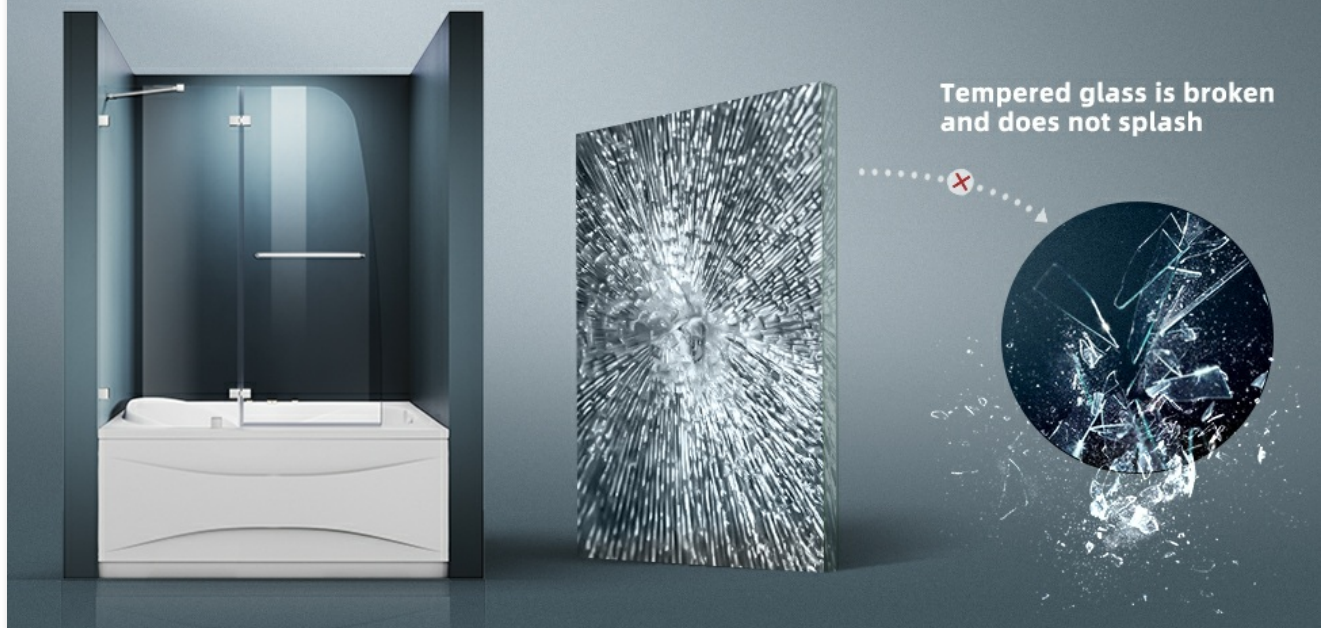


Image 2.1: Illustration of 6mm clear tempered glass safety features.

## 3. PACKAGE CONTENTS

Verify that all components are present and undamaged before beginning installation. If any parts are missing or damaged, contact ELEGANT customer support.

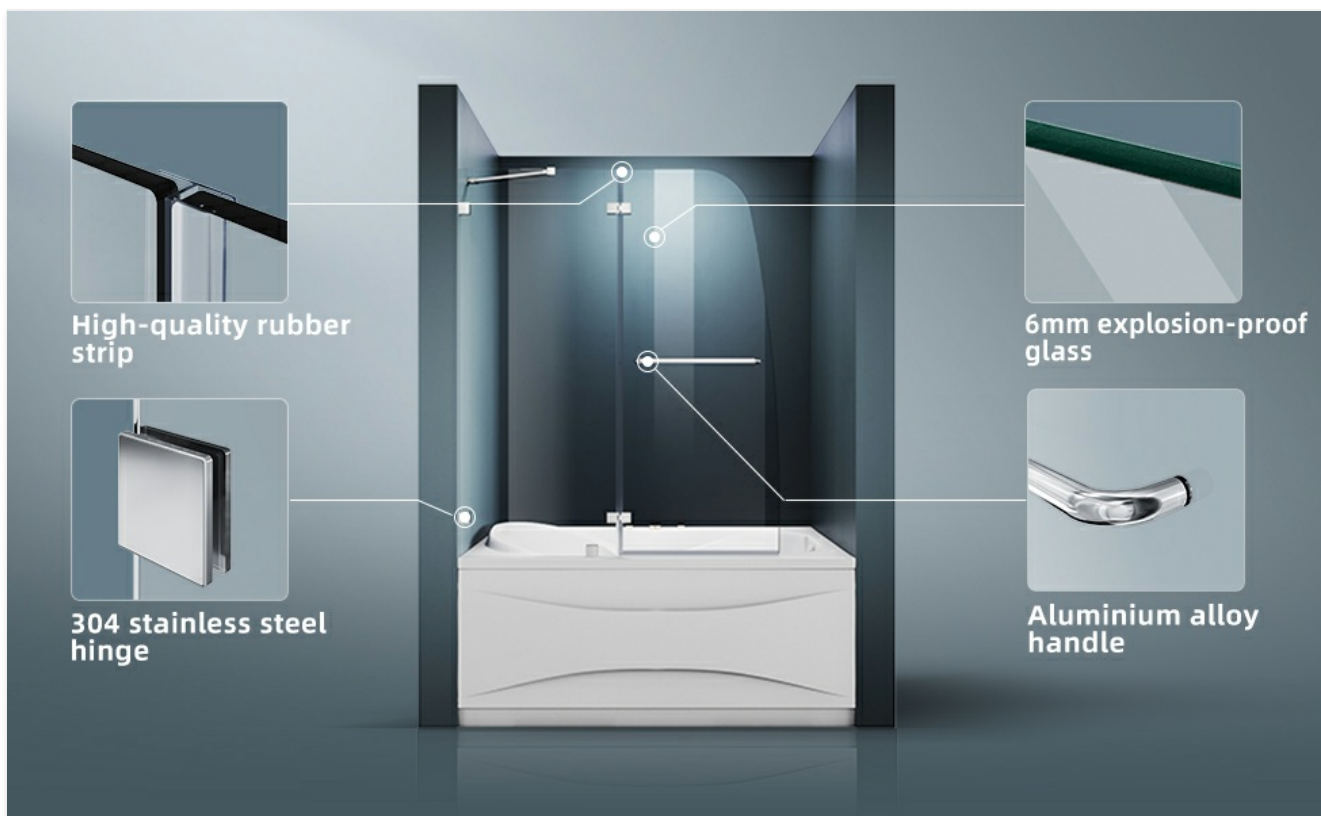


Image 3.1: Exploded view of shower door components.

- Glass Panels (2) - 1/4" (6mm) Clear Tempered Glass

- Hinge Clamps (Stainless Steel)
- Support Bar (Stainless Steel)
- Handle (Aluminum Alloy)
- Wall Mount Brackets
- Bottom Seal Strip
- Mounting Hardware (Screws, Anchors)
- Installation Manual

## 4. SETUP AND INSTALLATION

---

This section outlines the general steps for installing the ELEGANT TD3-4858-Q shower door. Due to the complexity and precision required, professional installation is highly recommended.

### 4.1 Tools Required

- Measuring Tape
- Level
- Drill
- Drill Bits (appropriate for wall material)
- Screwdriver (Phillips head)
- Pencil
- Caulking Gun and Silicone Sealant (mildew-resistant)
- Safety Glasses and Gloves

### 4.2 Pre-Installation Steps

1. **Inspect Components:** Unpack all parts and inspect for any damage. Report any issues immediately.
2. **Measure and Verify:** Confirm that your bathtub and wall dimensions are compatible with the 48" W x 58" H shower door.
3. **Prepare Installation Area:** Ensure the wall surface is clean, dry, and structurally sound.
4. **Determine Door Orientation:** The hinged tub door can be installed for right or left-hand opening. Decide your preferred orientation.

### 4.3 Installation Procedure

1. **Mark Wall Positions:** Using a level and measuring tape, mark the precise locations for the wall mount brackets on your bathroom wall.
2. **Drill Pilot Holes:** Drill pilot holes at the marked locations. Ensure the depth is appropriate for the anchors.
3. **Install Wall Brackets:** Secure the wall mount brackets using the provided screws and anchors. Ensure they are firmly attached and level.
4. **Mount Fixed Glass Panel:** Carefully lift and position the fixed glass panel into the wall brackets. Secure it according to the specific hardware design.
5. **Attach Hinges:** Connect the hinge clamps to the fixed glass panel and the pivot glass panel. Ensure proper alignment for smooth operation.



## QUALITY HINGE CLAMPS


- Long service life, safe and stable
- Effortless to rotate



Image 4.1: Detail of the hinge clamps for glass panel connection.

6. **Install Support Bar:** Attach the stainless steel support bar between the fixed glass panel and the wall. This enhances stability and prevents shaking.



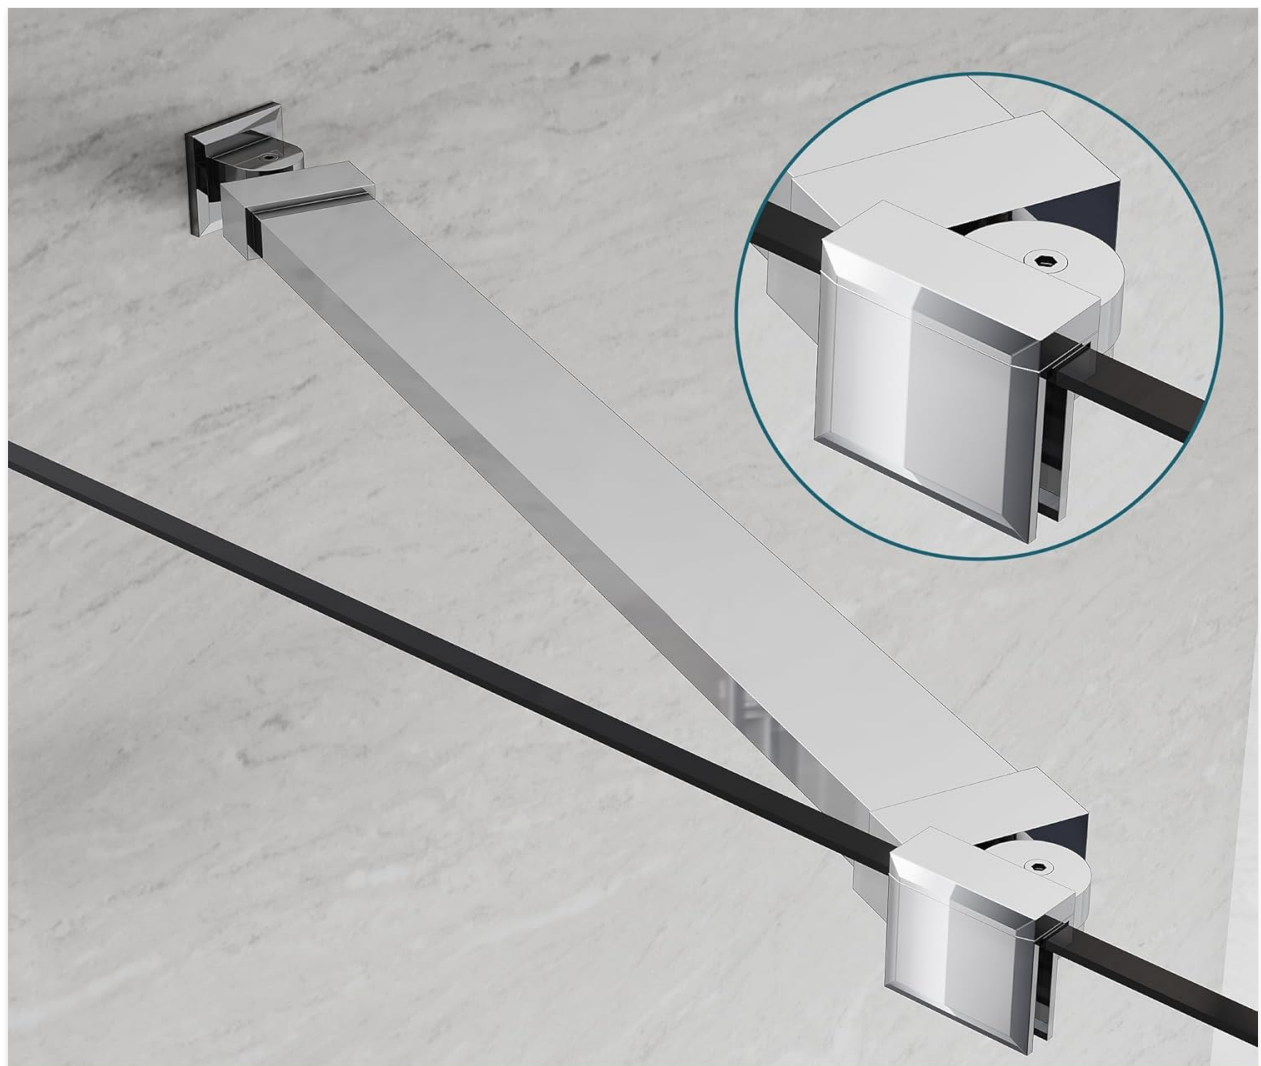

# STAINLESS STEEL SUPPORT BAR

·Increasing security and protection

Image 4.2: Stainless steel support bar for enhanced stability.

7. **Attach Handle:** Secure the aluminum alloy handle to the pivot glass panel.



Image 4.3: Aluminum alloy handle for easy opening and closing.

8. **Apply Bottom Seal Strip:** Install the bottom seal strip along the lower edge of the glass panels to prevent water leakage.

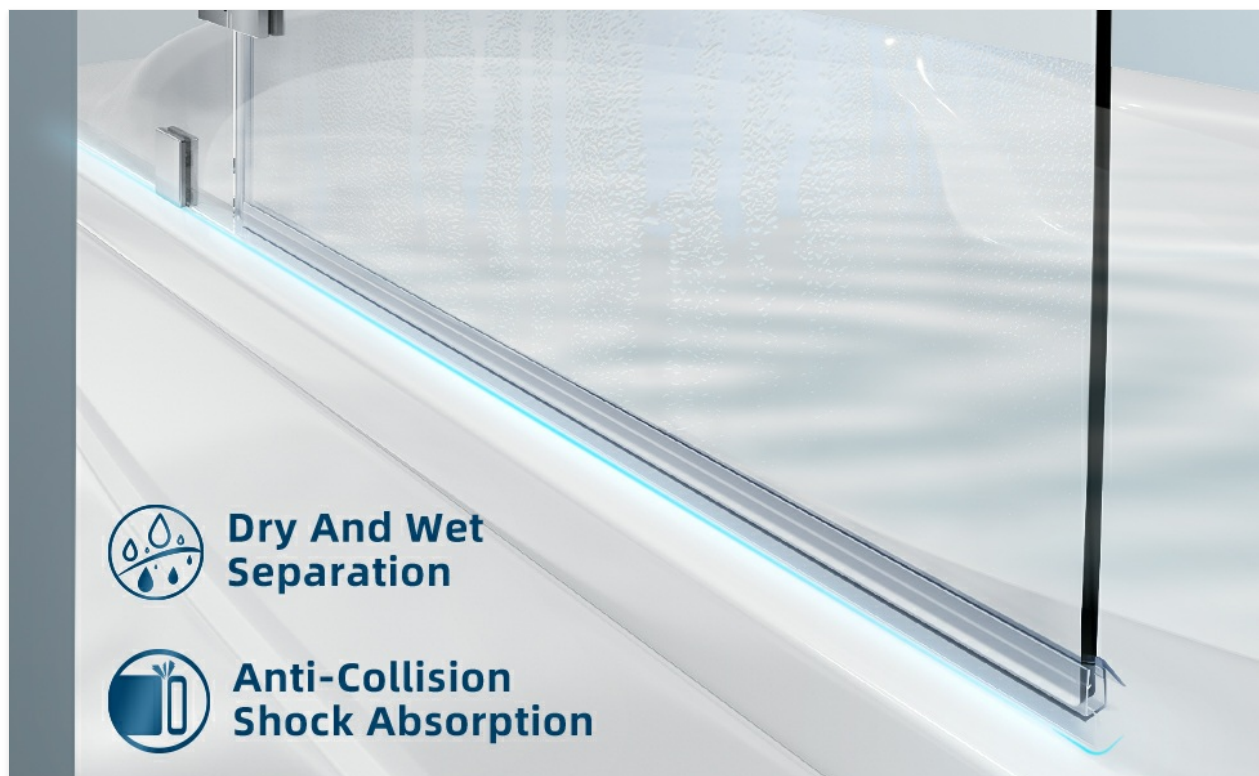


Image 4.4: Waterproof design with bottom seal strip.

9. **Seal Edges:** Apply a bead of mildew-resistant silicone sealant along all exterior seams where the shower door meets the wall and bathtub. Allow adequate curing time before use.

## 5. OPERATION

The ELEGANT TD3-4858-Q shower door is designed for smooth and convenient operation.

- **Opening and Closing:** Use the aluminum alloy handle to gently open and close the pivot door. Avoid forceful movements.
- **180-Degree Rotation:** The hinged pivot design allows the door to rotate outwards up to 180 degrees, providing a wide walk-in entrance.



Image 5.1: The door's 180-degree outward rotation capability.

- **Anti-Collision Design:** The door incorporates an anti-collision design for silent and smooth movement, preventing direct glass-to-glass or glass-to-wall impact during normal use.





Image 5.2: Anti-collision design for quiet and safe operation.

## 6. MAINTENANCE

---

Regular cleaning and maintenance will ensure the longevity and appearance of your shower door.

- **Glass Cleaning:** Clean glass panels regularly with a soft cloth and a non-abrasive glass cleaner. Avoid harsh chemicals or abrasive pads that can scratch the glass or damage protective coatings.
- **Hardware Cleaning:** Wipe down chrome finish hardware with a soft, damp cloth. For stubborn spots, use a mild, non-abrasive cleaner specifically designed for chrome. Dry thoroughly to prevent water spots.
- **Seal Maintenance:** Periodically check the bottom seal strip and silicone sealant for wear or mildew. Replace seals or reapply sealant as needed to maintain water tightness.
- **Hinge Inspection:** Inspect hinges periodically for any signs of loosening or wear. Tighten screws if necessary, but do not overtighten.

## 7. TROUBLESHOOTING

---

Refer to this section for common issues and their solutions.

Problem	Possible Cause	Solution
Door does not close smoothly or is stiff.	Misaligned hinges; debris in hinge mechanism; loose screws.	Check hinge alignment and adjust if necessary. Clean hinges. Tighten hinge screws.
Water leakage from bottom or sides.	Damaged or improperly installed bottom seal strip; worn silicone sealant; gaps in installation.	Inspect and replace bottom seal strip if damaged. Reapply silicone sealant where needed. Ensure all connections are tight.
Glass appears cloudy or stained.	Hard water deposits; improper cleaning agents.	Use a specialized glass cleaner for hard water stains. Avoid abrasive cleaners. Regular cleaning prevents buildup.

## 8. SPECIFICATIONS

---

- **Brand:** ELEGANT
- **Model Number:** TD3-4858-Q
- **Product Dimensions:** 0.25"D x 48"W x 58"H (Glass thickness x Width x Height)
- **Glass Type:** 1/4" (6mm) Clear Tempered Glass (ANSI Z97.1 Certified)
- **Finish:** Chrome
- **Material:** Stainless Steel (Hinges), Aluminum Alloy (Handle)
- **Installation Type:** Screw-In
- **Number of Doors:** 1 (Pivot)
- **Number of Panels:** 2 (One fixed, one pivot)
- **Item Weight:** Approximately 65 Pounds
- **Assembly Required:** Yes






## 9. WARRANTY AND SUPPORT

---

For warranty information or technical support, please contact ELEGANT customer service. Keep your purchase receipt and model number (TD3-4858-Q) readily available when contacting support.

**ELEGANT Customer Service:** Refer to your product packaging or the ELEGANT official website for contact details.
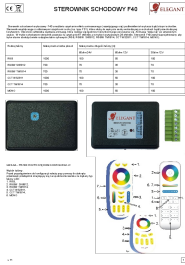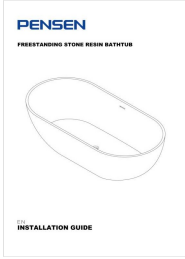
### Related Documents - TD3-4858-Q

	<p><a href="#">Sterownik Schodowy F40 - Instrukcja Obsługi i Konfiguracji</a></p> <p>Szczegółowa instrukcja obsługi i konfiguracji sterownika schodowo-korytarzowego F40 firmy ELEGANT, przeznaczonego do sterowania taśmami LED RGB, RGBW i CCT, wraz ze schematami połączeń.</p>
	<p><a href="#">Empava EE-59FT1518 Free-Standing Bathtub Installation Manual</a></p> <p>Detailed installation instructions, cleaning advice, and safety precautions for the Empava EE-59FT1518 free-standing bathtub. This guide helps ensure proper setup and maintenance for your elegant, modern bathtub.</p>
	<p><a href="#">Pensen Freestanding Stone Resin Bathtub Installation Guide</a></p> <p>Comprehensive installation guide for the Pensen Freestanding Stone Resin Bathtub. This document provides detailed instructions for installing your elegant oval stand-alone soaking tub on wooden or concrete floors, including product kit contents, pre-installation checks, and essential care instructions for maintaining its flawless matte white finish.</p>
	<p><a href="#">Woodcraft Elegant Beauty Rollerball &amp; Fountain Pen Kits Assembly Instructions</a></p> <p>A comprehensive guide for assembling Woodcraft's Elegant Beauty Rollerball and Fountain Pen Kits, detailing setup, blank preparation, gluing, turning, finishing, and component assembly steps.</p>
	<p><a href="#">TORVO TD3 Dashcam User Manual: Installation, Features, and Operation</a></p> <p>Comprehensive user manual for the TORVO TD3 dashcam, covering installation, button functions, system settings, Wi-Fi connectivity, mobile app usage, FAQs, and technical specifications. Learn how to install, operate, and troubleshoot your TORVO TD3 dashcam.</p>



Detailed information on the Hansgrohe ShowerSelect Comfort Q concealed thermostat for one user, featuring Select technology, flow control, and a brushed black chrome finish. Includes technical specifications, dimensions, and a complete spare parts list.

Detailed information on the Hansgrohe ShowerSelect Comfort Q concealed thermostat for one user, featuring Select technology, flow control, and a brushed black chrome finish. Includes technical specifications, dimensions, and a complete spare parts list.