

GMRS Radio

UV-5RM GMRS SERIES

USER'S MANUAL

How to programming in Chirp?


Chirp model: UV-5G Plus Or GM-5RH

Never pick Model: 5RM, It is not compatible.

Multi Programming Way

Supports CHIRP

This is GMRS Radio, 5RM-GMRS UV5G PLUS
and GM-5RH models can program the radio on Chirp!
Please keep Chirp Updated!

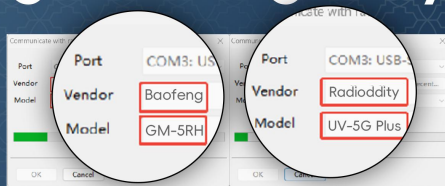

Supports CPS

Download Here:
<https://walkietalkiesoftware.com>
->software->5RM GMRS
Account: BusHound@gmail.com
PW: 123456



PREFACE

Thank you for purchasing GM-5RH Two Way Radio, It is a multitask GMRS transceiver. Combining the latest technology in radio communication along with a sturdy mechanical frame, GM-5RH is the ideal and effective solution for the professionals who need to stay in touch with the working team (in construction sites, buildings, shows, trade fairs or hotels) or for leisure users that just want to keep up with friends and family.

This manual is applicable to the following product: UV-5G PLUS; TH-5RH; BT-5RH; 5RM GMRS Two Way Radios.

IMPORTANT NOTICE

To help you ward off bodily injury or property loss that may arise from improper operation, please read all the information carefully before using our products. This contains instructions for safe usage and RF energy awareness and control for compliance with applicable standards and regulation.

Safety Information for GMRS Radios

Your wireless handheld portable transceiver contains a low power transmitter. When the talk button is pushed, it sends out radio frequency (RF) signals. The device is authorized to operate at a duty factor not to exceed 50%. In August 1996, the Federal Communications Commissions (FCC) adopted RF exposure guidelines with safety levels for handheld wireless devices.

FCC Part 15.21 Warning Statement

THE GRANTEE IS NOT RESPONSIBLE FOR ANY CHANGES OR MODIFICATIONS NOT EXPRESSLY APPROVED BY THE PARTY RESPONSIBLE FOR COMPLIANCE. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

Table of Contents

Chapter1. Getting Started

- 1.1 Regulations and Safety Warnings
- 1.2 Main features
- 1.3 Content of the packaging

Chapter2. Charging the Battery

- 2.1 Charging the Battery Pack
- 2.2 Charger Supplied
- 2.3 Use Caution with the Li-ion Battery
- 2.4 How to Charge
- 2.5 LED Indicator
- 2.6 How to Store the Battery

2.7 Using the Type-C USB Charger

Chapter3. Installation of Accessories

- 3.1 Installing / Removing the Antenna
- 3.2 Installing the belt clip
- 3.3 Installing the battery pack
- 3.4 Additional Speaker/Microphone (Optional)

Chapter4. Radio Overview

- 4.1 Buttons and controls of the radio
- 4.2 Main controls and parts of the radio
- 4.3 Status Indications
- 4.4 Main keypad controls

Chapter5. Basic Operations

- 5.1 Power on the radio

- 5.2 Adjusting the volume

- 5.3 Making a call

- 5.4 Channel selection

- 5.5 Frequency (VFO) mode

- 5.6 Channel (MR) mode

Chapter6. Advanced Features

- 6.1 Frequency scanning

- 6.2 Channel scanning

- 6.3 CTCSS scanning

- 6.4 DCS scanning

- 6.5 Cursor ▼ ▲ Conversion (A/B)

- 6.6 High/low power fast selection

- 6.7 Keypad lock

- 6.9 1000Hz, 1450Hz, 1750Hz Tone-burst

- 6.10 Manual Programming (Channels Memory)

- 6.11 Repeaters Programming

Chapter7. Working the MENU System

- 7.1 Basic use

- 7.2 Using short-cuts

- 7.3 Functions and operations

Appendix A. - Technical Specifications

Appendix B. - Trouble shooting guide

Appendix C. - Shortcut Menu operations

Chapter 1. Getting Started

1.1 Regulations and Safety Warnings

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Important: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this device. Your radio is set up to transmit a regulated signal on an assigned frequency. It is against the law to alter or adjust the settings inside the radio to exceed those limitations. Any adjustments to your radio must be made by qualified technicians.

To be safe and sure:

- Never open your radio's case.
- Never change or replace anything in your radio except the battery.

Your radio might cause TV or radio interference even when it is operating properly. To determine whether your radio is causing the interference, turn it off. If the interference goes away, your radio is causing it. Try to eliminate the interference by moving your radio away from the receiver. If you cannot eliminate the interference, the FCC requires that you stop using the radio.

Hazardous Environments: Do not operate the radio in hazardous environments. Explosion or fire may result.

Do not operate the radio near unshielded electrical blasting caps.

Under certain conditions, radios can interfere with blasting operations and may cause an explosion. Turn your radio OFF to prevent accidental transmission when in a blasting area or in areas posted: "Turn off two-way radio." Construction crews often use remote control RF devices to set off explosives.

Care and Safety: To clean the radio, use a soft cloth dampened with water. Do not use cleaners or solvents because they can harm the body of the unit and leak inside, causing permanent damage. Use a dry, lint-free cloth to clean the battery contacts.

RF Exposure Information

WARNING! Read this information before using the radio. In August 1996 the Federal Communications Commission (FCC) of the United States with its action in Report and Order FCC 96-326 adopted an updated safety standard for human exposure to radio frequency electromagnetic energy emitted by FCC regulated transmitters.

Those guidelines are consistent with the safety standard previously set by both U.S. and international standards bodies. The design of the radio complies with the FCC guidelines and these international standards.

Never allow children to operate the radio without adult supervision and the knowledge of the following guidelines.

WARNING! It is up to the user to properly operate this radio transmitter to insure safe operation. Please adhere to the following:

Use only the supplied or an approved antenna. Unauthorized antennas, modifications, or attachments could impair call quality, damage the radio, or result in violation of FCC regulations.

Do not use the radio with a damaged antenna.

If a damaged antenna comes into contact with the skin, a minor burn may result. Please contact your local dealer for a replacement antenna.

Hand-held Operation (Held-to-Face)

This device was evaluated for typical hand-held (held-to-face) operations with a 1 inch spacing from the front of the radio. For hand-held operation, the radio should be held 1 inch from the user's face in order to comply with FCC RF exposure requirements.

For more information about RF exposure, please visit the FCC web site at www.fcc.gov.

Body-worn Operation

This device was evaluated for body-worn operations with the supplied belt-clip accessory. (All necessary accessories are included in the package; any additional or optional accessories are not required for compliance with the guidelines.) Third party accessories (unless approved by the manufacturer) should be avoided as these might not comply with FCC RF exposure guidelines.

For more information about RF exposure, please visit the FCC web site at www.fcc.gov.

GMRS Communication

This GMRS (General Mobile Radio Service) feature is a land-mobile service available for short-distance, two-way communications in the USA. You must have a valid FCC license to communicate on these channels. The GMRS/FRS frequencies that this radio uses are set aside for communicating with others while hiking, biking, and working; keeping track of family and friends at a crowded public event; checking with travel companions in another car; talking with neighbors; arranging meeting spots with others while shopping at the mall. Licensed users will be issued a call sign by the FCC, which should be used for station identification when operating this radio. GMRS users should also cooperate by engaging in permissible transmissions only, avoiding channel interference with other GMRS users, and being prudent with the length of their transmission time.

FCC License Required

This two-way radio operates on GMRS (General Mobile Radio Service) frequencies which require an FCC (Federal Communications Commission) license. A user must be licensed prior to transmitting on the GMRS band with this radio. Serious penalties could result for unlicensed use of GMRS channels, in violation of FCC rules. Operation of this radio is subject to additional rules specified in 47 C.F.R. Part 95. For licensing information and application forms, please call the FCC Hotline at 800418-FORM. Request form #159 and form #605. Questions regarding the license application should be directed to the FCC at 888-CALL-FCC. Additional information is available on the FCC's website at www.fcc.gov.

NOTE: Even if you operate this radio on FRS (Family Radio Service) channels at low power (0.5 watt), you are required to have an FCC license. Because this radio operates in the 0.5 to 5 watt GMRS power range all GMRS rules apply and will require you have a GMRS license even for FRS (Family Radio Service) communication. Normal FRS only radios operate at a maximum power of 0.5 watt (500 mill watt) power and have an integral (non-detachable) antenna.

FCC Warnings

Replacement or substitution of transistors, regular diodes or other parts of a unique nature, with parts other than those recommended by Pofung may cause a violation of the technical regulations of part 95 of the FCC rules, or violation of type acceptance requirements of part 2 of the rules.

1.2 Main features

- 22 Modifiable GMRS Channels (RX &TX)
- 8 Modifiable GMRS Repeater Channels (RX & TX)

- Scanning receiver frequency range: FM 76-108 MHz; VHF 136-260MHz, UHF 400-520MHz
- One touch search frequency, easy pairing and grouping (copying channel configuration parameters)
- Frequency step, selectable between 2.5K | 5.0K | 6.25K | 10.0K | 12.5K | 20.0K | 25.0K | 50.0K
- Frequency hopping and scramble functions to keep your call privacy confidential
- 1.77" TFT large screen, full keyboard, fully open menu operation
- Channel scan, frequency scan, and three scan and recovery methods: TO, CO, and SE
- Up to 999 memory channels.
- Power-on password management function
- DTMF encoder and DTMF manual dial
- VOX (voice activated transmit).
- Alarm function.
- Programmable repeater offset.
- Transmission time-out timer.
- LED flashlight.
- End of transmission tone, aka "Roger Beep"
- Support NOAA weather reception function in the United States and Canada
- Broadcast FM radio receiver 76-108 MHz
- Dual watch / Dual reception/ Dual-band handheld transceiver
- High Capacity Lithium-Ion battery.
- Stopwatch function
- Display illumination programmable via keypad.
- Battery save function.
- Busy channel lock out.
- Ten (10) levels of Squelch adjustment.
- Two (2) pins for Kenwood accessory port

1.3 Content of the packaging

- | | |
|-------------|-------------------------|
| • 1 Radio | • 1 Li-Ion battery pack |
| • 1 Antenna | • 1 Belt clip |

If any item is missing, please verify with your dealer.

Chapter2. Charging the Battery

2.1 Charging the Battery Pack

The Li-ion battery pack is not charged at the factory; please charge it before use. Charging the battery pack for the first time after purchase or extended storage (more than 2 months) may not bring the battery pack to its normal maximum operating capacity. Best operation will require fully charging/ discharging the battery two or three times before the operating capacity will reach its best performance. The battery pack life may be depleted when it's operating time decreases even though it has been fully and correctly charged. If this is the case, replace the battery pack.

2.2 Charger Supplied

Please use the specified charger provided by our company. Other models may cause explosion and personal injury. After installing the battery pack, and if the radio displays low battery with a voice prompt, please charge the battery.

2.3 Use Caution with the Li-ion Battery

- a. Do not short the battery terminals or throw the battery into a fire. Never attempt to remove the casing from the battery pack, as our company cannot be held responsible for any accident caused by modifying the battery.
- b. The ambient temperature should be between 5°C-40°C (40°F - 105°F) while charging the battery. Charging outside this range may not fully charge the battery.
- c. Please turn off the radio before inserting it into the charger. It may otherwise interfere with correct charging.
- d. To avoid interfering with the charging cycle, please do not cut off the power or remove the battery during charging until the green light is on.
- e. Do not recharge the battery pack if it is fully charged. This may shorten the life of the battery pack or damage the battery pack.
- f. Do not charge the battery or the radio if it is damp. Dry it before charging to avoid damage.



WARNING !

When keys, ornamental chain or other electric metals contact the battery terminal, the battery may become damage or

injure a human. If the battery terminals are short circuited it will generate a lot of heat. Take care when carrying and using the battery. Remember to put the battery or radio into an insulated container. Do not put it into a metal container.

2.4 How to Charge

- Plug the AC adaptor into the AC outlet, and then plug the cable of the AC adaptor into the DC jack located on the back of the charger. The indicator light blinks orange and is then ready to charge a battery.
- Plug the battery or the radio into the charger. Make sure the battery terminals are good in contact with charging terminals. The indicator light turns to red--- charging begins.
- It takes approximately 2-5 hours to fully charge the battery. When the lamp lights green, the charging is completed. Remove the battery or the radio unit with its battery from socket.

When charging a radio (with battery) the indicating lamp will not turn into green to show the fully charged status if the radio is powered on. Only when the radio is switched off will the lamp indicate normal operation. The radio consumes energy when it is power-on, and the charger cannot detect the correct battery voltage when the battery has been fully charged. So the charger will charge the battery in constant voltage mode and fail to indicate correctly when the battery has been fully charged.

2.5 LED Indicator

STATUS	LED
No Battery	Green and red alternately flashing
Charge Normally	Red
Fully Charged	Green
Trouble	Red blinks fast for a long time

NOTE: Trouble means battery too warm, battery short-circuited or charger short-circuited.

2.6 How to Store the Battery

- If the battery needs to be stored, keep it in status of 80% discharged.
- It should be kept in low temperature and dry environment.
- Keep it away from hot places and direct sunlight.
 - » Do not short circuit the battery terminals.
 - » Never attempt to remove the casing from the battery pack.

- » Never store the battery in unsafe surroundings, as a short may cause an explosion.
- » Do not put the battery in a hot environment or throw it into a fire, as it may cause an explosion.

2.7 Using the Type-C USB Charger

The Type-C USB charger is a handy port that allows you to conveniently charge your Li-ion battery pack.

1. Make sure your radio is turned OFF.
2. Plug the Type-C USB cable into the Type-C USB charging port on your battery. Connect the other end of the micro-USB charger to wall power outlet.
3. An empty battery will be fully charged in 4 hours.
4. The battery meter on LCD will move to indicate the battery is charging.

Note:

- *It is recommended to power OFF your radio while charging. However, if power is turned on while charging, you may not be able to transmit a message if the battery is completely empty. Allow time for the battery to charge to 1 bar before attempting to transmit a message.*
- *For optimal battery life, remove the radio from the charger within 6 hours. Do not store the radio while connected to the charger.*

Chapter3. Installation of Accessories

Before the radio is ready for use we need to attach the battery pack, as well as charge the battery.

3.1 Installing/ Removing the Antenna

- 1). Installing the Antenna: Screw the antenna into the connector on the top of the transceiver by holding the antenna at its base and turning it clockwise until secure.
- 2). Removing the Antenna: Turn the antenna counter-clockwise to remove it.

3.2 Installing the belt clip

- 1). At the back of the radio there are two parallel screws mounted above the battery, remove these and thread them through the holes on the belt clip as you screw them back into the radio body.
- 2). Removing the Belt Clip: Unscrew counter-clockwise to remove the belt clip.

3.3 Installing the battery pack

Before attaching or removing the battery make sure your radio is turned off by turning the power/volume knob all the way counter-clockwise.


- 1). Make sure the battery is aligned in parallel with the radio body with the lower edge of the battery about 1-2cm below the edge of the radio.
- 2). Once aligned with the guide-rails, slide the battery upward until you hear a click as the battery locks in place.

Remove the battery pack

To remove the battery, press the battery release above the battery pack, as you slide the battery downward.


3.4 Installing the Additional Speaker/Microphone (Optional)

Pry open the rubber MIC-Headset jack cover and then insert the Speaker / Microphone plug into the double jack.

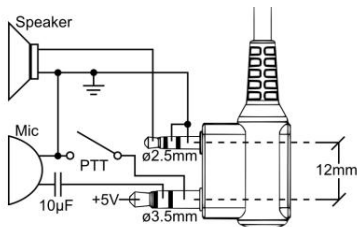

Chapter4. Radio Overview

4.1 Buttons and controls of the radio

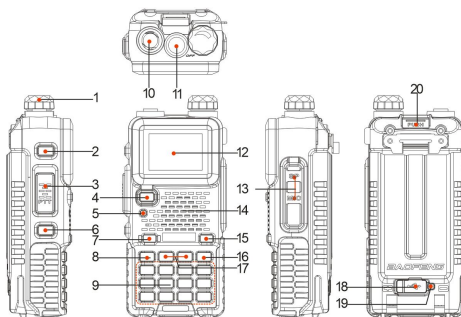

1. Power/Volume knob

4. VFO/MR mode key
key

7. A / B select key

10. Antenna jack.


13. Accessory jack

16.  Key (EXIT)

19. Type-C charging indicator



2.SK1- **Broadcast FM and Alarm** key

5. Status LED

8.  Key (MENU)

11. LED flashlight

14. Speaker and microphone

17.  or  navigation keys

20. Battery release latch

3. PTT key

6. SK2-Flashlight and Monitor









9. Numeric keypad

12. Color LCD


15. One-Touch search key

18. Type-C charging port

4.2 LCD Display

Icon	Description
RSSI	Squelch Open/ Close Indicator
H/L	Transmit power level indicator, According to Power (High/Low)
	Make sure you can hear the DTMF side tone from the radio speaker, set to DT-ST, ANI-ST, DT+ANI.
	DCS enabled
	CTCSS enabled
+	Enables access of repeaters in VFO/Frequency Mode. TX will be shifted higher in frequency than RX.
-	Enables access of repeaters in VFO/Frequency Mode. TX will be shifted lower in frequency than RX
D	Dual watch enabled
	Keypad lock enabled
	VOX enabled
	The confidential calling feature is activated
N	Narrowband enabled
	Battery level indicator
R	Reverse function enabled
	Indicates active band or channel

Battery Level Indicator

When the battery level indicator reads  the battery is depleted. At this point the radio will start beeping periodically as well as flash the backlight of the display and when voice prompts are enabled, a "Low Voltage" announcement will be heard, indicating that you need to change your battery or put your radio in the charger.

4.3 Status Indications

The status LED has a very simple and traditional design.

LED Indicator	Radio Status
Constant Red	Transmitting.
Constant Green	Receiving.

4.4 Main keypad controls

- **Side key 1 (Broadcast FM and Alarm)**

Press [SK1] key momentarily to start the broadcast FM receiver. Another momentary press turns the broadcast FM receiver off. If a signal is received on the active frequency or channel while you are listening to the broadcast FM, the receiver will open squelch to that frequency (as if scanning) and remain there until the signal goes away; it will then switch back to broadcast FM.

Press and hold [SK1] key to activate the alarm function. Press [SK1] (a short press) again to turn it off

- **Side key 2 (Monitor and Flashlight)**

Press [SK2] key momentarily to turn on the LED flashlight. Another momentary press will flash the LED. Another momentary press turns the flashlight off.

Press and hold [SK2] to monitor the signal. This will open up the squelch so you can listen to the unfiltered signal.

- **VFO/MR - mode key**

Pressing [VFO/MR] key switches between Frequency (VFO) Mode and Memory (MR) mode. Memory mode is sometimes also referred to as Channel mode.

To save frequencies to channel memory you must be in Frequency (VFO) mode.

- **A/B select key**

The [A/B] key switches between A (upper) and B (lower) displays. The frequency or channel on the selected display becomes the active listening and transmit frequency or channel.

To save frequencies to channel memory you must be on the A display.

- **⏏ key**

The ⏏ key to switch between VHF or UHF bands. Press and hold the ⏏ key to activate the one-touch search function.

When listening to broadcast FM, the  key switches between 65-75 MHz and 76-108 MHz bands.

-  key

It is used for activating the MENU, choose each MENU selection and confirm the parameter.

-  key


Press it for more than 2 seconds, the channel and frequency will move upwards rapidly; in SCAN mode, press this control to move the scanning upwards.

-  key

Keep it pressed it for more than 2 seconds, the channel and frequency will move downwards rapidly; in SCAN mode, press this control to move the scanning downwards.

-  key

Press to exit the Menu and functions.

Press and hold the  key to activate the one-touch search function.

- **Numeric keypad**


With these keys you can input the information or your selections on the radio. In tx mode, press the number keys to send a corresponding DTMF code.


- **Star * Key**


A short momentary press of the key enables the reverse function.

If you press this key for more than 2 seconds you will lock/unlock the keypad.

- **Pound # Key**

Press the  key to activate the DTMF dial function.

Press and hold the  key to activate the channel scan or frequency scan function.

In FM radio mode, press the  key to automatically search for broadcast programs.

- **0 key**

Press and hold the **[0SQL]** key to activate the NoAA weather forecast reception function

Chapter 5. Basic Operations

5.1 Power on the radio

- **Turning the unit on**

To turn the unit on, simply rotate the Volume/Power knob clockwise until you hear a "click". If your radio powers on correctly there should be an audible double beep after about one second and the display will show a message or flash the LCD depending on settings for about one second. Then it will display a frequency or channel. If the Voice prompt is enabled, the voice will announce "frequency mode" or "channel mode".

- **Turning the unit off**

Turn the Volume/Power knob counter-clock wise all the way until you hear a "click". The unit is now off.

5.2 Adjusting the volume

To turn up the volume, turn the volume/power knob clock-wise. To turn the volume down, turn the Volume/Power knob counter-clock-wise. Be careful not to turn it too far, as you may inadvertently turn your radio off.

By using the monitor function, enabled from the [FM broadcast/Monitor] key below the PTT, you can more easily adjust your volume by adjusting it to the un-squelched static.

5.3 Main Band/Sub Band Select

In standby mode, press the [A/B] key to switch between A (upper) and B (lower) displays. The frequency or channel on the selected display becomes the active listening and transmit frequency or channel.

To save frequencies to channel memory you must be on the A display.

5.4 VFO/Channel Switch

Press the [VFO/MR] key to switch between VFO and channel display.

- In channel mode (MR), the channel number will be displayed on the right.
- In frequency mode (VFO), the 'VFO' will be displayed on the right.

5.5 Frequency (VFO) mode

In Frequency (VFO) mode you can navigate up and down the band by using the ▲ or ▼ keys. Each press will increment or decrement your frequency according to the frequency step you've set your transceiver to. You can also input frequencies directly on your numeric keypad with kilohertz accuracy. The following example assumes the use of a 12.5 kHz frequency step.

Example. Entering the frequency 436.61250 MHz on display A

- (1) In standby mode, press [VFO/MR] key to switch to the frequency (VFO) mode.
- (2) Enter [4][3][6][6][1][2][5] [0] on the numeric keypad.

WARNING!

Just because you can program in a channel does not mean you're automatically authorized to use that frequency. Transmitting on frequencies you're not authorized to operate on is illegal, and in most jurisdictions a serious offence. However, it is legal in most jurisdictions to listen. Contact your local regulatory body for further information on what laws, rules and regulations apply to your area.

5.6 Channel (MR) mode and Channel selection

There are two modes of operation: Frequency (VFO) mode, and Channel or Memory (MR) mode. For everyday use, Channel (MR) mode is going to be a whole lot more practical than Frequency (VFO) mode. However, Frequency (VFO) mode is very handy for experimentation out in the field. Frequency (VFO) mode is also used for programming channels into memory.

In Channel (MR) mode you can navigate up and down the channel by using the ▲ or ▼ keys or the encoder. Ultimately which mode you end up using will depend entirely on your use case.

Press [VFO/MR] key to switch the radio between VFO and Channel mode, select Channel mode.

- **Operation 1:** Press the ▲ or ▼ navigation key to select the channel.
- **Operation 2:** Input the channel numbers by the keyboard. For example, if you want switch to channel 12, input [0][1][2] a total of 3 digits, and it will switch to channel 12.

When the voice prompt function is enabled, the corresponding channel will be broadcast by voice.

5.7 Making a call

NOTE: Press the [A/B] key to switch the main channel to the other channel if there are 2 channels shown on the display. In standby mode, press [VFO/MR] key to switch between frequency (VFO) mode and channel (MR) mode.

- **Channel mode call:** After selecting a channel, hold down the [PTT] key to initiate a call to the current channel. Speak into the microphone with normal tone. Making a call, the red LED is on.
- **Frequency mode call:** Press [VFO/MR] key to switch to the frequency mode, input the working frequency within the allowable frequency range, and press and hold the [PTT] key to transmit on the current frequency. Speak into the microphone with normal tone. Making a call, the red LED is on.
- **Receive a call:** When you release the [PTT] key, you can answer it without any action.
When receiving a call, the green LED is on.

NOTE: To ensure the best reception volume, keep the distance between the microphone and the mouth at the time of transmission from 2.5 cm to 5 cm.

5.8 Using the Flashlight

You can use this radio in an emergency. If you press [SK2] key, the radio turns on the high-intensity LED flashlight on your radio.

- Your radio operates normally when the emergency strobe is activated.
- (1) Press [SK2] key once, it will turn on continuously (Always On mode).
 - (2) And then, press [SK2] key once, the Strobe Light emits the emergency signal (Strobe emergency mode).
 - (3) And then, press [SK2] key once, the light will be turned off.

5.9 Emergency Alert


The Emergency Alert feature can be used to signal members in your group for help.




To activate the emergency alert function, press and hold the [SK1] key for 3 seconds. The radio will send out a loud siren sound and the flashlight will flash.

Press the [SK1] key to exit the emergency alert function.

WARNING: The Emergency Alert feature should only be used in the even of an actual emergency.

5.10 FM Radio (FM)

The frequency ranges to listen to the radio is 65-108MHz. When listening to broadcast FM, press  key switches between 65-75 MHz and 76-108 MHz band.

- (1) In frequency or channel mode, Press [SK1] key to turn on the radio.
- (2) Select the desired radio frequency with the  or  keys or input the frequency. Or
 - Press  to automatically search a radio station.
- (3) Press [SK1] key to exit FM radio.

Note: while you are listening to the radio, the frequency or channel of A / B receiving signal will automatically switch to the frequency or channel mode for normal transmitting and receiving.

When the signal disappears the radio will automatically switch again to FM radio mode.

5.11 Monitor


In standby, press and hold the [SK2] key to enter Monitor. When receiving matched carrier but the signaling or the signal is too weak, this function allows monitor the weak signal.

Stop pressing the [SK2] key to turn off the speakers and return to standby mode.

» *If no signal, it will emit noise when press the [SK2] Key.*

5.12 Keypad lock


The radio features a keypad lock that locks out all keys except for the three side keys.

To enable or disable the keypad lock, press and hold  the key for about two seconds.

You can also enable so that the radio automatically locks the keypad after ten seconds from the menu.

5.13 Frequency reversal

A short momentary press of the key enables the reverse function

If you for some reason want to listen to the repeater's input frequency instead, press  key momentarily and you'll reverse your transmit and receive frequencies.


» *After activating the frequency reversal function, the first line of the screen displays "R"*

5.14 TX Repeaters tone


Press [PTT] + [SK2] key to send 1750Hz repeaters tone. This function is useful for communications through repeaters.


If you have the keypad lock enabled on your radio, you can still send a 1750Hz tone the regular way without having to unlock your radio.

5.15 One touch frequency Search

(1) The radio will act as a receiver. Press and hold the  key, and the screen will display "SEARCH SEARCH..."

(2) If the transmitter continues to transmit and the unit receives an effective frequency (the strongest and stable signal), the received frequency will be displayed. If there is a CTCSS or DCS, the CTCSS or DCS value is displayed, and if there is no CTCSS or DCS, NONE is displayed

(3) You can press the  key to save the Search frequency and CTCSS or DCS to the channel.


Note: During frequency Search, press the  key on the radio to switch between UHF or VHF bands.







5.16 Weather Radio/Scan Weather Channel


Your radio has a NOAA Weather Radio function, to enable the user to receive weather reports from designated NOAA stations.

Your radio also has a NOAA Weather Scan function, to enable the user to scan all 10 channels of the NOAA Weather Radio.

(1) To turn the NOAA Weather Scan on, press the [0SQL] key for 3 seconds,  icon appears. The radio will go to Weather band mode.

(2) Press and hold the  key for 3 seconds to start automatic scanning of all 10 channels and stop on active channels. Pressing and hold the  key for 3 seconds during a NOAA weather scan will stop the scan.

(3) After stopping NOAA weather scan, it is allowed to manually select the weather channel by press the  or  key.

(4) To exit the Weather Radio broadcast mode, press the  key or [PTT] key.

Weather channel frequencies and names

Channel Number	RX Frequency MHz	Channel Number	RX Frequency MHz
<i>Wx -01</i>	162.550	<i>Wx -06</i>	162.500
<i>Wx -02</i>	162.400	<i>Wx -07</i>	162.525
<i>Wx -03</i>	162.475	<i>Wx -08</i>	161.650
<i>Wx -04</i>	162.425	<i>Wx -09</i>	161.775
<i>Wx -05</i>	162.450	<i>Wx -10</i>	163.275

NOTE: Weather Channels Wx 1 Thru 10, Receive-only channels for NOAA and Canadian weather broadcasts. You cannot transmit on these channels.

Chapter6. Advanced Features










6.1 Working the menu system

For a complete reference on available menu items and parameters, see Appendix B, Menu definitions.

If your radio is set to Memory (MR) mode, the following menu items will not take any effect: STEP, TXP, W/N, CTCSS, DCS, S-CODE, PTT-ID, BCL, SFT-D, OFFSET, MEM-CH.

6.1.1 Basic use

Using the menu with arrow keys

1. Press the  key to enter the menu.
2. Use the  /  keys to navigate between menu items.
3. Once you find the desired menu item, press  again to select that menu item.
4. Use the  /  keys to select the desired parameter.
5. When you've selected the parameter you want to set for a given menu item;
 - a. To confirm your selection, press  and it will save your setting and bring you back to the main menu.
 - b. To cancel your changes, press  and it will reset that menu item and bring you out of the menu entirely.
6. To exit out of the menu at any time, press  the key.






6.1.2 Using short-cuts

As you may have noticed if you looked at Appendix B, *Menu definitions*, every menu item has a numerical value associated with it. These numbers can be used for direct access of any given menu item.

The menu is also organized in such a way that the ten most common functions are on top.

The parameters also have a number associated with them, see Appendix B, *Menu definitions* for details.



Using the menu with short-cuts

1. Press the  key to enter the menu.
2. Use the numerical keypad to enter the number of the menu item.
3. To enter the menu item, press the  key.
4. For entering the desired parameter you have two options:
 - a. Use the arrow keys as we did in the previous section; or
 - b. Use the numerical keypad to enter the numerical short-cut code.
5. And just as in the previous section;
 - a. To confirm your selection, press  and it will save your setting and bring you back to the main menu.
 - b. To cancel your changes, press  and it will reset that menu item and bring you out of the menu entirely.
6. To exit out of the menu at any time, press the  key.
7. All further examples and procedures in this manual will use the numerical menu shortcuts.

6.2 Scanning

The Radios features a built in scanner for the VHF and UHF bands. When in Frequency (VFO) mode it will scan in steps according to your set frequency step. In Channel (MR) mode it will scan your channels. At approximately three frequencies per second, it's not the fastest scanner in the world, but it is nonetheless a useful feature to have at times.





Dual Watch is inhibited while scanning

To enable the scanner, press and hold the  key for about two seconds. Press and hold the  key to exit scanning mode.

6.2.1 Scanning modes

The scanner is configurable to one of three ways of operation: Time, carrier or search, each of which is explained in further details in their respective section below.

Procedure 5.1. Setting scanner mode

1. Press the  key to enter the menu.
2. Enter 2 1 on your numeric keypad to come to scanner mode.
3. Press the  key to select.
4. Use the UP and DOWN keys to select scanning mode.
5. Press the  key to confirm and save.
6. Press the  key to exit the menu.

• Time operation


In Time Operation (TO) mode, the scanner stops when it detects a signal, and after a factory preset time out, it resumes scanning.

• Carrier operation

In Carrier Operation (CO) mode, the scanner stops when it detects a signal, and after a factory preset time with no signal it resumes scanning.





• Search operation

In Search Operation (SE) mode, the scanner stops when it detects a signal.

To resume scanning you must press and hold the  key again.

6.2.2 Frequency scanning

This function can scan the frequency.

- a. In frequency mode, press  key for more than 2 seconds. The radio will start scanning the frequency according to the set frequency step.
- b. You can change the scanning direction with the  /  keys.
- c. Press  key to stop the scanning.

Note: for Scan mode, see Menu No.21.

6.2.3 Channel scanning

This function can scan the channels.

- a. In channels mode, press **[#Z]** key for more than 2 seconds. The radio will start scanning according to the channel you set.
- b. You can change the scanning direction with the **▲/▼** keys.
- c. Press **[#Z]** key to stop scanning.

Note: for Scan mode, see Menu No.21.

6.2.4 Scan CTCSS

The function allows scanning the frequencies with CTCSS tone enabled.

- a. In standby mode, press **[M] [1][4]**, “Scan CTCSS” will appear on the display.
- b. Press **[M]** key and the scan of CTCSS tones will start.

NOTES: The function cannot be activated when the radio is set in Channel mode. The Scan will start only when the receiving band will detect a signal.

6.2.5 Scan DCS

This function allows scanning the frequencies with DCS code enabled.

- a. In standby mode, press **[M] [1][5]**; the display will show “Scan DCS”.
- b. Press **[M]** key and the scan of DCS codes will start.

NOTES: The function cannot be activated when the radio is set in Channel mode. The Scan will start only when the receiving band will detect a signal.

6.3 Manual Programming (Channels Memory)

Memory channels are an easy way to store commonly used frequencies so that they can easily be retrieved at a later date.

The radios features 999 memory channels that each can hold: Receive and transmit frequencies, transmit power, group signaling information, bandwidth, ANI/ PTT-ID settings and a six character alphanumeric identifier or channel name ¹.

Frequency Mode vs. Channel Mode

In standby mode, press [VFO/MR] key to switch between frequency (VFO) mode and channel (MR) mode.

These two modes have different functions and are often confused.

Frequency Mode (VFO): Used for a temporary frequency assignment, such as a test frequency or quick field programming if

permitted.

Channel Mode (MR): Used for selecting preprogrammed channels.
















Ex 1. Programming a Channel Repeater Offset with CTCSS Tone

EXAMPLE New memory in Channel 10:

RX = **432.55000** MHz

TX = **437.55000** MHz (This is a (+ 5) Offset)

TX CTCSS tone 123.0








- a. Press the  key to switch between menus.
- b. Press [VFO/MR] key to set the radio to VFO mode, and the VFO icon is displayed on the right.
- c.  [3][1]  [1] [0]  **Deletes Prior Data in channel (Ex. 10)**
- d.  [1][2]  123.0  **Selects desired TX encode tone**
- e. Enter RX frequency (Ex. **43255000**)
- f.  [3][0]  [1][0] 
-->>  **Enter the desired channel (Ex 10)**
RX has been added
- g. Enter TX frequency (Ex. **43755000**)
- h.  [3][0]  [1][0] 
-->>  **Enter the same channel (Ex 10)**
TX has been added
- i. Press [VFO/MR] key to return to the MR mode and the channel number will reappear.


Ex 2. Programming a Simplex Channel with CTCSS tone

EXAMPLE New memory in Channel 10:

RX = **432.6625** MHz

TX CTCSS tone 123.0

- a. Press the  key to switch between menus.
- b. Press [VFO/MR] key to set the radio to VFO mode, and the VFO icon is displayed on the right.
- c.  [3][1]  [1] [0]  **Deletes Prior Data in channel (Ex. 10)**
- d.  [1][2]  123.0  **Select desired TX encode tone (Ex 123 CTCSS)**

-->>Use  to select Upper display

e. Enter RX frequency (Ex. 43266250)

f.  [3][0]  [1][0] 

-->> 

Enter the desired channel (Ex 10)

Channel has been added


g. Press [VFO/MR] key to return to the MR mode and the channel number will reappear.

6.4 Repeaters Programming

The following instructions assume that you know what transmit and receive frequencies your repeater employs, and that you're authorized to use it.

a. Press [VFO/MR] key to set the radio to VFO mode, and the VFO icon is displayed on the right.


b. Use the numeric keypad to enter the repeater's output (your receiving) frequency.

c. Press the  key to enter the menu.



d. Enter [2][9] on the numeric keypad to get to frequency offset.


e. Press  key to select.

f. Use the numerical keypad to enter the specified frequency offset. See the section called “**29 OFFSET** - Frequency shift amount” for details.

g. Press  key to confirm and save.

h. Enter [2][8] on the numeric keypad to get to offset direction.


i. Use the  /  keys to select + (positive) or - (negative) offset.

j. Press  key to confirm and save.

k. Optional:

a). Save to memory, see the section called “Manual programming” for details.

b). Set up CTCSS; see the section called “CTCSS” for details.

l. Press  key to exit the menu. If everything went well, you should be able to make a test call through the repeater.

NOTE:

If you're experiencing problems making a connection to the repeater, check your settings and/or go through the procedure again.

Certain Amateur Radio repeaters (especially in Europe) use a 1750Hz tone burst to open up the repeater. To see how this is

done with the radios, see the section called “1750Hz Tone-burst”.


If you're still unable to make a connection, contact the person in charge of the radio system with your employer or your local amateur radio club, as the case may be.





If you for some reason want to listen to the repeater's input frequency instead, press  key momentarily and you'll reverse your transmit and receive frequencies.


This is indicated in the LCD on the radio with an R in the top row, next to the + and - for the offset direction.

6.5 VOX

This function allows hands-free conversations: just speak in the direction of the microphone and the communication will be automatically activated.

In standby mode, press  + 7. The screen will display “VOX”.

Press  key to enter the function. Press the  /  keys to turn off the VOX function or to select the VOX level (1-10), then press  key to confirm.

To return to the standby mode press  key.


NOTE: level 1 is the least sensitive while level 9 is the most sensitive. When the radio is in Scan or FM Radio mode, the VOX is not enabled.




6.6 Dual Watch

In certain situations, the ability to monitor two channels at once can be a valuable asset. This can be achieved in one of two ways. You can either have one receiver in your radio and flip-flop between two frequencies at a fixed interval (known as Dual Watch), or you can equip a radio with two receivers (known as Dual Receive or Dual VFO). The former method is cheaper to implement and far more common than the latter.

The Radios features Dual Watch functionality (single receiver) with the ability to lock the transmit frequency to one of the two channels it monitors.





Enabling or disabling Dual Watch mode

1. Press the  key to enter the menu.

2. Enter 7 on the numeric keypad to get to **Dual Watch**.
3. Press  key to select.
4. Use the UP and DOWN keys to enable or disable.
5. Press the  key to confirm.
6. Press the  key to exit the menu.



6.7 Stopwatch timer


In standby mode, press  + 44. The screen displays “STOP WATCH”.

Press  to enter the function. Press the  /  keys to enable (ON) the function, then press  key for confirmation.

To return to the standby mode press  key.

Using the stopwatch timer:

When this function is ON, press  key to start counting; Press  key again to re-start counting.

To exit the function, stop the counting first, and then press the  key.



6.8 DTMF







DTMF is an in-band signaling method using dual sinusoidal signals for any given code. Originally developed for telephony systems, it has proved a very versatile tool in many other areas.

In two-way radio systems, DTMF is most commonly used for automation systems and remote control. A common example would be in amateur radio repeaters where some repeaters are activated by sending out a DTMF sequence (usually a simple single-digit sequence).

DTMF frequencies and corresponding codes

	1209Hz	1336Hz	1477Hz	1633Hz
697Hz	1	2	3	A
770Hz	4	5	6	B
852Hz	7	8	9	C
941Hz	*	0	#	D

The radios has a full implementation of DTMF, including the A, B, C and D codes.


The numerical keys, as well as the , and , keys correspond to the matching DTMF codes as you would expect. The A, B, C and D codes are located in the , ,  and  keys respectively.





To send DTMF codes, press the key(s) corresponding to the message you want to send while holding down the PTT key.
If you have the keypad lock enabled on your radio, you can still send DTMF tones the regular way without having to unlock your radio.


6.9 Customization

The radio allows you to define visual and audible features such as Display Illumination Time, MR/Channel Mode Display Format, Power On Message, Power On password, Keypad Beep, Roger Beep, Voice Prompt, etc. to suit your usage habits.

6.9.1 Display backlight (ABR) - MENU 7


In standby mode, press  + 7. The screen will display “ABR”.




Press  key to enter the function. Press the  /  keys to select the always on/required delay time (ON/5sec/10sec/15sec/20sec) the backlight of the display, then press  key to confirm.


To return to the standby mode press  key.

6.9.2 Beep PROMPT (BEEP) - MENU 8


If you enable this function, every time a key is pressed, you will hear a Beep tone.




In standby mode, press  + 8. The screen will display “BEEP PROMPT”.

Press  key to enter the function. Press the  /  keys to turn ON/OFF the beep function.

Press  key to confirm and exit to return to stand-by mode.

6.9.3 Voice function (VOICE) - MENU 17

In standby mode, press  + 17; the screen will display “VOICE”.

Press  key to enter the function. Press the  /  keys to select OFF/ON. Confirm your selection by pressing MENU.

To return to the standby mode press  key.

6.9.4 Language of the MENU (LANGUAGE) - MENU 18

This section shows the language of the MENU (English).




In standby mode press  + 18. The display will show “LANGUAGE”.


6.9.5 Working Mode (MDF-A) - MENU 24

The radio has four working modes available:

- Frequency mode (FREQ)
- Channel mode (CH)
- Channel name (NAME)

To shift from one mode to another one:


In Standby mode press  + 24; select the desired working mode with the  /  keys.





Press  key again to confirm your selection.

6.9.6 Roger Beep, end Transmission Tone (ROGER) - MENU 36

Roger Beep can be enabled/disabled:

- OFF: Roger Beep disabled
- ON: Roger Beep tone at the end of transmission

In standby mode, press  + 36; the screen will display “**ROGER**”.

Press  to enter the function. Press the  /  keys to select OFF/ON. Confirm your selection by press  key.


To return to the standby mode press  key.




6.9.7 Power On Message (POWER ON MSG) - MENU 40


With this Menu you can customize the welcome message that appears on the display when the radio is switched on.

Choose amongst the following options:

- VOLTAGE (the power voltage is momentarily displayed)
- MESSAGE (welcome message)
- LOGO (Custom Pictures)
- MODEL NAME (the model name of the radio will be displayed)

In Standby mode press  + 40. The display will show “**POWER ON MSG**”.



Press  key to enter the function. Press the  /  keys to select the desired option and confirm with MENU.


To return to the standby mode, press  key.

6.9.8 Power On Password (Power On Password) - Menu 43

With this Menu you can request the correct password when the radio is turned on.

In standby mode, press MENU + 43. The display will show "POWER ON PWD"

Press  key to enter the function. Press the  keys to enable/disable (ON/OFF) the power on password and confirm with MENU.

To return to standby mode, press  key.


Enable the power on password function. Each time the radio is turned on, it will display "Input Password" to prompt for the correct password.

6.10 Reset - MENU 42


This transceiver has two Reset modes available: VFO and ALL.

- Reset VFO: all the settings except channels will return to the default settings.
- Reset ALL: all settings will return to the default settings.


Reset VFO

In standby mode, press  + 42; the screen will display “RESET”.


Press  to enter the function. Press the  keys to select VFO, then press  to confirm.

The display will show “**Sure to reset?**”. Press  again to confirm and the screen will display “**Wait...**”. Then, the transceiver will turn off and reboot again.

Reset ALL

In standby mode, press  + 42. The screen displays “RESET”.

Press  to enter the function. Press the  keys to select ALL, then press  to confirm.

The display will show “**Sure to reset?**”. Press  again to confirm; the screen will display “**Wait...**”. Then, the transceiver will turn off and reboot again.

Appendix A. – Trouble shooting guide

Phenomena	Analysis	Solution
You cannot turn on the radio.	The battery may be installed improperly.	Remove and reattach the battery.
	The battery power may run out.	Recharge or replace the battery.
	The battery may suffer from poor contact caused by dirty or damaged battery contacts.	Clean the battery contacts or replace the battery.
During receiving, the voice is weak or intermittent.	The battery voltage maybe low.	Recharge or replace the battery.
	The volume level may be low.	Increase the volume.
	The antenna maybe loose or maybe installed incorrectly.	Turnoff the radio, and then remove and reattach the antenna.
	The speaker maybe blocked.	Clean the surface of the speaker.
You cannot communicate with other group members.	The frequency or signaling type maybe inconsistent with that of other members.	Verify that your TX/RX frequency and signaling type are correct.
	You may be too far away from other members.	Move towards other members.
You hear unknown voices or noise.	You may be interrupted by radios using the same frequency.	Change the frequency, or adjust the squelch level.
	The radio in analog mode maybe set with no signaling.	Request your dealer to set signaling for the current channel to avoid interference
You are unable to hear anyone because of too much noise and hiss.	You may be too far away from other members.	Move towards other members.
	You may be in an unfavorable position. For example, your communication may be blocked by high buildings or blocked in an underground area.	Move to an open and flat area, restart the radio, and try again.
	It may be the result of external disturbance (such as electromagnetic interference).	Stay away from equipment that may cause interference.
The radio keeps transmitting.	VOX may be turned on or the headset is not installed in place	Turn off the VOX function. Check that the headphones are in place.


NOTE: *If the above solutions cannot fix your problems, or you may have some other queries, please contact your dealer for more technical support.*

Appendix B. - Shortcut Menu operations


MENU	Name (Full Name)	Settings	Description
0	SQL - Squelch Level	[0 - 9] Setting the squelch to 0 will open up the squelch entirely.	Squelch silences the receiver when there is no signal. - Sensitivity can be varied from .1 to .3 mV on UHF Sensitivity can be varied from .1 to .2 mV on VHF
1	STEP -Step Frequency	2.5K[0] 5.0K[1] 6.25K[2] 10.0K[3] 12.5K[4] 20.0K[5] 25.0K[6] 50.0K[7]	Selects the amount of frequency change in VFO/Frequency mode when scanning or pressing the ▲/▼ keys.
2	TXP - Transmit Power	HIGH Middle LOW	HIGH =5W; Middle=3W; LOW=0.5W
3	SAVE - Battery Save	OFF [0] 1 2 3 4	Selects the ratio of sleep cycles to awake cycles (1:1, 2:1, 3:1, 4:1). The higher the number the longer the battery lasts. The higher number increases the RX sleep cycle, but you may miss the first few syllables before the RX opens.
4	VOX - Voice Operated TX	OFF [0] 1 2 3 4 5 6 7 8 9 10	When enabled it is not necessary to press the [PTT] key on the transceiver. Adjust the gain level to an appropriate sensitivity to allow smooth transmission.
5	WN - Wideband / Narrowband	WIDE [0] NARR [1]	Wideband (25 kHz bandwidth) or narrowband (12.5 kHz bandwidth).
6	ABR - Display Illumination Time	ON [0] 1 2 3 4 5 6 7 8 9 10	Time-out for the LCD backlight. (seconds)
7	TDR - Dual Watch, Dual Reception	OFF [0] ON [1]	Monitor [A] and [B] at the same time. The display with the most recent activity ([A] or [B]) becomes the selected display

8	BEEP - Keypad Beep	OFF [0] ON [1]	Allows audible confirmation of a key press
9	TOT- Transmission Time-out-Timer	OFF [0] 15[1] - 180[12] in 15 second steps (TIMEOUT-15)/15=[n]	*This feature provides a safety switch that limits transmission time to a programmed value. This will promote battery conservation by not allowing you to make excessively long transmissions, and in the event of a stuck PTT switch it can prevent interference to other users as well as battery depletion
10	R-CTCS - Receiver CTCSS	OFF [0] see CTCSS Table in Appendix C	Mutes the speaker of the transceiver in the absence of a specific and continuous sub-audible signal. If the station you are listening to does not transmit this specific and continuous signal, you will not hear anything.
11	R-DCS - Receiver DCS	OFF [0] see DCS Table in Appendix C	Mutes the speaker of the transceiver in the absence of a specific low-level digital signal. If the station you are listening to does not transmit this specific signal, you will not hear anything.
12	T-CTCS - Transmitter CTCSS	OFF [0] see CTCSS Table in Appendix C	Transmits a specific and continuous sub audible signal to unlock the squelch of a distant receiver (usually a repeater).
13	T-DCS -Transmitter DCS	OFF [0] see DCS Table in Appendix C	Transmits a specific low-level digital signal to unlock the squelch of a distant receiver (usually a repeater).
14	Scan CTCSS	OFF	Allows scanning of CTCSS in VFO frequency mode. This operation is not allowed in channel mode.
15	Scan DCS	OFF	Allows scanning of DCS in VFO frequency mode. This operation is not allowed in channel mode.
16	CDCSS SAVE MODE	ALL[0] RX[1]TX[2]	Save the scanned CTCSS/DCS in VFO mode. •ALL: Save to R-CDCSS and T-CDCSS •TX: Save to T-CDCSS only •RX: Save to R-CDCSS only

17	VOICE - Voice Prompt	OFF [0] ON [1]	Allows audible voice confirmation of a key press
18	LANGUAGE - Language selection	ENGLISH [0] 中文 [1]	Set the language type of menu and prompt voice. •ENGLISH: Display as an English menu with English prompts for operation. •Chinese: Display as a Chinese menu and prompt for operation in Chinese.
19	DTMFST - DTMFST	•OFF [0]: No DTMF Side Tones are heard •DT-ST [1]: Side Tones are heard only from manually keyed DTMF codes •ANI-ST [2]: Side Tones are heard only from automatically keyed DTMF codes •DT+ANI [3]: All DTMF Side Tones are heard	Determines when DTMF Side Tones can be heard from the transceiver speaker.
20	S-CODE - Signal Code	1[0] 2[1] 3[2] 4[3] 5[4] 6[5] 7[6] 8[9] 9[8] 10[9] 11[10] 12[11] 13[12] 14[13] 15[14]	Selects 1 of 15 DTMF codes. The DTMF codes are programmed with software and are up to 5 digits each.
21	SC-REV - Scanner Resume Method	•TO [0]: Time Operation - scanning will resume after a fixed time has passed •CO [1]: Carrier Operation - scanning will resume after the signal disappears •SE [2]: Search Operation - scanning will not resume	Scanning Resume Method
22	PTT-ID - When to send the PTT-ID	•OFF [0]: No ID is sent •BOT [1]: The selected S-CODE is sent at the beginning •EOT [2]: The selected S-CODE is sent at the ending •BOTH [3]: The selected S-CODE is sent at the beginning and ending	When to Send PTT-ID Codes are sent during either the beginning or ending of a transmission.
23	PTT-LT - Signal code sending delay	0[0] 100[1] 200[2] 400[3] 600[4] 800[5] 1000[6]	PTT-ID Delay (milliseconds)

24	MDF-A - Channel Mode A Display	<ul style="list-style-type: none"> •CH [0]: Displays the channel number •NAME [1]: Displays the channel name. •FREQ [2]: Displays programmed Frequency 	[A] MR/Channel Mode Display Format Note: Names must be entered using software.
25	MDF-B - Channel Mode B Display	<ul style="list-style-type: none"> •CH [0]: Displays the channel number •NAME [1]: Displays the channel name. •FREQ [2]: Displays programmed Frequency 	[B] MR/Channel Mode Display Format Note: Names must be entered using software.
26	BCL - Busy Channel Lock-out	OFF [0] ON [1]	Disables the [PTT] key on a channel that is already in use. The transceiver will sound a beep tone and will not transmit if the [PTT] key is pressed when a channel is already in use.
27	AUTOLK – Automatic Keypad Lock	OFF [0] 5 [1] 10 [2] 15 [3]	Set the automatic keyboard lock delay time. To prevent the keyboard from being accidentally triggered. When turned on, if the keyboard is not used within a predetermined delay time, the keyboard will be locked. Pressing the  key for 2 seconds will unlock the keypad.
28	SFT-D - Frequency Shift Direction	<ul style="list-style-type: none"> •OFF [0]: TX = RX (simplex) •+ [1]: TX will be shifted higher in frequency than RX •- [2]: TX will be shifted lower in frequency than RX 	Enables access of repeaters in VFO/Frequency Mode
29	OFFSET - Frequency shift amount	00.000 - 69.990 in 10 kHz steps	Specifies the difference between the TX and RX frequencies
30	MEMCH - Store a Memory Channel	001 - 999	This menu is used to either create new or modify existing channels (001 through 999) so that they can be accessed from MR/Channel Mode.
31	DELCH - Delete a memory channel	001 - 999	This menu is used to delete the programmed information from the specified channel (001 through 999) so that it can either be programmed again or be left empty.

32	AL-MOD - Alarm Mode	<ul style="list-style-type: none"> •SITE [0]: Sounds alarm through your radio speaker only •TONE[1]: Transmits a cycling tone over-the-air •CODE [2]: Transmits '119' (911 in reverse) followed by the ANI code over-the-air 	<ul style="list-style-type: none"> •SITE: Sounds alarm through your radio speaker only •TONE: Transmits a cycling tone over-the air •CODE: Transmits '119' (911 in reverse?) followed by the ANI code over-the-air
33	STE - Squelch Tail Elimination	OFF [0] ON [1]	This function is used eliminate squelch tail noise between BaoFeng handhelds that are communicating directly (no repeater). Reception of a 55 Hz or 134.4 Hz tone burst mutes the audio long enough to prevent hearing any squelch tail noise.
34	RP-STE - Squelch Tail Elimination	OFF [0] 1 - 10	This function is used eliminate squelch tail noise when communicating through a repeater.
35	RPT-RL - Delay the squelch tail of repeater	OFF [0] 1 - 10	Delay the Tail Tone of Repeater (X100 milliseconds)
36	ROGER - Roger Beep	OFF [0] ON [1]	Sends an end-of-transmission tone to indicate to other stations that the transmission has ended.
37	TONE-Tone-burst	1000[0] 1450[1] 1750[2] 2100[3]	To send out a tone-burst; you simultaneously will press a key while holding down the PTT. No further configuration required using this feature.
38	MENU EXIT TIME	5 [0] 10[1] - 60[10] in 5 second steps (TIMEOUT-5)/5=[n]	The time setting for menu exit without menu operation.
39	VOX DELAY	0.5 [0] 0.6[1] -2.0[15] in 0.1 second steps (TIMEOUT-0.1)/0.1=[n]	There's a brief delay between when you finish talking and the radio returns to tx mode; this delay can be adjusted.
40	POWER ON MSG - Power On Message	LOGO[0] VOLTAGE[1]	Welcome message displayed immediately after startup. The LOGO is programmed by the manager.
41	VOICEPRI - Frequency hopping system	OFF [0] ON [1]	Activate the frequency hopping function to prevent interference from outside the group
42	RESET - Restore defaults	VFO [0] ALL [1]	Resets the radio to factory defaults, with some exceptions.

43	POWER ON PWD -Power on password	OFF [0] ON [1]	Activate the radio power-on password. You must enter the correct password to turn on the radio
44	STOP WATCH	ON	Activate the stopwatch function. Press the  key to start timing.
45	VERSION - Version information		Access hardware and firmware information for the radio

Appendix C. - Technical Specifications

General

Frequency Range	GMRS(RX & TX) 136-173.99 & 400-519.99MHz(Scanning RX)
Operation Voltage	DC 7.4 V \pm 10%
Frequency Stability	\pm 2.5ppm
Operating Temperature	-20°C to +50°C
Mode of Operation	Simplex
Antenna Impedance	50ohm

Transmitter Part

RF Output Power	\leq 5W(GMRS)
FM Modulation	11K0F3E@12.5KHz
Adjacent Channel Power	60dB @ 12.5KHz
Transmission current	\leq 1500mA

Receiver Part

Receive Sensitivity	0.25 μ V (12dB SINAD)
Adjacent Channel Selectivity	\geq 55dB@12.5KHz
Inter Modulation and Rejection	\geq 55dB@12.5KHz
Conducted Spurious Emission	\leq -57dB@12.5KHz
Rated Audio Power Output	1W @16 ohms
Receive current	\leq 380mA
Rated Audio Distortion	\leq 5%

NOTE: All specifications may be modified without prior notice or liability. Thank you.

Disclaimer

The Company endeavors to achieve the accuracy and completeness of this manual, but no warranty of accuracy or reliability is given. All the specifications and designs are subject to change without notice due to continuous technological development. No part of this manual may be copied, modified, translated, or distributed in any manner without the prior written consent of the Company.

We do not guarantee, for any particular purpose, the accuracy, validity, timeliness, legitimacy or completeness of the third-party products and contents involved in this manual.



PO FUNG ELECTRONIC (HK) INTERNATIONAL GROUP COMPANY LIMITED

ADD: Room 1508, 15/F, Office Tower II, Grand Plaza, 625 Nathan Road, Kowloon, Hong Kong

[Http://www.baofengradio.com](http://www.baofengradio.com)

Print version: GM-5RH_V1.0