51.7MM

72.3MM

MOES SMART HOME SMART WORK WORK

works with Tuya

# Instruction Manual
# Smart Switch Module
## WiFi 3 Gang
## MS-104C



English

WORKS WITH alexa

WORKS WITH Google Assistant

WM-104C-MS-DG10

- Bitte scannen Sie den QR-Code, um das deutsche Handbuch, das Installationsvideo und die Funktionseinführung zu erhalten
- Escanee el código QR para obtener el manual en español, el video de instalación y la introducción de la función
- Veuillez scanner le code QR pour obtenir le manuel en français, la vidéo d'installation et l'introduction des fonctions
- Отсканируйте QR-код, чтобы получить руководство на русском языке, видео по установке и описание функций
- Scansionare il codice QR per ottenere il manuale in italiano, il video di installazione e la guida alle funzionalita. Video di installazione e funzionalita
- Leia o código QR para obter o manual em português, o vídeo de instalação e a introdução das funções
- Zeskanuj kod QR, aby uzyskać instrukcje, filmy instalacyjne i funkcje
- QR コードをスキャンして、日本語のマニュアル、インストールビデオ、機能紹介を入手してください
- QR 코드를 스캔하면 한국어 설명서, 설치 동영상, 기능 가이드를 볼수 있습니다
- من فضلك قم بمسح رمز الاستجابة السريعة(QR-code)للحصول على دليل المستخدم باللغة العربية وفيديو التثبيت ووصف الوظائف

请扫描二维码获取中文的说明书、安装视频及功能介绍

English 2

Global international operation Whenever & Wherever You are,All-in-one Mobile App




Inhouse local operation




(Note:Chosen from App as rocker switch default)

English 3




## Step 1

- Turn off the circuit breaker and use the electrical tester to test the power.
- Ensure the circuit breaker is off before wiring.

**Attention:**
Please disconnect the power supply before installing or removing the device for avoiding irreversible damage on the device from the electric current or some unpredictable problems such as lamp flashing.

English 4

## Step 2

- Remove the old switch



English 5

## Step 3

- Remove the switch and pull it away from the wall. Identify Line/Load Wire(Note:The color of your wire may be different from the color shown on the manual.)

**Verify power is off**
- We recommend you remove the faceplate from the old switch and use an electrical tester to test all wires connected to the switch to ensure there is no voltage in the circuit.
- You may need to turn off more than one circuit breaker.

## Installation

Warnings:

1. Installation must be carried out by a qualified electrician in accordance with local regulations.
2. Keep the device out of the reach of children.
3. Keep the device away from water , damp or hot environment.
4. Install the device away from strong signal sources such as microwave oven that may cause signal interruption resulted in abnormal operation of the device.
5. Obstruction by concrete wall or metallic materials may reduce the effective operation range of the device and should be avoided.
6. Do NOT attempt to disassemble, repair or modify the device.

English 6




## Product description

WiFi Smart Switch Module device is a convenient and easy-to-use and powerful smart home device. It uses WiFi communication technology to realize remote control and intelligent transformation of home equipment through mobile phone App or voice control. The WiFi smart breaker can be easily connected to the original switches, sockets, lamps, electrical appliances and other lines at home, and realize the intelligent control of these devices through the on/off of the control circuit.

## Package list

Smart Switch Module*1 User Manual *1 Bracket *1

English 7

## Technical specifications

| | |
|---|---|
| Product type | 3 Gang Smart Switch Module |
| Voltage | 90-250V AC 50/60Hz |
| Current | Total 10A |
| WiFi frequency | 2.4GHz WiFi |
| Operation temp. | -10℃ - +40℃ |
| Case temp. | Tc: +80℃ (Max.) |
| Operation range | < 200 m |
| Dims (WxDxH) | 52x47x22.5 mm |
| IP rating | IP20 |
| Frequency Band | 2.412~2.484GHz |
| Maximum Radio Transmit Power | < +16dBm |

## Wiring diagram

1. With one 3 Gang switch




English 8

2. With 3 Gang 2 Way switches




3. With Wall Socket(3 sockets available)




English 9

Wiring Instructions and Diagrams

1. Turn off the power supply before carrying out any electrical installation work.

2. Connect wires according to the wiring diagram.

3. Insert the module into the junction box.

4. Connect the power supply and follow switch module configuration instructions.

**Note:** Put your smartphone close to the switch module when you're configuring, and make sure you have min. 50% Wi-Fi signal.

English 10

## FAQ

Q1: What should I do if I can't configure the switch module?
a. Please check whether device is powered on.
b. Make sure your mobile and switch module are under the same 2.4 GHz WiFi network.
c. Whether it's in good internet conditions.
d. Make sure the password entered in App is correct.
e. Make sure the wiring is correct.
Q2: What device can be connected to this WiFi switch module?
Most of your household electrical appliances can be, such as lamps, laundry machine, coffe maker, etc.
And only rocker light switch,touch switch and socket can be connected to the switch module.
Q3: What happens if the WiFi goes off?
You can still control the device connected the switch module with your traditional switch and once WiFi is active again the device connected to module will connect automatically to your WiFi network.
Q4: What should I do if I change the WiFi network or change the password?
You have to re-connect our WiFi switch module to the new WiFi network according to the App User Manual.
Q5: How do I reset the device?
Press the rocker light switch ON/OFF cycle for 5 times until the beeper on the module sounds continuously. (Confirm your light is on to operate)

English 11

## Preparation for use

**1.Download MOES App on App store or scan the QR code**

GET IT ON Google play

Download on the App Store

MOES App is upgraded as much more compatibility than Tuya Smart/Smart Life App, functional well for scene controlled by Siri, widget and scene recommendations as the fully new customized service.
(Note: Tuya Smart/Smart Life App still works, but MOES App is highly recommended)

**2.Registration or Log in.**

- Download "MOES" Application.
- Enter the Register/Login interface; tap "Register" to create an account by entering your phone number to get verification code and "Set password". Choose "Log in" if you already have a MOES account.

English 12

**3.1 Method one:**
Scan the QR code to configure the network guide.

(1) (2)

Scan the QR code

Please connect the device according to the configuration process.

English 13




**How to reset Wi-Fi code**

a. For rocker light switch: press the switch button for 20 times (ON/OFF cycle for 10 times) until the beep sounds continuously and rapidly as Di-Di-Di... for pairing and reset mode.
b. For reset light switch: press the switch button for 10 times until the beep sounds continuously and rapidly as Di-Di-Di... for pairing and reset mode.
c. For switch module: long press the reset button on the module until you hear the beep sounds continuously and rapidly as Di-Di-Di...

**Note:** This WiFi switch module fits for rocker light switch only.

English 14

**Wi-Fi link method:(two pairing methods)**
Complete the wiring of the switch module before pairing

**3.2 Method one:**
Pair and clear up the WiFi code with Bluetooth and WiFi connected meantime.(New Updated)

1.Make sure your phone is connected to Wi-Fi and Bluetooth.

2.Open Smart Life/Tuya App and Click"+",then the prompt page will automatically show on the screen.Click "Add".

English 15

3.Select the device you want to add and click "+"

English 16

4.Enter Wi-Fi Password and click "Next",waiting for completing the connection.

5.Add the device successfully, you can edit the name of the device to enter the device page by click "Done"

English 17

## 3.3 Method two:

Pair with traditional pairing method.

1.Open the App, select "+" on top right and choose "Switch (Wi-Fi)" to add device.

English 18




2.Make sure your smart phone and WiFi switch module are under the same WiFi network at 2.4 GHz connection.Confirm when the switch module beeping rapidly.

English 19

3.The connecting will take about 10-120 seconds to complete depending on your network condition.

4.When pairing is done, the switch will be shown on the App.

English 20

**How to achieve multi-control association**
Note:Please confirm you have successfully finished the WiFi link method above for adding this switch to your Smart Life App before the association.

1.WiFi add another smart switch to the same Smart Life/Tuya App.(If there is a smart switch having been added before to the app,just go to next step.)
Note:There is no need to wire the new added switch to the light,only L and N are required for wiring.

2.Then you will see two devices in the app and click the main switch(as One gang switch as below) by entering into the next operation.




Main Switch New Added Switch

English 21

3.Click in the upper right corner and choose"Multi-Control Association, and then click "+" in the right corner




4.Choose the switch that you want to associate to and then choose the switch button that you want to control the same light.

English 22

5.Then go back to previous page,you will see two items in the page,one is your main switch,the other is the one you associate just now.
Note:Please confirm the associated switch is enabled.




6.Now you are able to control your light with two switches.Do not associate another button in the same switch for multi-control.

English 23

7.If you want to add another third or more smart switches to control your light,just repeat the steps above.And you will see the result as below when you associate another new switch.

English 24

## Control your home with your voice

Devices are compatible with Amazon Alexa and Google Home supported functionalities.
Please see our step-by-step guide on:
https://www.moestech.com/blogs/news/smart-device-linked-voice-speaker

## Declaration of conformity

Hereby,WENZHOU NOVA NEW ENERGY CO.,LTD declares that the radio equipment type WM-104C is in compliance with Directive2014/53/EU,2014/35/EU, 2014/30/EU, 2011/65/EU. The full text of the EU declaration of conformity is available at the following internet address: https://www.moestech.com/blogs/news/wm-104c

## WARRANTY INSTRUCTIONS

Dear Sir or Madam, thank you for purchasing the product.
We hope you'll enjoy using it.
The warranty for the products in the warranty card is hereby granted as follows.
As a condition of using the warranty, you must comply with the following terms and procedures:
1. Products are covered by a 24-month warranty, effective from the date of purchase of the covered product by a retail customer.
2. In order to exercise warranty rights, the purchaser must present: a) Warranty card, b) Proof of purchase (VAT invoice, financial receipt or other document confirming the actual date of purchase), unless the purchase date of the product comes from the warranty card.
3. If product quality problems occur within 24 months from the date of receipt, please prepare the product and packaging and go to the place or store where you purchased it to apply for after-sales maintenance. If the product is damaged due to personal reasons, a certain maintenance fee will be charged.
4. We recommend that you properly protect the goods when delivering them to the guarantor - for this purpose, we recommend that you use the original packaging with padding to ensure safe transportation. If you choose to use replacement packaging, we recommend that you ensure that the product is adequately protected from damage during shipping. We recommend that you place an appropriate sticker on your packaging indicating the product's susceptibility to impact, such as "Warning Glass".
5. Reported defects covered by the warranty will be considered immediately and no later than 14 days from the date of delivery of the goods to the Guarantor.
6. After checking and determining the legality of the warranty claim, the Guarantor's services will repair the product within a reasonable time, not exceeding 30 days from the date of delivery of the goods to the Guarantor. However, if hard-to-find spare parts are required, this deadline may extend the time it takes to deliver the part from the manufacturer's factory.
7. The warranty does not include the performance of maintenance and similar operations specified in the user manual, and users are obliged to do it themselves.
8. If defects occur due to natural wear and tear during use, the warranty does not cover it.
9. The warranty does not cover:
a) Mechanical damage caused by the user's fault and product defects caused by such damage.
b) Damage caused by improper use of the product.
10. The rights under the guarantee will expire in the following circumstances:
a) Remove the warranty seal from the product.
b) Remove the serial number from the product.
c) Take action to eliminate physical defects in the product outside of authorized service.
d) Use non-original parts and consumables.

English 25

## RECYCLING INFORMATION

All products marked with the symbol for separate collection of waste electrical and electronic equipment (WEEE Directive 2012/19 / EU) must be disposed of separately from unsorted municipal waste. To protect your health and the environment, this equipment must be disposed of at designated collection points for electrical and electronic equipment designated by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences for the environment and human health. To find out where these collection points are and how they work, contact the installer or your local authority.

Ce appareil, ses accessoires, se recyclent

À DÉPOSER EN MAGASIN OU À DÉPOSER EN DÉCHÈTERIE

English 26

## WARRANTY CARD

**Product Information**
Product Name_____
Product Type_____
Purchase Date_____
Warranty Period_____
Dealer Information_____
Customer's Name_____
Customer Phone_____
Customer Address_____
_____

**Maintenance Records**

| Failure date | Cause Of Issue | Fault Content | Principal |
|---|---|---|---|
| | | | |
| | | | |
| | | | |
| | | | |


E-CrossStu-GmbH
Mainzer Landstr. 69 ,60329 Frankfurt am Main
Email: E-crossstu@web.de
Tel: +4969332967674
Made in China

EVATOST CONSULTING LTD
Address: Suite 11, First Floor, Moy Road Business Centre, Taffs Well, Cardiff, Wales, CF15 7QR
Tel:+442921680945
Email:contact@evatmaster.com

Manufacturer:
WENZHOU NOVA NEW ENERGY CO.,LTD
Address: Power Science and Technology Innovation Center, NO.238, Wei 11 Road, Yueqing Economic Development Zone, Yueqing, Zhejiang, China
Tel: +86-577-57188615
After-sale Service:
service@moeshouse.com


English 27

Thank you for your support and purchase at we Moes, we are always here for your complete satisfaction, just feel free to share your great shopping experience with us.

★★★★★

If you have any other need, please do not hesitate to contact us first, we will try to meet your demand.

FOLLOW US

@moessmart MOES.Official www.moes.net
@moes_smart @moes_smart @moes_smart

English 28

# Gebrauchsanweisung (Deutsch)

## Schritt 1

- Schalten Sie den Leistungsschalter aus und verwenden Sie den elektrischen Tester, um die Leistung zu testen.
- Stellen Sie sicher, dass der Leistungsschalter vor der Verkabelung ausgeschaltet ist.




**Achtung:**
Bitte trennen Sie das Netzteil, bevor Sie das Gerät installieren oder entfernen, um irreversible Schäden am Gerät durch den elektrischen Strom oder unvorhersehbare Probleme wie das Blinken der Lampe zu vermeiden.

Deutsch 31

## Schritt 2

- Entfernen Sie den alten Schalter

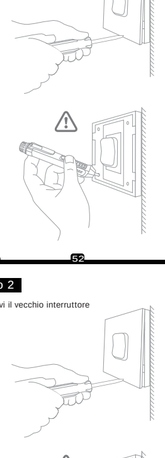

Deutsch 32

## Schritt 3

- Entfernen Sie den Schalter und ziehen Sie ihn von der Wand weg.Identifizieren Sie Line/Load Wire (Hinweis: Die Farbe Ihres Drahtes kann von der Farbe im Handbuch abweichen.)

**Überprüfen Sie, ob die Stromversorgung ausgeschaltet ist**
- Wir empfehlen Ihnen, die Frontplatte vom alten Schalter zu entfernen und eine elektrische Tester, um alle Kabel zu testen, die mit dem Schalter verbunden sind, um sicherzustellen, dass es keine Spannung in der Schaltung gibt.
- Möglicherweise müssen Sie mehr als einen Leistungsschalter ausschalten.

## Installation

Warnungen:

1. Die Installation muss von einem qualifizierten Elektriker gemäß den örtlichen Vorschriften durchgeführt werden.
2. Bewahren Sie das Gerät außerhalb der Reichweite von Kindern auf.
3. Halten Sie das Gerät von Wasser und feuchter oder heißer Umgebung fern.
4. Installieren Sie das Gerät weg von starken Signalquellen wie Mikrowellenherd, die zu einer Signalunterbrechung führen können, die zu einer anormalen Funktion des Geräts führen kann.
5. Hindernisse durch Betonwände oder metallische Materialien können den Wirkungsbereich des Geräts verringern und sollten vermieden werden.
6. Versuchen Sie NICHT, das Gerät zu zerlegen, zu reparieren oder zu modifizieren.

Deutsch 33




## Produktbeschreibung

WiFi Smart Switch Module Gerät ist ein bequemes und einfach zu bedienendes und leistungsstarkes Smart Home Gerät. Es verwendet WiFi-Kommunikationstechnologie, um Fernbedienung und intelligente Transformation von Heimgeräten durch Handy-App oder Sprachsteuerung zu realisieren. Der WiFi Smart Breaker kann einfach mit den ursprünglichen Schaltern, Steckdosen, Lampen, Elektrogeräten und anderen Leitungen zu Hause verbunden werden und die intelligente Steuerung dieser Geräte durch das Ein/Aus des Steuerkreises realisieren.

## Paketliste

Smart Switch Modul*1 Bedienungsanleitung *1 Halterung *1

Deutsch 34

## Technische Daten

| | |
|---|---|
| Produktart | 3 Gang smart switch modul |
| Spannung | 90-250V AC 50/60Hz |
| Aktuell | Total 10A |
| WiFi frequenz | 2.4GHz WiFi |
| Operation temp. | -10℃ - +40℃ |
| Fallzeit | Tc: +80℃ (Max.) |
| Betriebsbereich | < 200 m |
| Dims (WxDxH) | 52x47x22.5 mm |
| IP rating | IP20 |
| Frequenzband | 2.412~2.484GHz |
| Maximum funk sendeleistung | < +16dBm |

## Schaltplan

1. Mit einem 3-Gang Schalter




Deutsch 35

2. Mit 3 Gang 2 Way Schalter




3. Mit Wandsteckdose(3 Steckdosen verfügbar)

Deutsch 36

## Zubereitung zur Anwendung

**1.Laden Sie die MOES App im App Store herunter oder QR-Code scannen**

GET IT ON Google play

Download on the App Store

Die MOES App wurde um einiges mehr Kompatibilität erweitert als die Tuya Smart/Smart Life App. Sie funktioniert gut für Szenen, die von Siri gesteuert werden, Widget und Szenenempfehlungen als der völlig neue benutzerdefinierte Service.
(Hinweis: Tuya Smart/Smart Life App funktioniert immer noch, aber MOES App wird dringend empfohlen)

**2.Registrierung oder Login.**

- Download "MOES" Anwendung.
- Geben Sie die Register/Login-Schnittstelle ein; Tippen Sie auf "Registrieren", um ein Konto zu erstellen, indem Sie Ihre Telefonnummer eingeben, um den Bestätigungscode zu erhalten und "Passwort festlegen". Wählen Sie "Anmelden", wenn Sie bereits ein MOES-Konto haben.

Deutsch 37

**3.1 Methode eins:**
Scannen Sie den QR-Code, um den Netzwerkführer zu konfigurieren.

(1) (2)

Scannen Sie den QR-Code




Bitte verbinden Sie das Gerät entsprechend dem Konfigurationsvorgang.

Deutsch 38




## Konformitätserklärung

WENZHOU NOVA NEW ENERGY CO., LTD erklärt hiermit, dass die Funkgeräte Typ WM-104C in Übereinstimmung mit der Richtlinie 2014/53/EU,2014/35/EU, 2014/30/EU, 2011/65/EU sind. Der vollständige Wortlaut der EU-Konformitätserklärung ist unter folgender Internetadresse abrufbar:
https://www.moestech.com/blogs/news/wm-104c

Deutsch 39

## Gewährleistungen

Sehr geehrte Damen und Herren, vielen Dank für Ihren Kauf.
Wir hoffen, Sie genießen es.
Die Garantie für die Produkte in der Garantiekarte wird hiermit wie folgt gewährt.
Als Bedingung für die inanspruchnahme der Garantie müssen Sie die folgenden Bedingungen und Verfahren einhalten:
1. Produkte sind von einer 24-monatigen Garantie abgedeckt, die ab dem Datum des Kaufs des abgedeckten Produkts durch einen Einzelhandelskunden gültig ist.
2. Um Garantierechte auszuüben, muss der Käufer Folgendes vorlegen: a) Garantiekarte, b) Kaufnachweis (Mehrwertsteuerrechnung, Finanzbeleg oder anderes Dokument, das das tatsächliche Kaufdatum bestätigt), es sei denn, das Kaufdatum des Produkts stammt von der Garantiekarte.
3. Wenn Produktqualitätsprobleme innerhalb von 24 Monaten nach Erhalt auftreten, bereiten Sie das Produkt und die Verpackung vor und gehen Sie zum Ort oder Geschäft, in dem Sie es gekauft haben, um eine After-Sales-Wartung zu beantragen. Wenn das Produkt aus persönlichen Gründen beschädigt wird, wird eine bestimmte Wartungsgebühr berechnet.
4. Die Garantie erstreckt sich nicht auf:
a) Mechanische Schäden durch Verschulden des Benutzers und Produktmängel durch solche Schäden.
b) Schäden, die durch unsachgemäße Verwendung des Produkts verursacht werden.

Deutsch 40

# Manual de instrucciones (Español)

## Paso 1

- Apague el disyuntor y luego pruebe la fuente de alimentación con un probador eléctrico.
- Asegúrese de que el disyuntor esté cerrado antes de conectar el cable.




**Atención:**
Desconecte la fuente de alimentación antes de instalar o desmontar el equipo para evitar daños irreversibles al equipo por la corriente eléctrica o por algunos problemas impredecibles, como el parpadeo de las luces.

Español 41

## Paso 2

- Quitar el interruptor antiguo



Español 42

## Paso 3

- Quite el interruptor y sácalo de la pared. Ldentify Line / load Wire
(Nota: color del cable Puede ser diferente de los colores que se muestran en el manual.)

**Verificar si la fuente de alimentación está apagada**
- Le recomendamos que retire el panel del interruptor antiguo y use electricidad El probador prueba todos los cables conectados al interruptor para asegurarse de que no hay tensión en el circuito.
- Es posible que necesite apagar varios disyuntores.

## Instalación

Advertencia:

1. Debe ser instalado por un electricista calificado De acuerdo con las regulaciones locales.
2. Coloque el equipo fuera del alcance de los niños.
3. Mantenga el equipo alejado del agua, los ambientes húmedos o calurosos.
4. Instalar el dispositivo lejos de una fuente de señal fuerte, como un microondas, puede provocar una interrupción de la señal, lo que puede provocar que el dispositivo funcione anormalmente.
5. Las obstrucciones de paredes de hormigón o materiales metálicos pueden reducir el alcance efectivo del funcionamiento del equipo y deben evitarse.
6. No intente desmontar, reparar o modificar el equipo.

Español 43




## Descripción del producto

El dispositivo de módulo de interruptor inteligente WiFi es un dispositivo de hogar inteligente conveniente, fácil de usar y potente. Utiliza la tecnología de comunicación WiFi para realizar el control remoto y la transformación inteligente de los dispositivos domésticos a través de la aplicación móvil o el control de voz. El disyuntor inteligente WiFi se puede conectar fácilmente a los interruptores originales, enchufes, lámparas, electrodomésticos y otras líneas en casa, y el control inteligente de estos dispositivos se realiza a través del interruptor del Circuito de control.

## Lista de paquetes

Módulo de conmutación inteligente*1 Manual del usuario *1
Stent *1

Español 44

## Especificaciones técnicas

| | |
|---|---|
| Tipo de producto | 3 Gang módulo de conmutación inteligente |
| Tensión | 90-250V AC 50/60Hz |
| Ahora | Total 10A |
| WiFi frecuencia | 2.4GHz WiFi |
| Temperatura de operación. | -10℃ - +40℃ |
| Temperatura de la carcasa. | Tc: +80℃ (Max.) |
| Alcance de la operación | < 200 m |
| Dims (WxDxH) | 52x47x22.5 mm |
| IP calificación | IP20 |
| Banda de frecuencia | 2.412~2.484GHz |
| Radio máxima potencia de transmisión | < +16dBm |

## Mapa de cableado

1. Con un interruptor de 3 grupos




Español 45

2. Con 3 grupos de interruptores bidireccionales




3. Enchufe de pared (se pueden proporcionar 3 enchufes)




Español 46

## Preparación para el uso

**1.Descargar la aplicación MOES en la tienda de aplicaciones o escaneo de códigos QR**

GET IT ON Google play

Download on the App Store

La actualización de la aplicación MOES es más compatible que la aplicación touya Smart / Smart Life, y como un nuevo servicio personalizado, se puede utilizar bien para escenarios, gadgets y recomendaciones de escenarios controlados por siri.
(Nota: la aplicación tuya Smart / Smart Life sigue siendo válida, pero se recomienda encarecidamente la aplicación MOES)

**2.Registrarse o iniciar sesión.**

- Descargar la aplicación "MOES".
- Entrar en la interfaz de registro / inicio de sesión; Haga clic en "registrarse" para crear una cuenta introduciendo su número de teléfono para obtener el Código de verificación y "configurar la contraseña". Si ya tiene una cuenta MOES, elija "iniciar sesión".

Español 47

**3.1 Método uno:**
Escanee el Código QR para configurar la Guía de red.



(1) (2)

Escaneo de códigos QR




Siga el proceso de configuración para conectar el dispositivo.

Español 48




## Declaración de conformidad

WENZHOU NOVARTIS NEW ENERGY CO., LTD declara aquí que los equipos de radio WM - 104C cumplen con las directivas 2014 / 53 / UE, 2014 / 35 / UE, 2014 / 30 / UE, 2011 / 65 / UE. El texto completo de la Declaración de coherencia de la UE se puede obtener en el siguiente sitio web:
https://www.moestech.com/blogs/news/wm-104c

Español 49

## Instrucciones de garantía

Estimado Señor o señora, gracias por comprar el producto.
Esperamos que le guste usarlo.
Se otorga la siguiente garantía a los productos en la tarjeta de garantía.
Como condición para el uso de la garantía, debe cumplir con los siguientes términos y procedimientos:
1. El producto goza de una garantía de 24 meses, que entrará en vigor a partir de la fecha en que el cliente minorista compre el producto cubierto.
2. Para ejercer la garantía, el comprador debe presentar: a) la tarjeta de garantía, b) el certificado de compra (factura de iva, recibo financiero u otro documento que confirme la fecha real de compra), a menos que la fecha de compra del producto provenga de la tarjeta de garantía.
3. Dentro de los 24 meses siguientes a la fecha de recepción del producto, si hay problemas de calidad del producto, prepare el producto y el embalaje y vaya al lugar de compra o tienda para solicitar el mantenimiento post-venta. Si el producto se daña por razones personales, se cobrará una cierta tarifa de mantenimiento.
4. La garantía no incluye:
a) Los daños mecánicos causados por la negligencia del usuario y los defectos resultantes del producto.
b) Daños causados por el uso inadecuado del producto.

Español 50

# Manuel d'instruction (Français)

## Étapes 1

- Éteignez le disjoncteur, puis utilisez un testeur électrique pour tester l'alimentation.
- Assurez - vous que le disjoncteur est fermé avant le câblage.




**Attention:**
Débranchez l'alimentation avant d'installer ou de démonter l'appareil pour éviter que le courant ou certains problèmes imprévisibles, tels que le clignotement des lumières, ne causent des dommages irréversibles à l'appareil.

Français 51

## Étapes 2

- Retirer l'ancien interrupteur



Français 52

## Étapes 3

- Retirez l'interrupteur et retirez – le du mur. Identifiez le fil de ligne / de charge (Remarque: la couleur du fil peut différer de celle indiquée sur le manuel.)

**Vérifiez que l'alimentation est éteinte**
- Nous vous recommandons de retirer le panneau de l'ancien interrupteur et d'utiliser l'électricité Le testeur teste tous les fils connectés à l'interrupteur pour s'assurer qu'il n'y a pas de tension dans le circuit.
- Vous devrez peut - être éteindre plusieurs disjoncteurs.

## Installation

Avertissement:

1. L'installation doit être effectuée par un électricien qualifié conformément à la réglementation locale.
2. Gardez l'appareil hors de la portée des enfants.
3. Gardez l'appareil loin de l'eau, de l'humidité ou des environnements chauds.
4. Installez l'appareil loin d'une source de signal forte, comme un four à micro - ondes, ce qui peut entraîner une interruption du signal, ce qui peut entraîner un fonctionnement anormal de l'appareil.
5. L'obstruction de murs en béton ou de matériaux métalliques peut réduire la plage de fonctionnement efficace de l'appareil et doit être évitée.
6. N'essayez pas de démonter, de réparer ou de modifier l'équipement.

Français 53




## Description du produit

Wifi Smart Switch Module Device est un appareil de maison intelligente pratique et facile à utiliser et puissant. Il utilise la technologie de communication wifi pour le contrôle à distance et la transformation intelligente des appareils domestiques via une application de téléphone mobile ou une commande vocale. Le disjoncteur intelligent wifi peut être facilement connecté aux interrupteurs, prises, Lampes, appareils électriques et autres lignes d'origine dans votre maison et permet un contrôle intelligent de ces appareils via des interrupteurs q