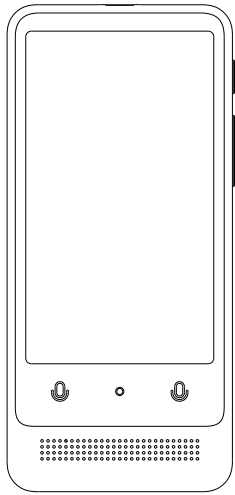
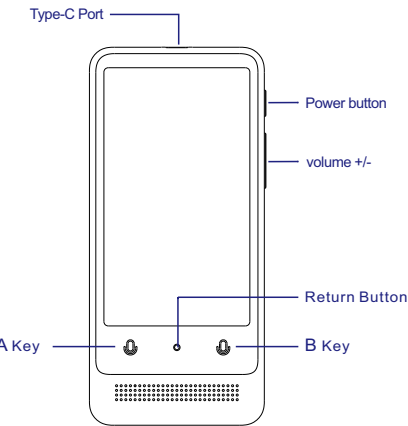


<div>智能翻译机</div> <div></div> <div>用户使用手册</div>	<div>主按键说明：</div> <div></div> <div>上滑动屏幕解锁</div> <div>A键B键：对应显示界面的左侧&右侧翻译语言</div> <div>返回键：短按返回上个操作</div> <div>电源键：短按锁屏\唤醒屏幕， 长按关机\开机</div> <div>音量键：上下调节音量+-</div> <div>Type-C插孔：链接Type-C数据线\充电</div>	<div>快速操作指南：</div> <div>首先非常感谢您使用本公司产品！</div> <div>本设备支持无线网络联网方式，请您根据当前实际使用环境选择联网方式</div> <div>无线网络环境</div> <div><ul style="list-style-type: none">需要在设备开机后，连接无线网络通过菜单“设置”-“WIFI”进行无线网络的配置。打开无线网络开关。选择需要连接的无线网络，输入密码进行连接。</div> <div>设备充电</div> <div><ul style="list-style-type: none">在电量不足的状态下，可能无法使用设备的部分功能。电池电量低于3.4V时设备自动关机。此时需要给设备充电才能继续使用。开机状态下给设备充电时，屏幕右上角电池图标有“闪电”标志。充电完成后显示满载电池电量图标。</div> <div>设备开机和关机</div> <div><ul style="list-style-type: none">开机：长按设备左侧电源键，直至屏幕显示开机画面。设备初始化需要一定的时间，请耐心等待。关机：长按设备左侧电源键，弹出对话框，点选关机选项即可关闭设备。</div> <div>开启和关闭屏幕</div> <div><p>手动关闭或开启屏幕：</p><ul style="list-style-type: none">亮屏时短按左侧电源键即可关闭屏幕。灭屏时短按左侧电源键即可点亮屏幕。<p>自动关闭屏幕：</p><ul style="list-style-type: none">在系统设置的休眠时间内对设备无任何操作时，设备将自动关闭屏幕显示。短按电源键即可点亮屏幕。</div> <div>主屏幕</div> <div><ul style="list-style-type: none">设备的主屏幕为该设备的主要功能入口，共有18个操作选项：语音翻译、离线翻译、拍照翻译、同声传译、速聊畅译、远程翻译、输入翻译、智能录音、跟读、收藏、CHATGPT、AI助手、汇率换算、单位换算、离线包管理、计算器、秒表、设置。点击后进入相应的功能</div>	<div>状态栏</div> <div><ul style="list-style-type: none">设备屏幕顶部显示有关设备的一些状态信息，如WIFI网络状态、电量、蓝牙、等状态信息。</div> <div>主要功能介绍：</div> <div>语音识别</div> <div><ul style="list-style-type: none">长按设备上的语音输入按钮(A语音按钮对应首页左侧语言，B语音按钮对应首页右侧语言)进入语音识别状态。松手后语音自动识别解析，同时自动翻译成所设置的目标语言并语音播报(语音播报模式根据设置而定)。列表显示出语音翻译的文本记录，翻译记录过多时上下滑动页面可查看翻译记录翻译机处于离线状态，翻译自动切换成离线翻译。翻译首页顶部点击语言按钮进入语言选择列表。点选所需要的源语言\目标语言选项即可。</div> <div>语音翻译</div> <div><ul style="list-style-type: none">目前支持138个国家(地区)语言间的实时互译(随着版本更新会有变化)。翻译首页顶部点击语言按钮进入语言选择列表。点选所需要的源语言\目标语言选项即可。</div> <div>离线翻译</div> <div><ul style="list-style-type: none">目前支持17个国家(地区)语言间的实时互译(随着版本更新会有变化)。先要离线包下载，在有网络情况下进行初始化。使用方法与在线翻译相同。</div> <div>拍照翻译</div> <div><p>语言选择：</p><ul style="list-style-type: none">拍照翻译首页顶部点击语言按钮进入语言选择列表.点选所需要的源语言\目标语言选项即可。<p>拍照翻译：</p><ul style="list-style-type: none">对着需要翻译的图文点击屏幕进行对焦，调整识别范围进行选择，识别后显示翻译结果。</div> <div>同声传译</div> <div><p>需要在有网络情况下进行：</p><ul style="list-style-type: none">支持1分钟内超快AI翻译。</div>	<div><ul style="list-style-type: none">按住A键或者B键进行语音识别即可。退出后需要重新扫码进行翻译。支持浏览器/聊天应用扫码，手机端同步显示内容，并下载保存用于数据编辑。</div> <div>速聊畅译</div> <div><ul style="list-style-type: none">加入多人互聊：◆主动创建多人互聊[前提条件：设备未加入任何互聊]。• 进入后分享二维码或ID号给其他人进行组建群聊，或者扫码进入群聊。• 扫码或者输入设备号添加组员。</div> <div>◆成员管理：</div> <div><ul style="list-style-type: none">点击右上角按钮,选择成员管理选项点击退出互译,可以退出多人互译点击成员列表右侧的X号,可以实现成员管理</div> <div>◆语言选择：</div> <div><ul style="list-style-type: none">右上角点选语言选项，选择你所需语言即可。</div> <div>◆高级设置：</div> <div><ul style="list-style-type: none">点击右上角按钮,选择语言选择选项</div> <div>远程翻译</div> <div><p>需要在有网络情况下进行：</p><ul style="list-style-type: none">支持多人（上限3000）浏览器/聊天应用扫码。扫码进入聊天界面选择需要的语言选项。退出后需要重新扫码进行翻译。</div> <div>输入翻译</div> <div><ul style="list-style-type: none">内置谷歌输入法；点击下载安装所需语音的键盘；点击空白区域输入文字，同步出现所需译文。</div> <div>智能录音</div> <div><ul style="list-style-type: none">目标语言仅支持离线翻译语种，时长60分钟。右上角选择语言目标语种，翻译语种。点击左下角语言切换图标查看原文\译文。录音过程中点击红色停止图标，选择保存文件。点击右上角按钮，可以调入录音文件查看。录音文字保存位置：插入电脑——点选Recording Translation文件夹。</div> <div>设置</div>	<div><ul style="list-style-type: none">WIFI设置：配置设备的WIFI网络。播报模式：可供选择自动播报和手动播报模式，选手动播报模式时翻译结果则需要手动点击才能语音。系统语言：进入选择设备使用的语言界面蓝牙：配置连接蓝牙设备。显示：进入后可以设置休眠时间,可以选择30s,1分钟,3分钟,永不灭屏4种方式。日期和时间：自动设置和手动设置时间两种方式。清空数据：将设备恢复到原始状态(删除设备上的用户数据，操作不可逆)。关于设备：查看当前使用的设备名称、版本号、版权等信息。</div> <div>实用小工具</div> <div><ul style="list-style-type: none">以下为实用工具，包含学习，计算等；跟读、收藏、CHATGPT（需自行缴费）、AI助手（仅限中国地区）、汇率换算、单位换算、离线包管理、计算器、秒表。</div> <div>在线升级</div> <div><p>当有新版本升级时，用户使用过程中切换语言/重启时或者24小时后会自动检测新版本，支持各种网络环境升级。</p></div>
---	--	---	--	---	---

<div>Smart Translator Device</div> <div></div> <div>User Manual</div>	<div>Translator Device Overview</div> <div></div> <div>Swipe up the screen to unlock</div> <div>A key and B key: correspond to the left & right translation languages of the display interface</div> <div>Return key: Short press to return to the previous operation</div> <div>power button: short press to lock the screen\wake up the screen</div> <div>volume +/-: Adjust the volume up and down+/-</div> <div>Type-c port: Connecting Type-c cable\charging</div>	<div>Quick operate Guide：</div> <div>First of all thank you for using our products!</div> <div>This device supports WIFI, please choose the WIFI according to the current actual use environment.</div> <div>WIRELESS NETWORK ENVIRONMENT</div> <div><ul style="list-style-type: none">After the device is powered on, connect to the wireless networkConfigure the wireless network through the menu "Settings" - "WIFI". Turn on the wireless network.Select the wireless network you want to connect to and enter your password to connect.</div> <div>DEVICE CHARGING</div> <div><ul style="list-style-type: none">In a state of low power, some functions of the device may not be available. The device automatically shuts down when the battery level is lower than 3.4V.At this time, you need to charge the device to continue to use.When charging the device while it is turned on, the battery icon in the upper right corner of the screen has a "lightning" symbol.</div> <div>DEVICE POWER ON AND OFF</div> <div><ul style="list-style-type: none">Power on: Long press the power button on the left side of the device until the screen displays the power on screen. Device initialization takes some time, please be patient.Shutdown: Long press the power button on the left side of the device to bring up a dialog box. Click on the shutdown option to turn off the device.</div> <div>TURN ON AND OFF THE SCREEN</div> <div><ul style="list-style-type: none">Manually turn off or on the screen:Press the power button on the left side to turn off the screen.When the screen is off, press the power button on the left to light up the screenAutomatically close the screen:When there is no operation on the device within the sleep time set by the system, the device will automatically turn off the screen display.Short press the power button to light up the screen.</div> <div>HOME SCREEN</div> <div><ul style="list-style-type: none">The main screen of the device is the main function entrance, with a total of 18 operation options: voice translation, offline translation, photo translation, simultaneous interpretation, quick chat translation, remote translation, input translation, intelligent recording, reading, bookmarking, CHATGPT, AI assistant, exchange rate conversion, unit conversion, offline package management, calculator, stopwatch, and settings.Click to enter the corresponding function</div>	<div>STATUS BAR</div> <div>The top of the device screen displays some status information about the device, such as WIFI network status, battery level,</div> <div>Main functions:</div> <div>SPEECH RECOGNITION</div> <div><ul style="list-style-type: none">Long press the voice input button on the device (A voice button corresponds to the language on the left side of the homepage, B voice button corresponds to the language on the right side of the homepage) to enter the voice recognition mode.After releasing the button, the voice will be automatically recognized and analyzed, and translated into the set target language for voice broadcasting (the voice broadcasting mode depends on the settings).The list displays the text records of voice translation. When there are too many translation records, swipe up and down the page to view the translation records. If the translation machine is offline, the translation will automatically switch to offline translation.Click the language button at the top of the translation homepage to enter the language selection list.</div> <div>VOICE TRANSLATION</div> <div><ul style="list-style-type: none">Currently supports real-time translation between languages in 138 countries (regions) (subject to change with version updates).Click the language button at the top of the translation homepage to enter the language selection list.Click on the desired source language/target language option</div> <div>OFFLINE TRANSLATION</div> <div><ul style="list-style-type: none">It currently supports real-time translation between languages in 21 countries (regions) (changes with version updates).The package must be downloaded offline first, and initialized when there is a network.</div> <div>PHOTO TRANSLATION</div> <div><ul style="list-style-type: none">Language selection;Click the language button at the top of the photo translation homepage to enter the language selection list, and select the desired source language/target language option.Photo translation:Click on the screen to focus on the image or text that needs to be translated,Adjust the recognition range for selection,The translation result is displayed after recognition.</div> <div>SIMULTANEOUS INTERPRETATION</div>	<div><ul style="list-style-type: none">It needs to be done with network access:Supports ultra fast AI translation within 1 minute.Press and hold the A or B key for voice recognition.After exiting, you need to scan the code again for translation.Support browser/chat application scanning, synchronous display of content on mobile devices, and downloading and saving for data editing.</div> <div>QUICK CHAT TRANSLATION</div> <div><p>Join a group chat:</p><ul style="list-style-type: none">Proactively create multi person chat (prerequisite: the device has not joined any chat).After entering, share the QR code or ID number with others to form a group chat, or scan the code to enter the group chat.Scan the code or enter the device number to add a team member.<p>Member management:</p><ul style="list-style-type: none">Click the button in the upper right corner and select the member management optionClick to exit mutual translation to exit multi person translationClick on the X on the right side of the member list to achieve member management<p>Language selection:</p><ul style="list-style-type: none">Click on the language option in the upper right corner,Just choose the language you need.<p>Advanced settings:</p><ul style="list-style-type: none">Click the button in the upper right corner and select the language selection option</div> <div>REMOTE TRANSLATION</div> <div><ul style="list-style-type: none">It needs to be done with network access:Support scanning codes for multiple people (up to 3000) in browsers/chat applications.Scan the code to enter the chat interface and select the desired language option.After exiting, you need to scan the code again for translation</div> <div>INPUT TRANSLATION</div> <div><ul style="list-style-type: none">Built in Google Input Method;Click on the keyboard to download and install the required voice commands;Click on the blank area to input text, and the desired translation will appear synchronously.</div> <div>INTELLIGENT RECORDING</div> <div><ul style="list-style-type: none">The target language only supports offline translation of languages, with a duration of 60 minutes.Select the target language and translation language in the upper right corner.Click on the language switching icon in the bottom left corner to view the original text/translation.</div>	<div><ul style="list-style-type: none">During the recording process, click on the red stop icon and select save file.Click the button in the upper right corner to import the recording file for viewing.Recording text storage location: Insert into the computer - click on the Recording Translation folder.</div> <div>SETTINGS</div> <div><ul style="list-style-type: none">WIFI settings: Configure the WIFI network of the device.Broadcast mode: Automatic broadcast and manual broadcast modes can be selected. When the player switches to the plug-in mode, the translation result needs to be manually clicked to speak.System Language: Enter the language interface for selecting the device to useBluetooth: Configure and connect Bluetooth devices.Display: After entering, you can set the sleep time and choose four modes: 30s, 1 minute, 3 minutes, and never turn off the screen.Date and Time: There are two ways to set the time: automatic and manual.Clear data: Restore the device to its original state (delete user data on the device, irreversible operation).Regarding devices: View information such as the name, version number, copyright, etc. of the currently used device.</div> <div>PRACTICAL TOOLS</div> <div><ul style="list-style-type: none">The following are practical tools, including learning, calculation, etc;Follow reading, bookmarking, CHATGPT (self payment required), AI assistant (only available in China), exchange rate conversion, unit conversion, offline package management, calculator, stopwatch.</div> <div>ONLINE UPGRADE</div> <div><p>When there is a new version upgrade, the user will automatically detect the new version when switching languages/restarting or after 24 hours, supporting various network environment upgrades.</p></div>
--	--	---	--	--	--

FCC Caution:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.