

YITAHOME BFTLPT-1006

YITAHOME Portable Toilet

MODEL BFTLPT-1006 INSTRUCTION MANUAL

[Overview](#)

[Setup](#)

[Operation](#)

[Maintenance](#)

[Troubleshooting](#)

[Specifications](#)

[Warranty &](#)

[Support](#)

1. Product Overview

The YITAHOME Portable Toilet Model BFTLPT-1006 is designed for convenient and hygienic waste management in outdoor and mobile environments. It features a detachable design with a 3.2-gallon clean water tank and a 5.3-gallon sewage tank, allowing for multiple uses between emptying. The unit includes a powerful flush pump with double water outlets for effective cleaning and an instant sealing slide valve to prevent leaks and odors.

This portable toilet is constructed from durable polyethylene and acrylonitrile butadiene styrene (PE+ABS) materials, ensuring longevity and ease of cleaning. Its compact and sturdy design makes it suitable for camping, hiking, boating, and other recreational activities.

2. Setup and Assembly

Before first use, ensure all components are present and undamaged. The portable toilet consists of two main sections: the upper freshwater tank with the seat and lid, and the lower waste holding tank.

- Separate the Tanks:** Locate the side latches that connect the upper and lower tanks. Pull the latches outwards to unlock and separate the two sections.
- Fill the Freshwater Tank:** Unscrew the cap of the freshwater tank (upper section). Fill the tank with clean water. For optimal hygiene, a small amount of portable toilet chemical can be added to the freshwater tank as per the chemical manufacturer's instructions. Securely replace the cap.
- Prepare the Waste Tank:** For odor control and waste breakdown, add a recommended portable toilet chemical to the lower waste tank. This is typically done by pouring the chemical directly into the waste tank opening after separating the tanks. Refer to the chemical product's instructions for correct dosage.
- Reassemble the Toilet:** Align the upper tank with the lower tank and press them together until the side

latches click securely into place. Ensure a tight seal to prevent leaks.

Large Capacity & Detachable Design

Allow you to use many times, ranging from 110 to 120 rinses

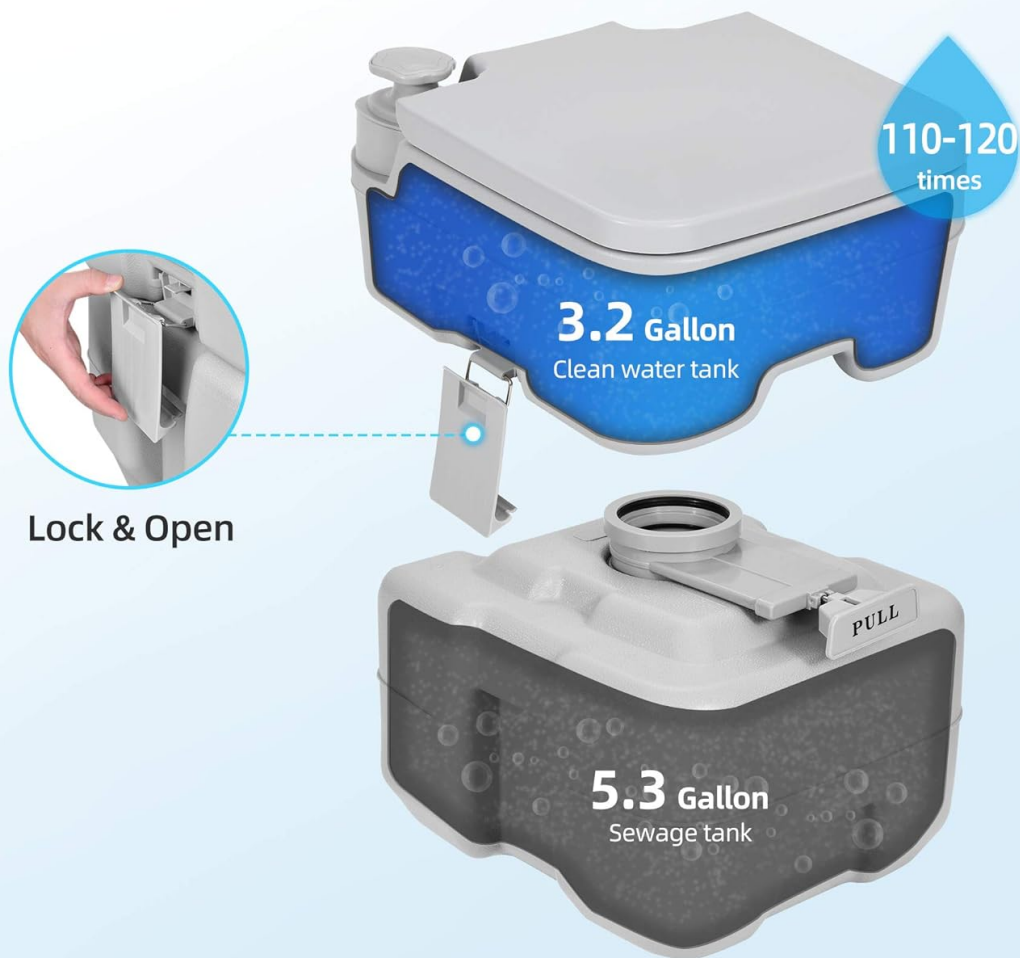


Figure 2.1: The portable toilet features a detachable design for easy filling and emptying. The upper section holds 3.2 gallons of clean water, and the lower section holds 5.3 gallons of sewage. The side latches allow for quick separation and reassembly.

3. Operating Instructions

Follow these steps for proper use of your portable toilet:

1. **Open the Slide Valve:** Before use, pull the slide valve handle located at the front of the toilet outwards to open the waste tank. This allows waste to pass into the lower tank.
2. **Use the Toilet:** Use the toilet as you would a standard household toilet.
3. **Flush:** After use, operate the flush pump (typically a plunger or bellows pump) located on the side or top of the upper tank. Pump several times to rinse the bowl with clean water from the freshwater tank. The double water outlets ensure thorough cleaning.
4. **Close the Slide Valve:** Push the slide valve handle inwards to close the waste tank. This seals the tank, preventing odors and leaks.

Flush Pump & Double Water Outlets

Powerful cleaning, no need battery or external plumbing

1 Flush Pump

2 Upgraded Double Flushing



Before



After

Figure 3.1: The flush pump and double water outlets provide powerful and efficient rinsing of the toilet bowl.

Instant Sealing Slide Valve

Effectively prevent against leakage and peculiar smell



Figure 3.2: The instant sealing slide valve effectively prevents leakage and peculiar smells when closed.

4. Maintenance and Cleaning

Regular maintenance ensures the longevity and hygienic operation of your portable toilet.

- Emptying the Waste Tank:** When the waste tank is full (or before prolonged storage), separate the upper and lower tanks. Carry the lower waste tank to an approved disposal site (e.g., RV dump station, designated waste facility). Open the emptying spout and pour out the contents. Rinse the tank thoroughly with water.
- Cleaning the Toilet:** Use a mild, non-abrasive cleaner and a soft brush or cloth to clean the toilet bowl, seat, and exterior surfaces. Avoid harsh chemicals that may damage the plastic components or seals.
- Seal Maintenance:** Periodically inspect the rubber seals on the slide valve and between the tanks for wear or damage. Lubricate seals with a silicone-based lubricant designed for portable toilets to maintain flexibility and prevent leaks.
- Storage:** Before storing, ensure both tanks are completely empty and clean. Allow all components to air dry to prevent mold and mildew. Store in a cool, dry place away from direct sunlight.

Large Emptying Spout

Completely pour out sewage without unexpected remains



Smoothly



Figure 4.1: The large emptying spout facilitates smooth and complete disposal of sewage without unexpected remains.

5. Troubleshooting

Refer to the following common issues and their solutions:

Problem	Possible Cause	Solution
Poor Flush Performance	Low water level in freshwater tank; clogged flush pump or nozzles.	Refill freshwater tank. Inspect and clean flush pump and water outlets for obstructions.
Odors Present	Slide valve not fully closed; insufficient waste tank chemical; waste tank full.	Ensure slide valve is completely closed. Add more waste tank chemical or empty the waste tank.
Leaks Between Tanks	Tanks not properly sealed; damaged or dry rubber seal.	Ensure latches are securely fastened. Inspect the seal between tanks; clean and lubricate or replace if damaged.

Problem	Possible Cause	Solution
Slide Valve Difficult to Operate	Accumulation of debris; dry or worn seal.	Clean the slide valve area. Lubricate the seal with a silicone-based lubricant.

6. Product Specifications

Key specifications for the YITAHOME Portable Toilet Model BFTLPT-1006:

Feature	Detail
Model Number	BFTLPT-1006
Color	Gray
Material	Polyethylene Acrylonitrile Butadiene Styrene (PE+ABS)
Product Dimensions (D x W x H)	38.1 cm x 45.7 cm x 43.2 cm (15 in x 18 in x 17 in)
Item Weight	6.0 kg (13.23 lbs)
Clean Water Tank Capacity	3.2 Gallons
Sewage Tank Capacity	5.3 Gallons
Weight Capacity	Up to 275 lbs
Installation Method	Floor Mount



Figure 6.1: Product dimensions and weight capacity of the YITAHOME Portable Toilet.

7. Warranty and Support

Specific warranty details for the YITAHOME Portable Toilet Model BFTLPT-1006 are not provided in this manual. For warranty information, please refer to the product packaging or contact YITAHOME customer service directly.

For technical support, replacement parts, or any inquiries not covered in this manual, please contact the manufacturer, YITAHOME, through their official website or customer service channels.