

Enlarge Your Ethernet Network

10/100Mbps WDM Media Converter with 1-Port PoE

LED Explanation

☐ PWR

On: Power on

Off: Power off

☐ Link/Act

On: Valid link

Flashing: Transmitting or receiving data

Off: Invalid link

☐ PoE


On: Supplying power normally

Off: Supplying power abnormally or no power supply

Package Contents: Converter, Power Adapter, Installation Guide

Note: The product can be mounted on the wall, but screws are not included in the package.


Scenario 1: Connect Devices with Optical Interfaces

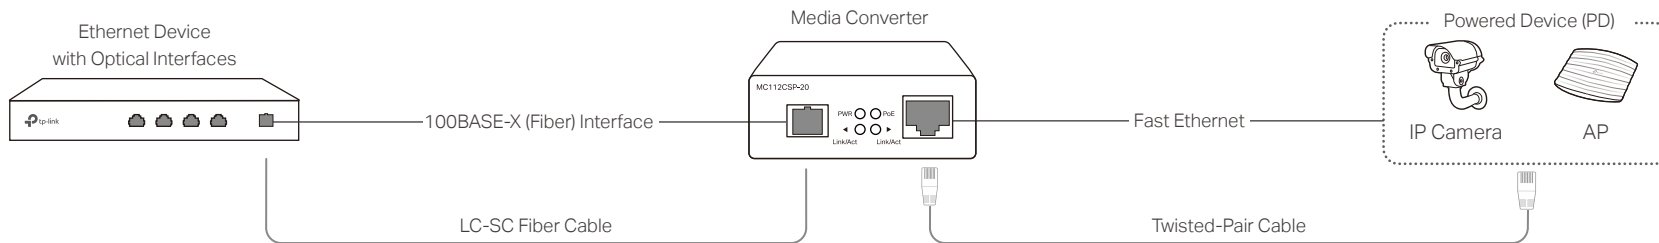

Note:

- The maximum output power of MC112CSP-20 is 15.4W. PoE devices that require more than 15.4W are not supported.
- The PoE Media Converter supplies steady power and data connectivity to a powered device such as PoE IP Camera and PoE AP.

Scenario 2: Connect Devices without Optical Interfaces

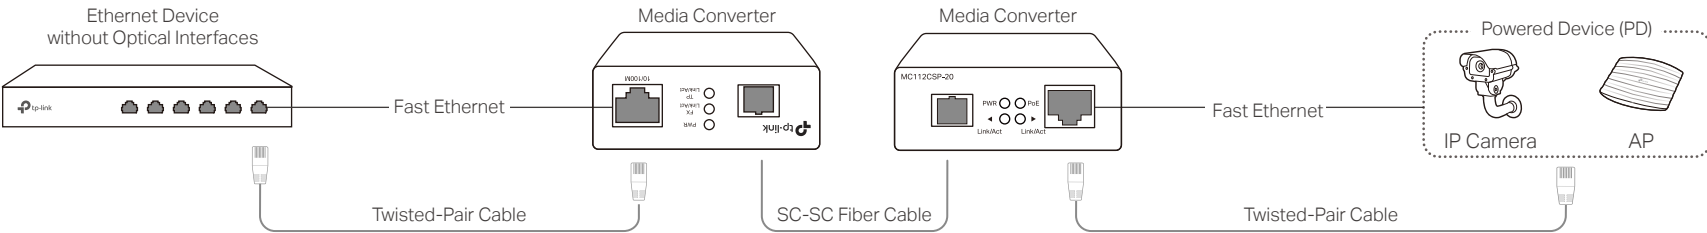

Note: Please use one MC112CSP-20 and one MC111CS together to work properly.

Specifications

General Specifications

Standards	IEEE 802.3, IEEE 802.3i, IEEE802.3u, IEEE802.3af
LED	PWR, Link/Act, PoE
Connector	1 SC fiber optic; 1 RJ45 jack
Twisted-Pair	10BASE-T: 2-pair UTP/STP of Cat. 3 or above (≤100 m)
	100BASE-TX: 2-pair UTP/STP of Cat. 5 or above (≤100 m)
	100BASE-BX10: SMF
Fiber	9/125 μm single-mode fiber
Transmission Distance	≤20 km
Wavelength	1310 nm TX, 1550 nm RX
PoE	802.3af; up to 15.4 W for the PoE port
Power	48 V/0.375 A
Dimensions	94.5*73*27 mm

Environmental and Physical Specifications

Operating Temperature	-5 °C to 50 °C (23 °F to 122 °F)
Storage Temperature	-40 °C to 70 °C (-40 °F to 158 °F)
Operating Humidity	10% to 90% RH non-condensing
Storage Humidity	5% to 90% RH non-condensing

To ask questions, find answers, and communicate with TP-Link users or engineers, please join the TP-Link Community.



For technical support and other information, please visit <https://support.omadanetworks.com/>, or simply scan the QR code.

EU declaration of conformity

TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of directives 2014/30/EU, 2014/35/EU, 2011/65/EU and (EU)2015/863. The original EU declaration of conformity may be found at <https://www.tp-link.com/en/ce>.

UK declaration of conformity

TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of the Electromagnetic Compatibility Regulations 2016 and Electrical Equipment (Safety) Regulations 2016. The original UK declaration of conformity may be found at <https://www.tp-link.com/support/ukca/>

FCC compliance information statement

Product Name: 10/100Mbps WDM Media Converter with 1-Port PoE
Model Number: MC112CSP-20
Responsible party:
TP-Link Systems Inc.
Address: 10 Mauchly, Irvine, CA 92618
Website: <https://www.tp-link.com/us/>
Tel: +1 626 333 0234
Fax: +1 909 527 6804
E-mail: sales.usa@tp-link.com

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1) This device may not cause harmful interference.
- 2) This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. We, TP-Link Systems Inc., has determined that the equipment shown as above has been shown to comply with the applicable technical standards, FCC part 15. There is no unauthorized change is made in the equipment and the equipment is properly maintained and operated.

Issue Date: 2024/11/25

Industry Canada Statement

CAN ICES-3 (A)/NMB-3(A)

CE Mark Warning

This is a class A product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

Продукт сертифіковано згідно з правилами системи УкрСЕПРО на відповідність вимогам нормативних документів та вимогам, що передбачені чинними законодавчими актами України.



Explanation of the symbols on the product label

Symbols may vary from products. The label is at the bottom of the product.

Symbol	Explanation
	Class II equipment
	Class II equipment with functional earthing
	Alternating current
	Direct current
	Polarity of d.c. power connector
	For indoor use only
	Dangerous voltage
	Caution, risk of electric shock
	Energy efficiency Marking
	Protective earth
	Earth
	Frame or chassis
	Functional earthing
	Caution, hot surface
	Caution
	Operator's manual
	Stand-by
	"ON"/"OFF" (push-push)
	Fuse
	Fuse is used in neutral N
	RECYCLING This product bears the selective sorting symbol for Waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to European directive 2012/19/EU in order to be recycled or dismantled to minimize its impact on the environment. User has the choice to give his product to a competent recycling organization or to the retailer when he buys a new electrical or electronic equipment.
	Caution, avoid listening at high volume levels for long periods
	Disconnection, all power plugs
m	Switch of mini-gap construction
μ	Switch of micro-gap construction (for US version) Switch of micro-gap /micro-disconnection construction (for other versions except US)
ε	Switch without contact gap (Semiconductor switching device)