

## WiFi & RF 2CH LED Controller

Model No.: WT1

Tuya APP cloud control/Voice control/2 Channels/Push-Dim/DC power socket input/Wireless remote control



FC CE RoHS LVD RED

### Features

- Used for control single color or color temperature LED strip.
- DC power socket input and 2 channel constant voltage output.
- Tuya APP cloud control, support on/off, color temperature and brightness adjust, delay turn on/off light, timer run, scene edit and music play function.
- Voice control, support amazon ECHO and TmallGenie smart speaker.
- Match with RF 2.4G remote control optional.
- User need set light type by press key before Tuya APP network connection and match RF remote of the same light type.
- Each WT1 controller can also work as WiFi+RF converter, then use Tuya APP to control one or more RF LED controller or RF LED dimming driver synchronously.
- Connect with external push switch to achieve on/off and 0-100% dimming function.
- Light on/off fade time 3s selectable.

### Technical Parameters

| Input and Output |                  |
|------------------|------------------|
| Input voltage    | 12-36VDC         |
| Input current    | 10.5A            |
| Output voltage   | 2 x (12-36)VDC   |
| Output current   | 2CH,5A/CH        |
| Output power     | 2 x [60-180]W    |
| Output type      | Constant voltage |


| Dimming data       |                          |
|--------------------|--------------------------|
| Input signal       | Tuya APP + RF + Push Dim |
| Control distance   | 30m(Barrier-free space)  |
| Dimming gray scale | 4096 [2*12] levels       |
| Dimming range      | 0-100%                   |
| Dimming curve      | Logarithmic              |
| PWM Frequency      | 2000Hz (default)         |

| Safety and EMC       |                                                       |
|----------------------|-------------------------------------------------------|
| EMC standard (EMC)   | ETSI EN 301 489-1 V2.2.3<br>ETSI EN 301 489-17 V3.2.4 |
| Safety standard(LVD) | EN 62368-1:2020+A11:2020                              |
| Radio Equipment(RED) | ETSI EN 300 328 V2.2.2                                |
| Certification        | CE,EMC,LVD,RED                                        |


| Environment             |                  |
|-------------------------|------------------|
| Operation temperature   | Ta:-30°C ~ +55°C |
| Case temperature (Max.) | Tc:+85°C         |
| IP rating               | IP20             |

| Warranty and Protection |                                                |
|-------------------------|------------------------------------------------|
| Warranty                | 5 years                                        |
| Protection              | Reverse polarity<br>Over-heat<br>Short circuit |

### Mechanical Structures and Installations

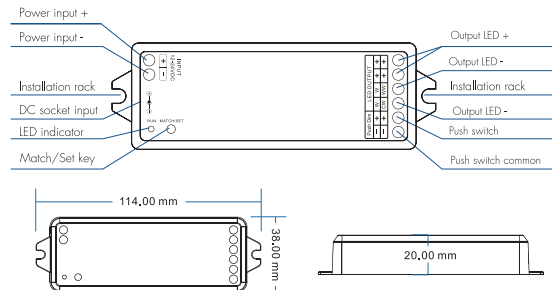


### System wiring

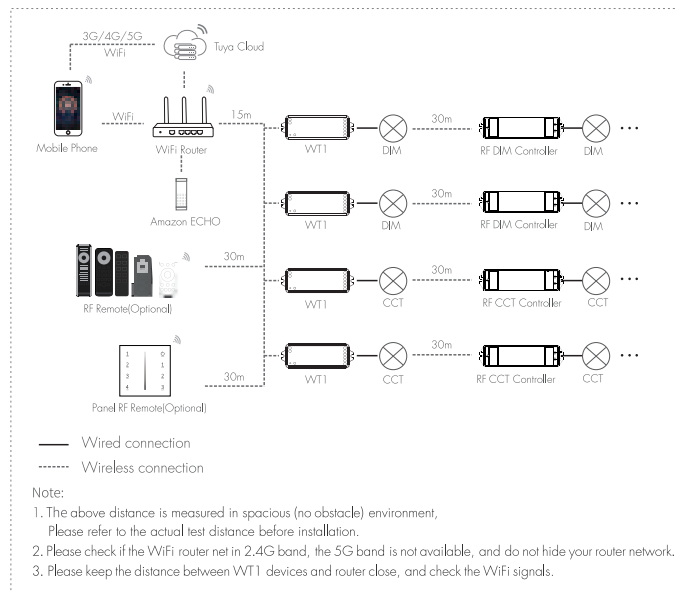


## Wiring Diagram

### • For single color

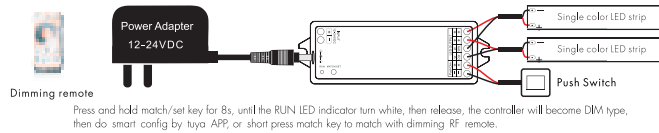

### • For dual color CCT

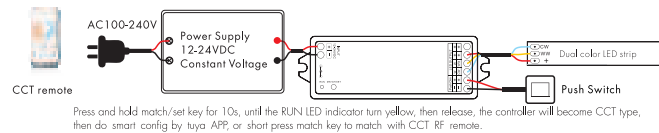

- Note: 1. User can connect constant voltage power supply or power adapter as power input.  
 2. Switch off the power, then switch on power, repeat again.  
 Immediately short press match key 3 times, the light on/off time will change between 3s and 0.5s.  
 3. For CCT light, continuous power off and on will change 3 levels color temperature (WW, NW and CW) in sequence.

## Push Dim

|                            |                          |                                                                    |
|----------------------------|--------------------------|--------------------------------------------------------------------|
| <b>DIM</b><br>Single color | Click                    | ON/OFF                                                             |
|                            | Double Click             | Turn on at 100% or 10%(night light) and vice-versa                 |
|                            | Long press(>1s) from OFF | Dimming UP/DOWN                                                    |
|                            | Long press(>1s) from ON  | Dimming UP/DOWN                                                    |
| <b>CCT</b><br>Dual Color   | Click                    | ON/OFF                                                             |
|                            | Double Click             | Turn on at 100% or 10%(night light) and vice-versa                 |
|                            | Long press(>1s) from OFF | Color temperature UP/DOWN (turn off and turn on to return dimming) |
|                            | Long press(>1s) from ON  | Dimming UP/DOWN                                                    |

## Tuya APP network connection


Press and hold Match/Set key for 2s, or push twice Match/Set key fastly, or when press and hold Match/Set key for 8 or 10s to set 2 kinds light type:  
 Clear previous network connection, enter Smart config mode, the purple LED indicator flash fastly, the output LED will flash 10 times.

Press and hold Match/Set key for 5s:  
 Clear previous network connection, enter AP config mode, the purple LED indicator flash slowly.  
 If smart config failed, please try AP config.


Repeat power on and off for 5 consecutive times, also clear previous network connection, enter Smart config mode, the output LED will flash 10 times.

If Tuya APP network connection succeed, the RUN LED indicator will stop flash purple, and turn corresponding light type color (White: DIM, Yellow: CCT).  
 and in Tuya APP, you can find DIM or CCT device.

## Tuya APP interface



DIM



CCT

**DIM:**  
 Touch brightness slide to adjust brightness.

**CCT:**  
 Touch color wheel to adjust color temperature.  
 Touch brightness slide to adjust brightness.

## WT1 match remote control (Optional)

End user can choose the suitable match/delete ways. Two options are offered for selection:

### Use the WT1's Match key

**Match:**  
 Short press match key of WT1, immediately press on/off key (single zone remote) or zone key (multiple zone remote) on the remote.  
 The LED indicator fast flash a few times means match is successful.

**Delete:**  
 Press and hold match key of WT1 for 1.5s to delete all match,  
 The LED indicator fast flash a few times means all matched remotes were deleted.

### Use Power Restart

**Match:**  
 Switch off the power of WT1, then switch on power, repeat again.  
 Immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 3 times on the remote.  
 The light blinks 3 times means match is successful.

**Delete:**  
 Switch off the power of WT1, then switch on power, repeat again.  
 Immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 5 times on the remote.  
 The light blinks 5 times means all matched remotes were deleted.

## WT1 work as WiFi:RF converter to match RF LED controller or dimming driver

End user can choose the suitable match/delete ways. Two options are offered for selection:

### Use the controller's Match key

**Match:**  
 Short press match key of the controller, immediately press on/off key on the Tuya APP.  
 The LED indicator fast flash a few times means match is successful.

**Delete:**  
 Press and hold match key of the controller for 5s,  
 The LED indicator fast flash a few times means match was deleted.

### Use Power Restart

**Match:**  
 Switch off the power of the controller, then switch on power, repeat again.  
 Immediately short press on/off key 3 times on the Tuya APP.  
 The light blinks 3 times means match is successful.

**Delete:**  
 Switch off the power of the controller, then switch on power, repeat again.  
 Immediately short press on/off key 5 times on the Tuya APP.  
 The light blinks 5 times means match was deleted.