

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Aogled](#) /

› [Aogled Daylight Lamp LED 10000 Lux User Manual - Model JSK-40](#)

## Aogled JSK-40

# Aogled Daylight Lamp LED 10000 Lux

## USER MANUAL - MODEL JSK-40

### Introduction

Thank you for choosing the Aogled Daylight Lamp LED 10000 Lux, Model JSK-40. This device is designed to provide natural, UV-free light, simulating sunlight to support your well-being. This manual provides essential information for the safe and effective use of your daylight lamp. Please read it thoroughly before use and retain it for future reference.

### Safety Instructions

- Always use the provided power adapter. Using an incompatible adapter may damage the device or pose a safety risk.
- Do not immerse the lamp in water or any other liquid.
- Keep the device away from heat sources and direct sunlight to prevent overheating.
- Do not attempt to open or repair the device yourself. Refer all servicing to qualified personnel.
- Ensure the lamp is placed on a stable, flat surface to prevent it from falling.
- This lamp is designed for indoor use only.
- Avoid direct, prolonged eye contact with the light source at close range, especially at maximum brightness.
- Keep out of reach of children.

### Package Contents

Upon unpacking, please ensure all items are present and in good condition:

- Aogled Daylight Lamp (Model JSK-40)
- Power Adapter (Input: 110-240V, Output: 20V - 0.9A)
- User Manual



Image: Contents of the Aogled Daylight Lamp package, including the lamp, power adapter, and user manual.

## Product Overview

The Aogled Daylight Lamp features intuitive touch controls for easy operation.



Image: Detailed view of the touch control panel on the Aogled Daylight Lamp, showing icons for Color Temperature, Adjustable Brightness, and Timer Setting.

- **Color Temperature Button (C):** Adjusts the light color.
- **Brightness Adjustment Button (T):** Adjusts the light intensity.
- **Timer Setting Button (B):** Sets the automatic shut-off timer.
- **Timer Indicators:** Small LEDs indicating the selected timer duration (10, 20, 30, 40, 50, 60 minutes).
- **Rotatable Stand:** Allows for flexible positioning and can be folded for portability or wall mounting.

## Small bracket, Free up more space



Image: The back of the Aogled Daylight Lamp showing the 180-degree rotatable stand and options for desk use or wall mounting.

## Setup

1. **Unpack:** Carefully remove the daylight lamp and all accessories from the packaging.
2. **Positioning:** Place the lamp on a stable, flat surface. Adjust the rotatable stand to your desired angle. For optimal results, position the lamp approximately 15-20 cm from your face. The lamp can also be mounted on a wall using the integrated mounting holes (mounting hardware not included).
3. **Connect Power:** Insert the small end of the power adapter into the DC input port on the back of the lamp. Plug the other end of the adapter into a standard electrical outlet (110-240V).

## Operating Instructions

The Aogled Daylight Lamp features touch controls for easy adjustment.

1. **Power On/Off:** Touch the power button (often integrated with the brightness or color temperature button, or a

dedicated icon) to turn the lamp on. Touch it again to turn it off.

2. **Adjusting Brightness:** Touch the 'T' (Brightness) button to cycle through 5 adjustable brightness levels. The lamp also supports stepless dimming by holding the button.
3. **Adjusting Color Temperature:** Touch the 'C' (Color Temperature) button to switch between 3 color temperature modes: Daylight White, Natural Light, and Warm White. The lamp offers a stepless range from 3000K to 6500K.
4. **Setting the Timer:** Touch the 'B' (Timer) button to activate the timer function. Each touch will cycle through the available timer settings: 10, 20, 30, 40, 50, and 60 minutes. The corresponding indicator light will illuminate. The lamp will automatically turn off after the selected duration. To deactivate the timer, cycle through the settings until no timer indicator is lit.



Image: A hand interacting with the timer button, illustrating the selection of different timer durations.



Image: Visual representation of the three color temperature settings and five brightness levels available on the lamp.

## Recommended Usage

For optimal benefits, use the daylight lamp for 20-60 minutes daily, preferably in the morning. Position the lamp so that the light is directed towards your eyes, but avoid staring directly into the light. Adjust brightness and color temperature to a comfortable level.

## Maintenance

- **Cleaning:** Ensure the lamp is unplugged before cleaning. Use a soft, dry cloth to wipe the surface of the lamp. Do not use abrasive cleaners, solvents, or harsh chemicals, as these may damage the finish.
- **Storage:** When not in use for extended periods, unplug the lamp and store it in a cool, dry place, away from direct sunlight and moisture.

## Troubleshooting

Problem	Possible Cause	Solution
Lamp does not turn on.	No power supply.	Check if the power adapter is securely plugged into both the lamp and the wall outlet. Ensure the outlet is functional.
Light flickers or is unstable.	Loose connection or power issue.	Ensure the power adapter is firmly connected. Try a different power outlet.
Touch controls are unresponsive.	Temporary software glitch or dirty sensor.	Unplug the lamp for 30 seconds, then plug it back in. Ensure the control panel is clean and dry.
Timer function not working.	Incorrect timer setting.	Ensure a specific timer duration is selected (indicated by the illuminated LED).

## Specifications

Feature	Specification
Model	JSK-40
Dimensions (L x W x H)	19 x 16 x 1 cm
Weight	430 Grams
Power	12W
Light Intensity	3000 ~ 10000 Lux (at 15 cm)
Color Temperature	Stepless 3000K ~ 6500K (3 presets)
Brightness Levels	5 adjustable levels (stepless dimmable)
Timer Settings	10, 20, 30, 40, 50, 60 minutes
Adapter Input	110-240V
Adapter Output	20V - 0.9A
UV-Free	Yes
Energy Efficiency Rating	E ( <a href="#">View EPREL Data</a> )

### Produktdatenblatt

DELEGIERTE VERORDNUNG (EU) 2019/2015 DER KOMMISSION zur Energieverbrauchskennzeichnung von Lichtquellen

Name oder Handelsmarke des Lieferanten: Aogled

Anschrift des Lieferanten: shenzhenshiaoitudianzishangwuyouxiangongsi, bao an qu zhou shi gong lu wan da gong ye qu shen zhen shi 518108 CN

Modellkennung: A-JSK40-EU

Art der Lichtquelle:

Verwendete Beleuchtungstechnologie:	LED	Ungebündelt oder gebündelt:	NDLS
Art des Sockels der Lichtquelle (oder andere elektrische Schnittstelle)	N/A		
Netzspannung/Nicht direkt an die Netzspannung angeschlossen:	MLS	Vernetzte Lichtquelle (CLS):	Nein
Farblich abstimmbare Lichtquelle:	Nein	Hülle:	-
Lichtquelle mit hoher Leuchtdichte:	Ja		
Blendschutzschild:	Ja	Dimmbar:	Ja

#### Produktparameter

Parameter	Wert	Parameter	Wert
Allgemeine Produktparameter:			
Energieverbrauch im Ein-Zustand (kWh/1000 h), auf	12	Energieeffizienzklasse	E

die nächstliegende ganze Zahl gerundet			
Nutzlichtstrom ( $\phi_{use}$ ) mit Angabe, ob sich der Wert auf den Lichtstrom in einer Kugel ( $360^\circ$ ), in einem breiten Kegel ( $120^\circ$ ) oder in einem schmalen Kegel ( $90^\circ$ ) bezieht	916 in schmalen Kegel ( $90^\circ$ )	ähnliche Farbtemperatur, gerundet auf die nächstliegenden 100 K, oder Spanne der einstellbaren ähnlichen Farbtemperaturen, gerundet auf die nächstliegenden 100 K	3000...6500
Leistungsaufnahme im Ein-Zustand ( $P_{on}$ ) in W	12,0	Leistungsaufnahme im Bereitschaftszustand ( $P_{sc}$ ) in W, auf die zweite Dezimalstelle gerundet	0,00

Seite 1 / 3

Leistungsaufnahme im vernetzten Bereitschaftsbetrieb ( $P_{sc}$ ) für CLS in W, auf die zweite Dezimalstelle gerundet	-	Farbwiedergabeindex auf die nächstliegende ganze Zahl gerundet, oder Spanne der einstellbaren CRI-Werte	80
äußere Abmessungen, ggf. ohne separates Betriebsgerät, Beleuchtungs- und Nicht-Beleuchtungsstei (Millimeter)	Höhe: 4 Breite: 17 Tiefe: 27	Spektrale Strahlungsverteilung im Bereich 250 nm bis 800 nm bei Vollast	Siehe Bild auf letzter Seite
Angabe zu einer gleichwertigen Leistungsaufnahme <sup>(a)</sup>	-	Falls ja, gleichwertige Leistungsaufnahme (W)	-
		Farbwertanteile (x und y)	0,319 0,347
<b>Parameter für LED- und OLED-Lichtquellen:</b>			
Wert des Farbwiedergabeindex	R9- 6	Lebensdauerfaktor	0,00
Lichtstromerhalt	0,00		
<b>Parameter für LED- und OLED-Netzspannungslichtquellen:</b>			
Verschiebungsfaktor ( $\cos \phi_1$ )	1,00	Farbkonsistenz in MacAdam-Ellipsen	0
Angabe, dass eine LED-Lichtquelle eine Leuchtstofflichtquelle ohne eingebautes Vorschaltgerät mit einer bestimmten Leistungsaufnahme ersetzt.	„M	Falls ja, Angabe zur ersetzten Leistungsaufnahme (W)	-
Flimmer-Messgröße (Pst LM)	0,0	Messgröße für Stroboskop-Effekte (SVM)	0,0

<sup>(a)</sup> „-“: nicht zutreffend;

<sup>(b)</sup> „-“: nicht zutreffend;

Seite 2 / 3

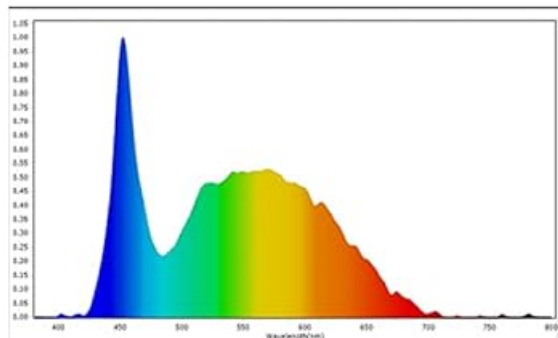


Image: EU Energy Label for the Aogled Daylight Lamp, Model A-JSK40-EU, indicating an energy efficiency rating of E.

## Warranty and Support

For warranty information or technical support, please refer to the documentation provided with your purchase or contact Aogled customer service directly. Keep your proof of purchase for any warranty claims.

© 2023 Aogled. All rights reserved.